FINAL

Schwaben Creek Watershed TMDL

Northumberland County, Pennsylvania

Prepared by:



TABLE OF CONTENTS

EXECUTIVE SUMMARY	4
TABLE 1. SUMMARY OF TMDL FOR THE SCHWABEN CREEK WATERSHED IN LBS./YR. & LBS./DAY	4
INTRODUCTION	5
TABLE 2. 303(d) AND INTEGRATED WATER QUALITY REPORT LISTED SEGMENTS	5
CLEAN WATER ACT REQUIREMENTS	6
PENNSYLVANIA CLEAN STREAMS LAW REQUIREMENTS AND AGRICULTURAL OPERA	
INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORT, LIST 5, 303 PROCESS	
TABLE 3. IMPAIRMENT DOCUMENTATION AND ASSESSMENT CHRONOLOGY	8
BASIC STEPS FOR DETERMINING A TMDL	8
TMDL ELEMENTS: MOS + WLA + LA	8
FUTURE TMDL MODIFICATIONS	8
CHANGES IN TMDLS THAT MAY REQUIRE EPA APPROVAL	9
CHANGES IN TMDLS THAT MAY NOT REQUIRE EPA APPROVAL	
TMDL APPROACH	
Table 4. Comparison of the Schwaben Creek & Bixler Run Watersheds Figure 1. Impaired Portion of Schwaben Creek Watershed Figure 2. Reference Portion of Bixler Run Watershed	10 <i>11</i>
HYDROLOGIC / WATER QUALITY MODELING	
PART 1. MODEL OVERVIEW & DATA COMPILATION	
PART 1. MODEL OVERVIEW & DATA COMPILATIONPART 2. GIS BASED DERIVATION OF INPUT DATA	
TABLE 5. GIS DATASETS	
WATERSHED ASSESSMENT AND MODELING	
Figure 1. Cattle have unobstructed access to portions of Schwaben Creek	
DEVELOPMENT OF SEDIMENT TMDL	20
TABLE 8. TMDL VALUES FOR THE SCHWABEN CREEK WATERSHED	21
MARGIN OF SAFETY	21
WASTE LOAD ALLOCATION	21
TABLE 9. WASTE LOAD ALLOCATION FOR THE SCHWABEN CREEK WATERSHED	22
LOAD ALLOCATION	
LOADS NOT REDUCED AND ADJUSTED LOAD ALLOCATION	
TABLE 10. LOAD ALLOCATIONS, LOADS NOT REDUCED AND ADJUSTED LOAD ALLOCATIONS	
TMDL SUMMARY	
	==

TABLE 11. TMDL COMPONENTS FOR THE SCHWABEN CREEK WATERSHED.	. 23
CALCULATION OF SEDIMENT LOAD REDUCTIONS	. 23
TABLE 12. SEDIMENT LOAD ALLOCATIONS/REDUCTIONS FOR LAND USES AND STREAM BANKS IN THE SCHWABEN CREEK WATERSHED, ANNUAL VALUES	. 24
TABLE 13. SEDIMENT LOAD ALLOCATIONS/REDUCTIONS FOR LAND USES AND STREAM BANKS IN THE SCHWABEN CREEK WATERSHED, DAILY VALUES	. 24
CONSIDERATION OF CRITICAL CONDITIONS	. 24
CONSIDERATION OF SEASONAL VARIATIONS	. 25
CONSIDERATION OF BACKGROUND CONTRIBUTIONS	. 25
RECOMMENDATIONS	. 25
PUBLIC PARTICIPATION	. 26
LITERATURE CITED	. 26
ATTACHMENT A	. 27
Maps of Schwaben Creek Watershed Figure A1. Schwaben Creek Watershed Figure A2. Schwaben Creek Watershed & Reference Watershed (Bixler Run)	. 28
ATTACHMENT B	. 30
EQUAL MARGINAL PERCENT REDUCTION METHOD	
ATTACHMENT C	. 33
AVGWLF GENERATED DATA TABLES TABLE C1. DATA CONTAINED IN TRANSPRT.DAT FOR THE SCHWABEN CREEK WATERSHED TABLE C2. OUTPUTS FOR THE SCHWABEN CREEK WATERSHED TABLE C3. DATA CONTAINED IN TRANSPRT.DAT FOR THE BIXLER RUN WATERSHED TABLE C4. OUTPUTS FOR THE BIXLER RUN WATERSHED	34 35 36
ATTACHMENT D	. 38
PENNSYLVANIA INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORT: STREAMS, CATEGORY 5 WATERBODIES, POLLUTANTS REQUIRING A TMDL	
ATTACHMENT E	. 47
EXCERPTS JUSTIFYING CHANGES BETWEEN THE 1998-2002 SECTION 303(d) LISTS AND THE 2004 TO PRESENT INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORTS	. 47
ATTACHMENT F	. 50
COMMENT AND DESDONSE	50

TMDL Schwaben Creek Watershed Northumberland County, Pennsylvania

Executive Summary

Schwaben Creek is a tributary of Mahanoy Creek in Northumberland County, Central Pennsylvania (PA). Unless otherwise noted, any reference to the "Schwaben Creek Watershed or Schwaben Creek" in this document refers to the impaired portion of the entire watershed.

A Total Maximum Daily Load (TMDL) for nonpoint sediment loads was developed to address impairments noted in Pennsylvania's 2002 Section 303(d) list. The impairments were documented during biological surveys of the aquatic life present in the watershed (Summer 2000). Excessive siltation resulting from agricultural activities as well as removal of vegetation has been identified as the cause of these impairments in the basin. Because Pennsylvania does not currently have water quality criteria for sediment, a TMDL endpoint for sediment was identified using a reference watershed approach. The existing sediment loading in the Schwaben Creek Watershed is 10,980,800 pounds per year (30,084 pounds per day). Based on a comparison to a similar, unimpaired watershed, Bixler Run (see Table 1 below), the maximum sediment loading that should still allow water quality objectives to be met in the Schwaben Creek Watershed is 7,009,839 pounds per year (19,205 pounds per day). Allocation of the sediment TMDL is summarized in Table 1:

Table 1. Summary of TMDL for the Schwaben Creek Watershed in lbs./yr. & lbs./day						
	Summary of	of TMDL for t	he Schwaben C	Creek Watershe	ed (lbs./yr.)	
Pollutant	TMDL	WLA	MOS	LA	LNR	ALA
Sediment	7,009,839	70,098	700,984	6,238,757	277,800	5,960,957
	Summary of TMDL for the Schwaben Creek Watershed (lbs./day)					
Pollutant	TMDL	WLA	MOS	LA	LNR	ALA
Sediment	19,205	192	1,921	17,093	761	16,331

10% of the TMDL value was reserved explicitly as a margin of safety (MOS). 1% of the TMDL value was reserved for a bulk reserve allocation for permitting and comprises the waste load allocation (WLA). The WLA is that portion of the total load assigned to National Pollutant Discharge Elimination System (NPDES) permitted point source discharges and the bulk reserve. A search of the Pennsylvania Department of Environmental Protection's (Department) efacts permit database identified no permitted facilities with point source discharges within the Schwaben Creek Watershed. The load allocation (LA) is the remaining portion of the TMDL after the MOS and WLA are removed. The LA is assigned to nonpoint sources; all sources other than the NPDES permitted point sources in the WLA. The LA is divided into loads not reduced (LNR) and the adjusted load allocation (ALA). LNR equal the sum of the forest, wetland and low intensity development loads that are not reduced. The ALA equals the sum of hay/pasture lands, croplands, unpaved roads and stream banks that are targeted for reductions. The TMDL developed for the Schwaben Creek Watershed established a 36% reduction in the current sediment loading.

Introduction

The Schwaben Creek Watershed is currently designated as Trout Stocking (TSF), PA Code 25 § 93.9m. Trout Stocked Fishes by definition states: TSF - Maintenance of stocked trout from February 15 to July 31 and maintenance and propagation of fish species and additional flora and fauna which are indigenous to a warm water habitat.

This Total Maximum Daily Load (TMDL) calculation has been prepared for all impaired segments in the Schwaben Creek Watershed (Attachment A). The impaired section of stream and its tributaries are located in Washington and Upper Mahanoy Townships, southern Northumberland County. The impaired segments of Schwaben Creek, including its tributaries, make up approximately 47.7 stream miles. The impaired watershed basin is approximately 22.48 square miles (14387.2 acres, 5822.29 hectares). Land use in this watershed is composed of forestland (41%), low intensity development (3%), and agriculture (55%) including croplands and hay/pasture.

The watershed is located in State Water Plan (SWP) Subbasin 06B and within Hydrologic Unit Code (HUC) 02050301-Lower Susquehanna. Schwaben Creek is within the Ridge and Valley physiographic province with a mean basin elevation of 819 ft. above sea level. The watershed has an 8.6 degree slope in conjunction with intensive agriculture in the tributaries and mainstem which create high velocity silt laden runoff during precipitation events, thus degrading the stream to the point of impairment. The TMDL was completed to address the impairments noted on the 2002 Pennsylvania 303(d) list, required under the Clean Water Act, and covers the listed segments listed in Table 2. Siltation from agriculture and removal of vegetation has been listed as causing the impairment. The TMDL addresses siltation from croplands, unpaved roads, stream banks and hay/pasture lands.

Table 2. 3	Table 2. 303(d) and Integrated Water Quality Report Listed Segments				
	State Water Pl	an (SWP) S	ubbasin: 06B		
HU	C: 02050301 – Lowe	r Susquehan	nna-Penns. Pennsylvania		
	Watershee	d – Schwabe	en Creek		
Source	EPA 305(b) Cause Code	Miles	Designated Use	Use Designation	
Agriculture	Agriculture Siltation 46.22 TSF Aquatic Life				
Removal of Vegetation	Siltation	31.61	TSF	Aquatic Life	

HUC= Hydrologic Unit Code

TSF= Trout Stocking

The use designations for the stream segments in this TMDL can be found in PA Title 25 Chapter 93. See Attachments D & E, for more information on the listings and listing process.

Clean Water Act Requirements

Section 303(d) of the 1972 Clean Water Act requires states, territories, and authorized tribes to establish water quality standards. The water quality standards identify the uses for each waterbody and the scientific criteria needed to support that use. Uses can include designations for drinking water supply, contact recreation (swimming), and aquatic life support. Minimum goals set by the Clean Water Act require that all waters be "fishable" and "swimmable."

Additionally, the federal Clean Water Act and the United States Environmental Protection Agency's (EPA) implementing regulations (40 CFR 130) require:

- States to develop lists of impaired waters for which current pollution controls are not stringent enough to meet water quality standards (the list is used to determine which streams need TMDLs);
- States to establish priority rankings for waters on the lists based on severity of pollution and the designated use of the waterbody; states must also identify those waters for which TMDLs will be developed and a schedule for development;
- States to submit the list of waters to EPA every two years (April 1 of the even numbered years);
- States to develop TMDLs, specifying a pollutant budget that meets state water quality standards and allocate pollutant loads among pollution sources in a watershed, e.g., point and nonpoint sources; and
- EPA to approve or disapprove state lists and TMDLs within 30 days of final submission.

Despite these requirements, states, territories, authorized tribes, and EPA have not developed many TMDLs since 1972. Beginning in 1986, organizations in many states filed lawsuits against EPA for failing to meet the TMDL requirements contained in the federal Clean Water Act and its implementing regulations. While EPA has entered into consent agreements with the plaintiffs in several states, many lawsuits still are pending across the country.

In the cases that have been settled to date, the consent agreements require EPA to backstop TMDL development, track TMDL development, review state monitoring programs, and fund studies on issues of concern (e.g., Abandoned Mine Drainage (AMD), implementation of nonpoint source BMPs, etc.).

Pennsylvania Clean Streams Law Requirements and Agricultural Operations

All Pennsylvania farmers are subject to the water quality regulations authorized under the Pennsylvania Clean Streams Law, Title 25 Environmental Protection, and found within Chapters 91-93, 96, 102 and 105. These regulations include topics such as manure management, Concentrated Animal Operations (CAOs), Concentrated Animal Feeding Operations (CAFOs), Pollution Control and Prevention at Agricultural Operations, Water Quality Standards, Water Quality Standards Implementation, Erosion and Sediment Control Requirements, and Dam Safety and Waterway Management. To review these regulations, please refer to http://pacode.com/ or the Pennsylvania Water Quality Action Packet for Agriculture which is supplied by the County

Conservation Districts. To find your County Conservation District's contact information, please refer to http://pacd.org/ or call any DEP office or the Pennsylvania Conservation Districts Headquarters at 717-238-7223.

Integrated Water Quality Monitoring and Assessment Report, List 5, 303(d), Listing Process

Prior to developing TMDLs for specific waterbodies, there must be sufficient data available to assess which streams are impaired and should be listed in the Integrated Water Quality Monitoring and Assessment Report. Prior to 2004 the impaired waters were found on the 303(d) List; from 2004 to present, the 303(d) List was incorporated into the Integrated Water Quality Monitoring and Assessment Report and found on List 5. Please see Table 3 below for a breakdown of the changes to listing documents and assessment methods through time.

With guidance from EPA, the states have developed methods for assessing the waters within their respective jurisdictions. From 1996-2006, the primary method adopted by the Pennsylvania Department of Environmental Protection for evaluating waters found on the 303(d) lists (1998-2002) or in the Integrated Water Quality Monitoring and Assessment Report (2004-2006) was the Statewide Surface Waters Assessment Protocol (SSWAP). SSWAP was a modification of the EPA Rapid Bioassessment Protocol II (RPB-II) and provided a more consistent approach to assessing Pennsylvania's streams.

The assessment method required selecting representative stream segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selected as many sites as necessary to establish an accurate assessment for a stream segment; the length of the stream segment could vary between sites. All the biological surveys included kick-screen sampling of benthic macroinvertebrates, habitat surveys, and measurements of pH, temperature, conductivity, dissolved oxygen, and alkalinity. Benthic macroinvertebrates were identified to the family level in the field.

The listings found in the Integrated Water Quality Monitoring and Assessment Reports from 2008 to present were derived based on the Instream Comprehensive Evaluation protocol (ICE). Like the SSWAP protocol that preceded the ICE protocol, the method requires selecting representative segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selects as many sites as necessary to establish an accurate assessment for a stream segment; the length of the stream segment could vary between sites. All the biological surveys include D-frame kicknet sampling of benthic macroinvertebrates, habitat surveys, and measurements of pH, temperature, conductivity, dissolved oxygen, and alkalinity. Collected samples are returned to the laboratory where the samples are then subsampled to obtain a benthic macroinvertebrate sample of 200 + or - 20% (160 to 240). The benthic macroinvertebrates in this subsample were then identified to the generic level. The ICE protocol is a modification of the EPA Rapid Bioassessment Protocol III (RPB-III) and provides a more rigorous and consistent approach to assessing Pennsylvania's streams than the SSWAP.

After these surveys (SSWAP, 1998-2006 lists or ICE, 2008-present lists) were completed, the biologist determined the status of the stream segment. The decision was based on the performance of the segment using a series of biological metrics. If the stream segment was classified as impaired,

it was then listed on the state's 303(d) List or presently the Integrated Water Quality Monitoring and Assessment Report with the source and cause documented.

Once a stream segment is listed as impaired, a TMDL must be developed for it. A TMDL addresses only one pollutant. If a stream segment is impaired by multiple pollutants, all of those pollutants receive separate and specific TMDLs within that stream segment. In order for the TMDL process to be most effective, adjoining stream segments with the same source and cause listing are addressed collectively on a watershed basis.

Table 3. Impairment Documentation and Assessment Chronology				
Listing Date	Listing Date Listing Document Assessment Method			
1998	303(d) List	SSWAP		
2002	303(d) List	SSWAP		
2004	Integrated List	SSWAP		
2006	Integrated List	SSWAP		
2008-Present	Integrated List	ICE		

Integrated List= Integrated Water Quality Monitoring and Assessment Report

SSWAP= Statewide Surface Waters Assessment Protocol

ICE= Instream Comprehensive Evaluation Protocol

Basic Steps for Determining a TMDL

Although all watersheds must be handled on a case-by-case basis when developing TMDLs, there are basic processes or steps that apply to all cases. They include:

- 1. Collection and summarization of pre-existing data (watershed characterization, inventory contaminant sources, determination of pollutant loads, etc.);
- 2. Calculate TMDL for the waterbody using EPA approved methods and computer models;
- 3. Allocate pollutant loads to various sources;
- 4. Determine critical and seasonal conditions;
- 5. Submit draft report for public review and comments; and
- 6. EPA approval of the TMDL.

TMDL Elements: MOS + WLA + LA

A TMDL equation consists of a margin of safety (MOS), wasteload allocation (WLA) and load allocation (LA). The MOS is applied to account for uncertainties in the computational process. The MOS may be expressed implicitly by documenting conservative processes in the computations or explicitly by setting aside a portion of the allowable load. The WLA is the portion of the load assigned to a bulk reserve permitting allocation and to point sources that have National Pollutant Discharge Elimination System (NPDES) permitted discharges. The LA is the portion of the load assigned to nonpoint sources, all sources other than WLA.

Future TMDL Modifications

In the future, the Department may adjust the load and/or wasteload allocations in this TMDL to account for new information or circumstances that are developed or discovered during the

implementation of the TMDL when a review of the new information or circumstances indicate that such adjustments are appropriate. Adjustment between the load and wasteload allocation will only be made following an opportunity for public participation. A wasteload allocation adjustment will be made consistent and simultaneous with associated permit(s) revision(s)/reissuances (i.e., permits for revision/reissuance in association with a TMDL revision will be made available for public comment concurrent with the related TMDLs availability for public comment). New information generated during TMDL implementation may include, among other things, monitoring data, best management practice (BMP) effectiveness information, and land use information. All changes in the TMDL will be tallied and once the total changes exceed 1% of the total original TMDL allowable load, the TMDL will be revised. The adjusted TMDL, including its LAs and WLAs, will be set at a level necessary to implement the applicable water quality standards (WQS) and any adjustment increasing a WLA will be supported by reasonable assurance demonstration that load allocations will be met. The Department will notify EPA of any adjustments to the TMDL within 30 days of its adoption and will maintain current tracking mechanisms that contain accurate loading information for TMDL waters.

Changes in TMDLs That May Require EPA Approval

- Increase in total load capacity.
- Transfer of load between point (WLA) and nonpoint (LA) sources.
- Modification of the margin of safety (MOS).
- Change in water quality standards (WQS).
- Non-attainment of WQS with implementation of the TMDL.
- Allocation transfers in trading programs.

Changes in TMDLs That May Not Require EPA Approval

- Total loading shift less than or equal to 1% of the total load.
- Increase of WLA results in greater LA reductions provided reasonable assurance of implementation is demonstrated (a compliance/implementation plan and schedule).
- Changes among WLAs with no other changes; TMDL public notice concurrent with permit public notice.
- Removal of a pollutant source that will not be reallocated.
- Reallocation between LAs.
- Changes in land use.

TMDL Approach

The TMDL developed for the Schwaben Creek Watershed addresses sediment from agriculture and loss of vegetation. Because neither Pennsylvania nor EPA has water quality criteria for sediment, a method was developed to determine water quality objectives for this pollutant that should result in the impaired stream segments attaining their designated uses. The method employed for this TMDL is termed the Reference Watershed Approach.

Selection of the Reference Watershed

The reference watershed approach was used to estimate the appropriate sediment loading reduction necessary to restore healthy aquatic communities to the impaired watershed, Schwaben Creek. This approach is based on selecting a non-impaired, reference, watershed and estimating its current loading rates for the pollutants of concern. The objective of the process is to reduce loading rates of those pollutants to a level equivalent to or lower than the loading rates in the reference watershed. Achieving the appropriate load reductions should allow the return of a healthy biological community to affected stream segments.

First, there are three factors that should be considered when selecting a suitable reference watershed: impairment status, similarity of physical properties, and size of the watershed. A watershed that the Department has assessed and determined to be attaining water quality standards should be used as the reference. Second, a watershed that closely resembles the impaired watershed in physical properties such as land use/land cover, physiographic province, elevation, slope and geology should be chosen. Finally, the size of the reference watershed should be within 30% of the impaired watershed area.

The search for a reference watershed that would satisfy the above characteristics was done by means of a desktop screening using several GIS shapefiles, including a watershed layer, geologic formations layer, physiographic province layer, soils layer, Landsat-derived land cover/use grid, and the stream assessment information found on the Department's Instream Comprehensive Evaluation Protocol (ICE) GIS-based website. The suitability of the chosen watershed was confirmed through discussions with Department staff as well as through field verification of conditions.

Bixler Run was selected as the reference watershed for developing the Schwaben Creek Watershed TMDL. Bixler Run is a tributary to Sherman Creek which eventually flows into the Susquehanna River. Bixler Run is located in parts of Saville, Northeast Madison, Southwest Madison and Tyrone Townships, Perry County, Pennsylvania. The watershed is located in the Ridge and Valley physiographic province in State Water Plan (SWP) sub-basin 07A. Bixler Run is identified in ICE as attaining its designated uses. The attainment of designated uses is based on biological sampling done by the Department. Table 4 compares the two watersheds in terms of size, location, and other physical characteristics.

Table 4. Comparison of the Schwaben Creek & Bixler Run Watersheds				
	Schwaben Creek	Bixler Run Watershed		
	Watershed			
Physiographic Province	Ridge and Valley	Ridge and Valley		
Area, ac	14,387	12,625		
Land Use Distribution				
% Agriculture	55	46		
% Forest	41	49		
% Other	3	5		
Dominant Soil Group	С	С		
Dominant Surface Geology	Interbedded Sedimentary	Interbedded Sedimentary		
Average Rainfall, inches	39.30, 19 years	38.43, 19 years		
Average Runoff, inches	3.11, 19 years	2.74, 19 years		

The analysis of value counts for each pixel of the Multi-Resolution Land Characterization (MRLC) grid revealed that land cover/use distributions in both watersheds are similar. Agriculture is the dominant non forested land use category in the Schwaben Creek and Bixler Run watersheds, 55% and 46%, respectively.

Schwaben Creek and Bixler Run lie within the Ridge and Valley Physiographic Province. The dominant Surface geology in both watersheds consists of clastic sedimentary rocks thus producing similar influences on the sediment loads among them.

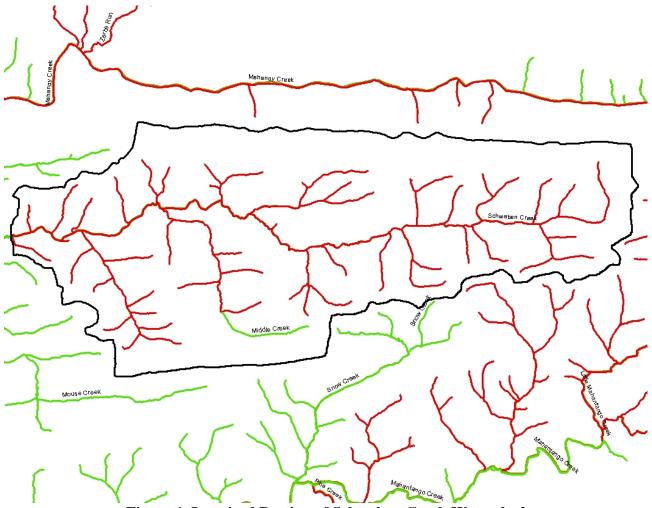


Figure 1. Impaired Portion of Schwaben Creek Watershed

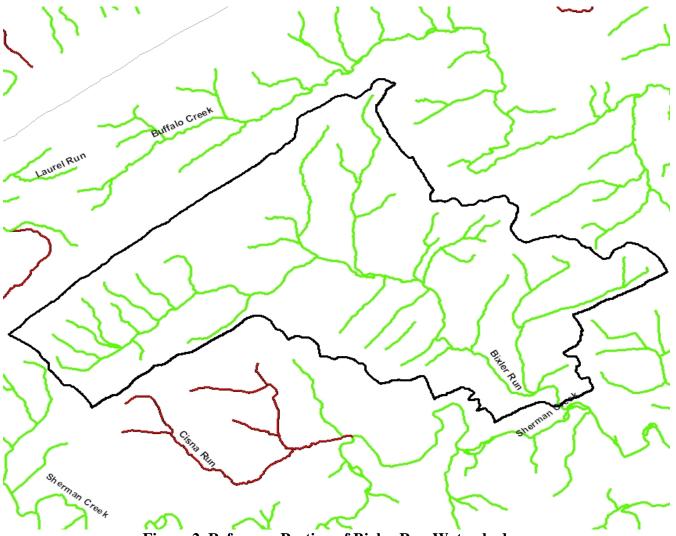


Figure 2. Reference Portion of Bixler Run Watershed

Hydrologic / Water Quality Modeling

Part 1. Model Overview & Data Compilation

The TMDL for this watershed was calculated using the ArcView Generalized Watershed Loading Function (AVGWLF) Interface for Windows, version 7.2.3. The remaining paragraphs in this section are excerpts from the GWLF User's Manual (Haith et al., 1992).

The core watershed simulation model for the AVGWLF software application is the GWLF (Generalized Watershed Loading Function) model developed by Haith and Shoemaker. The original DOS version of the model was re-written in Visual Basic by Evans et al. (2002) to facilitate integration with ArcView, and tested extensively in the U.S. and elsewhere.

The GWLF model provides the ability to simulate runoff and sediment load from a watershed given variable-size source areas (i.e., agricultural, forested, and developed land). It is a continuous simulation model that uses daily time steps for weather data and water balance calculations.

Monthly calculations are made for sediment loads based on the daily water balance accumulated to monthly values.

GWLF is considered to be a combined distributed/lumped parameter watershed model. For surface loading, it is distributed in the sense that it allows multiple land use/cover scenarios, but each area is assumed to be homogenous in regard to various attributes considered by the model. Additionally, the model does not spatially distribute the source areas, but simply aggregates the loads from each source area into a watershed total; in other words there is no spatial routing. For sub-surface loading, the model acts as a lumped parameter model using a water balance approach. No distinctly separate areas are considered for sub-surface flow contributions. Daily water balances are computed for an unsaturated zone as well as a saturated sub-surface zone, where infiltration is simply computed as the difference between precipitation and snowmelt minus surface runoff plus evapotranspiration.

With respect to the major processes simulated, GWLF models surface runoff using the Soil Conservation Service Curve Number, or SCS-CN, approach with daily weather (temperature and precipitation) inputs. Erosion and sediment yield are estimated using monthly erosion calculations based on the Universal Soil Loss Equation USLE algorithm (with monthly rainfall-runoff coefficients) and a monthly composite of KLSCP values for each source area (i.e., land cover/soil type combination). The KLSCP factors are variables used in the calculations to depict changes in soil loss erosion (K), the length slope factor (LS), the vegetation cover factor (C), and the conservation practices factor (P). A sediment delivery ratio based on watershed size and transport capacity, which is based on average daily runoff, is then applied to the calculated erosion to determine sediment yield for each source area. Evapotranspiration is determined using daily weather data and a cover factor dependent upon land use/cover type. Finally, a water balance is performed daily using supplied or computed precipitation, snowmelt, initial unsaturated zone storage, maximum available zone storage, and evapotranspiration values.

For execution, the model requires two separate input files containing transport and weather-related data. The transport (transport.dat) file defines the necessary parameters for each source area to be considered (e.g., area size, curve number, etc.) as well as global parameters (e.g., initial storage, sediment delivery ratio, etc.) that apply to all source areas. The weather (weather.dat) file contains daily average temperature and total precipitation values for each year simulated.

Since its initial incorporation into AVGWLF, the GWLF model has been revised to include a number of routines and functions not found in the original model. For example, a significant revision in one of the earlier versions of AVGWLF was the inclusion of a streambank erosion routine. This routine is based on an approach often used in the field of geomorphology in which monthly streambank erosion is estimated by first calculating a watershed-specific lateral erosion rate (LER). After a value for LER has been computed, the total sediment load generated via streambank erosion is then calculated by multiplying the above erosion rate by the total length of streams in the watershed (in meters), the average streambank height (in meters), and the average soil bulk density (in kg/m3).

The inclusion of the various model enhancements mentioned above has necessitated the need for several more input files than required by the original GWLF model, including a "scenario" (*.scn)

file, an animal data (animal.dat) file. Also, given all of the new and recent revisions to the model, it has been renamed "GWLF-E" to differentiate it from the original model.

As alluded to previously, the use of GIS software for deriving input data for watershed simulation models such as GWLF is becoming fairly standard practice due to the inherent advantages of using GIS for manipulating spatial data. In this case, a customized interface developed by Penn State University for ArcView GIS software (versions 3.2 or 3.3) is used to parameterize input data for the GWLF-E model. In utilizing this interface, the user is prompted to load required GIS files and to provide other information related to various "non-spatial" model parameters (e.g., beginning and end of the growing season; the months during which manure is spread on agricultural land, etc.). This information is subsequently used to automatically derive values for required model input parameters which are then written to the appropriate input files needed to execute the GWLF-E model. Also accessed through the interface are Excel-formatted weather files containing daily temperature and precipitation information. (In the version of AVGWLF used in Pennsylvania, a statewide weather database was developed that contains about twenty-five (25) years of temperature and precipitation data for seventy-eight (78) weather stations around the state). This information is used to create the necessary weather dat input file for a given watershed simulation.

Part 2. GIS Based Derivation of Input Data

The primary sources of data for this analysis were geographic information system (GIS) formatted databases and shapefiles. In using the AVGWLF interface, the user is prompted to identify required GIS files and to provide other information related to "non-spatial" model parameters (e.g. beginning and end of growing season, manure spreading period, etc.). This information is subsequently used to automatically derive values for required model input parameters, which are then written to the TRANSPRT.DAT and WEATHER.DAT input files needed to execute the GWLF model. For use in Pennsylvania, AVGWLF has been linked with statewide GIS data layers such as land use/cover, soils, topography and physiography; and includes location-specific default information such as cropping practices. Complete GWLF-formatted weather files are also included for the seventy-eight weather stations around the state.

Table 5 lists GIS datasets and shapefiles used for these TMDL calculations via AVGWLF and provides explanations of how they were used for development of the input files for the GWLF model.

Table 5. GIS Datasets			
DATASET	DESCRIPTION		
county.shp	The county boundaries coverage lists data on conservation practices which provides C and P values in the Universal Soil Loss Equation (USLE).		
padem	100 meter digital elevation model; this is used to calculate landslope and slope length.		
palumrlc	A satellite image derived land cover grid which is classified into 15 different landcover categories. This dataset provides landcover loading rates for the different categories in the model.		
physprov.shp	A shapefile of physiographic provinces. This is used in rainfall erosivity calculations.		
smallsheds.shp	A coverage of watersheds derived at 1:24,000 scale. This coverage is used with the stream network to delineate the desired level watershed.		
streams.shp	The 1:24,000 scale single line stream coverage of Pennsylvania. Provides a complete network of streams with coded stream segments.		
PAgeo	A shapefile of the surface geology used to compare watersheds of similar qualities.		
weathersta.shp	Historical weather files for stations around Pennsylvania to simulate flow.		
soils.shp	A shapefile providing soil characteristics data. This is used in multiple calculations.		
zipcodes.shp	This shapefile provides animal density numbers used in the LER calculation.		

In the GWLF model, the nonpoint source load calculated is affected by terrain conditions such as amount of agricultural land, land slope, and inherent soil erodibility. It is also affected by farming practices utilized in the area. Various parameters are included in the model to account for these conditions and practices. Some of the more important parameters are summarized below:

Areal extent of different land use/cover categories: This is calculated directly from a GIS layer of land use/cover

Curve number: This determines the amount of precipitation that infiltrates into the ground or enters surface water as runoff. It is based on specified combinations of land use/cover and hydrologic soil type, and is calculated directly using digital land use/cover and soils layers.

K factor: This factor relates to inherent soil erodibility, and affects the amount of soil erosion taking place on a given unit of land.

LS factor: This factor signifies the steepness and length of slopes in an area and directly affects the amount of soil erosion.

C factor: This factor is related to the amount of vegetative cover in an area. In agricultural areas, the crops grown and the cultivation practices utilized largely control this factor. Values range from 0 to 1.0, with larger values indicating greater potential for erosion.

P factor: This factor is directly related to the conservation practices utilized in agricultural areas. Values range from 0 to 1.0, with larger values indicating greater potential for erosion.

Sediment delivery ratio: This parameter specifies the percentage of eroded sediment that is delivered to surface water and is empirically based on watershed size.

Unsaturated available water-holding capacity: This relates to the amount of water that can be stored in the soil and affects runoff and infiltration. It is calculated using a digital soils layer.

Other less important factors that can affect sediment loads in a watershed are also included in the model.

The above parameter descriptions were taken from the AVGWLF Version 7.1 Users Guide (Evans et al., 2007).

Watershed Assessment and Modeling

The AVGWLF model was used to establish existing loading conditions for the Schwaben Creek and the Bixler Run Watersheds. All AVGWLF data and outputs have been attached to this TMDL as Attachment C. Department staff visited the Schwaben Creek Watershed and the Bixler Run Watershed to get a better understanding of existing conditions that might influence the AVGWLF model.

Schwaben Creek Watershed (impaired)

- limited or absent riparian buffers in the agricultural areas
- mowing up to the stream bank
- streambank erosion
- livestock in the stream
- erosion channels

Bixler Run Watershed (reference)

- forested riparian buffers
- contour farming practices
- livestock exclusion fencing and rotational grazing

Based on field observations adjustments may be made to specific parameters used in the AVGWLF model. Any adjustments were as follows:

Schwaben Creek Watershed

 A minor adjustment of the C factor to 0.35 to reflect cropping practices in Schwaben Creek Watershed

Bixler Run Watershed

No changes to the model were necessary for the Bixler Run Watershed.



Figure 1. Cattle have unobstructed access to portions of Schwaben Creek



Figure 2. Unpaved road erosion in Schwaben Creek Watershed



Figure 3. Extensive bank erosion in Schwaben Creek Watershed



Figure 4. Streambank fencing in the Bixler Creek Watershed



Figure 5. Cover crops and riparian buffer evident in the Bixler Creek Watershed

The AVGWLF model produced area information and sediment loading based on land use (Tables 6 and 7).

Table 6. Existing Loading Values for Schwaben Creek (impaired)				
Source	Area (ac)	Sediment (lbs)	Unit Area Load, (lbs/ac/yr)	
HAY/PAST	2,963	304,800	103	
CROPLAND	5,019	9,329,800	1,859	
FOREST	5,950	255,800	43	
WETLAND	7	0	0	
UNPAVED_RD	49	113,000	2,287	
TRANSITION	20	5,600	283	
LO_INT_DEV	378	16,400	43	
Stream Bank		955,400		
TOTAL	14,387	10,980,800	763	

Table 7. Existing Loading Values for Bixler Run (reference)				
Source	Area	Sediment (lbs)	Unit Area Load,	
Source	(ac)	Sedifficit (108)	(lb/ac/yr)	
HAY/PAST	3,047	376,600	124	
CROPLAND	2,750	4,614,600	1,678	
FOREST	6,207	241,200	39	
WETLAND	121	200	2	
UNPAVED_RD	3	1,400	560	
TRANSITION	12	4,400	355	
LO_INT_DEV	484	22,600	47	
Stream Bank		890,400		
TOTAL	12,625	6,151,400	487	

For Tables 6 and 7 the "stream bank" sediment loads are calculated by AVGWLF's stream bank routine. This routine uses linear stream bank miles rather than area.

Development of Sediment TMDL

The target TMDL value for the Schwaben Creek Watershed was established based on current loading rates for sediment in the Bixler Run reference watershed. Bixler Run is currently designated as a Cold Water Fishes (CWF) and previous biological assessments have determined that the portion of the basin used as a reference is attaining its designated uses. Reducing the loading rates of sediment in the Schwaben Creek Watershed (TSF) to levels equal to, or less than, the reference watershed should allow for the reversal of current use impairments. The aquatic life use survey is the same for both TSF and CWF and have the same threshold for impairment; therefore, Bixler Run (CWF) is an appropriate reference for the Schwaben Creek watershed (TSF).

As described in the previous section, sediment loading rates were computed for the Bixler Run Watershed using the AVGWLF model. The target TMDL value for sediment was determined by multiplying the unit area loading rates for the Bixler Run Watershed by the total watershed area of the Schwaben Creek Watershed (Table 8).

	Table 8. TMDL Values for the Schwaben Creek Watershed					
Pollutant	Loading Rate in Reference, (lb/ac/yr)	Total Area in Schwaben Creek Watershed, (ac)	Target TMDL Value, (lb/yr)	Target TMDL Value, (lb/day)		
Sediment	487	14,387	7,009,839*	19,205		

^{*} takes into account rounding in previous calculations

The target TMDL value was then used as the basis for load allocations and reductions in the Schwaben Creek Watershed, using the following equations:

$$TMDL = MOS + WLA + LA$$

 $LA = ALA* + LNR$

where:

TMDL = Total Maximum Daily Load

MOS = Margin of Safety

WLA = Waste Load Allocation (Point Sources)

LA = Load Allocation (Nonpoint Sources)

ALA = Adjusted Load Allocation*

LNR = Loads Not Reduced

*source loads targeted for reduction

Margin of Safety

The margin of safety (MOS) is that portion of the pollutant loading that is reserved to account for any uncertainty in the data and computational methodology used for the analysis. For this analysis, the MOS is explicit. Ten percent of the targeted TMDL for sediment was reserved as the MOS. Using 10% of the TMDL load is based on professional judgment and will provide an additional level of protection to the designated uses of Schwaben Creek.

7,009,839 lbs/yr TMDL * 0.1 = 700,984 lbs/yr MOS

Waste Load Allocation

The waste load allocation (WLA) portion of the TMDL equation is the sum of the pollutant loading assigned to permitted point sources and a bulk reserve. Each point source discharge in a watershed is assigned pollutant limits found in its accompanying National Pollutant Discharge Elimination System (NPDES) permit. These limits are used to calculate the sediment loadings included in the WLA. The bulk reserve is explicit and is calculated as one percent of the targeted TMDL. This bulk reserve enables the TMDL to account for the dynamic nature of permit activity. There are currently no NPDES permitted discharges in the Schwaben Creek Watershed therefore the bulk reserve equals the total WLA.

Table 9. Waste Load Allocation for the Schwaben Creek Watershed				
	Sediment (lb/yr) Sediment (lb/day)			
Bulk Reserve	70,098	192		

Load Allocation

The load allocation (LA) is the portion of the TMDL assigned to nonpoint sources, all sources other than permitted sources. The LA contains loads targeted for reduction and background loads that are not targeted for reduction. The LA for sediment was computed by subtracting the MOS and WLA values from the TMDL value.

7,009,839 lbs/yr TMDL - 700,984 lbs/yr MOS - 70,098 lbs/yr WLA = 6,238,757 lbs/yr LA

Loads Not Reduced and Adjusted Load Allocation

The Load Allocation (LA) is comprised of loads not reduced (LNR) and the adjusted load allocation (ALA). The loads not reduced (LNR) are the nonpoint source loads in the watershed that are not targeted for reduction. The adjusted load allocation (ALA) is the nonpoint source loads that are targeted to receive reductions in order to attain the overall TMDL reduction goal. The ALA is the base TMDL element that all non-point source loads being reduced must collectively not exceed and is calculated as follows:

The sum of the loads not reduced (LNR) is calculated first.

255,800 lbs/yr Forest + 0 lbs/yr Wetland + 16,400 lbs/yr Low Intensity Development + 5,600 lbs/yr = 277,800 lbs/yr LNR

Then the sum of the LNR is subtracted from the LA, Table 10.

$$6,238,757$$
 lbs/yr LA $-277,800$ lbs/yr Σ LNR = $5,960,957$ lbs/yr ALA

The ALA is further analyzed using the Equal Marginal Percent Reduction (EMPR) allocation method described in Attachment B. EMPR calculates the sediment load reductions per targeted sources in order to meet the TMDL. Although the Schwaben Creek Watershed TMDL was developed to address impairments caused by agricultural activities such as hay/pastureland and cropland, these sources were not the only sources considered for reductions. Unpaved roads and stream banks are also significant contributors to the sediment load in the watershed and were included into the ALA and targeted for reduction, Tables 12 and 13.

Table 10. Load Allocations, Loads Not Reduced and Adjusted Load Allocations			
	Sediment (lbs/yr) Sediment (lbs/		
Load Allocation (LA)	6,238,757	17,092	
Loads Not Reduced (LNR):			
Forest	255,800	701	
Wetland	0	0	
Lo_Int_Dev	16,400	45	
Transition	5,600	15	
Adjusted Load Allocation (ALA)	5,960,957	16,331	

TMDL Summary

The sediment TMDL established for the Schwaben Creek Watershed consists of a Margin of Safety (MOS), Waste Load Allocation (WLA) and Load Allocation (LA). The LA is broken into Loads Not Reduced (LNR) and Adjusted Load Allocation (ALA) for further analysis. The individual components of the Schwaben Creek Watershed TMDL are summarized in Table 11.

Table 11. TMDL Components for the	e Schwaben Creek W	atershed		
Component TMDL (Total Maximum Daily Load) MOS (Margin of Safety) WLA (Waste Load Allocation) LA (Load Allocation) LNR Loads Not Reduced)	Sediment (lbs./yr.)	Sediment (lbs./day)		
TMDL (Total Maximum Daily Load)	7,009,839	19,205		
MOS (Margin of Safety)	700,984	1,921		
WLA (Waste Load Allocation)	70,098	192		
LA (Load Allocation)	6,238,757	17,092		
LNR Loads Not Reduced)	277,800	761		
ALA (Adjusted Load Allocation)	5,960,957	16,331		

Calculation of Sediment Load Reductions

The adjusted load allocation (ALA) established in the previous section represents the sediment load that is available for allocation between Hay/Pasture, Cropland, unpaved roads and stream banks in the Schwaben Creek Watershed. Data needed for load reduction analyses, including land use distribution, were obtained by GIS analysis. The Equal Marginal Percent Reduction (EMPR) allocation method, Attachment B, was used to distribute the ALA between the three land use types and stream banks. The process is summarized below:

- 1. Each land use/source load is compared with the total allocable load to determine if any contributor would exceed the allocable load by itself. The evaluation is carried out as if each source is the only contributor to the pollutant load to the receiving waterbody. If the contributor exceeds the allocable load, that contributor would be reduced to the allocable load. This is the baseline portion of EMPR. For this evaluation cropland was in excess of the ALA.
- 2. After any necessary reductions have been made in the baseline, the multiple analyses are run. The multiple analyses will sum all of the baseline loads and compare them to the total allocable load. If the allocable load is exceeded, an equal percent reduction will be

made to all contributors' baseline values. After any necessary reductions in the multiple analyses, the final reduction percentage for each contributor can be computed. For this evaluation the allocable load was exceeded. The equal percent reduction, i.e., the ALA divided by the summation of the baselines, worked out to a 19% reduction for Hay/pasture, unpaved roads and stream banks. A 44% reduction is required for cropland.

Tables 12 and 13 contain the results of the EMPR for Hay/Pasture, Cropland, unpaved roads and stream banks in the Schwaben Creek Watershed. The load allocation for each land use is shown along with the percent reduction of current loads necessary to reach the targeted ALA.

Table 12. S	ediment			s for Land Use ed, Annual Va		n Banks in the
		Allowable Loading	Load Allocation	Current Loading	Current Load	
Land Use	Acres	lbs/acre/yr	lbs./yr	lbs/acre/yr	lbs/yr	% Reduction
Cropland	5019	965.36	4,844,866	1859.01	9,329,800	48%
Hay/Pasture	2963	83.61	247,731	102.88	304,800	19%
Unpaved Roads	49	1859.16	91,843	2287.45	113,000	19%
Stream Banks			776,517		955,400	19%
Table 13. S	ediment					n Banks in the
		Schwaben	Creek Watersl	hed, Daily Valu	1es	
		Allowable	Load	Current	Current	

				~	~	
		Allowable	Load	Current	Current	
		Loading	Allocation	Loading	Load	
Land Use	Acres	lbs/acre/da y	lbs/day	lbs./acre/day	lbs/day	% Reduction
Cropland	5019	2.64	13,274	5.09	25,561	48%
Hay/Pasture	2963	0.23	679	0.28	835	19%
Unpaved Roads	49	5.09	252	6.27	310	19%
Stream banks			2,127		2,618	19%

Consideration of Critical Conditions

The AVGWLF model is a continuous simulation model, which uses daily time steps for weather data and water balance calculations. Monthly calculations are made for sediment loads, based on daily water balance accumulated in monthly values. Therefore, all flow conditions are taken into account for loading calculations. Because there is generally a significant lag time between the introduction of sediment to a waterbody and the resulting impact on beneficial uses, establishing this TMDL using average annual conditions is protective of the waterbody.

Consideration of Seasonal Variations

The continuous simulation model used for this analysis considers seasonal variation through a number of mechanisms. Daily time steps are used for weather data and water balance calculations. The model requires specification of the growing season and hours of daylight for each month. The model also considers the months of the year when manure is applied to the land. The combination of these actions by the model accounts for seasonal variability.

Consideration of Background Contributions

The AVGWLF model accounts for all landuses within the watershed and their respective contributions to the sediment load. The background sources of sediment within the watershed would be from low intensity development, forested and wetland areas. There are no additional upstream sources of sediment to this watershed as the entire Schwaben Creek Watershed including all headwaters was assessed and modeled from the point of impairment. The landuses in this TMDL that are targeted for reductions are significant and anthropogenic sources of sediment to the watershed, thus will not be considered background. They include stream banks, hay/pasture, cropland and unpaved roads.

Recommendations

Sediment reduction in the TMDL is allocated to nonpoint sources in the watershed including: agricultural activities, unpaved roads and stream banks. Implementation of BMPs in these affected areas is called for according to this TMDL document. The proper implementation of these BMPs should achieve the loading reduction goals established in the TMDL.

From an agricultural perspective, reductions in the amount of sediment reaching the streams in the watershed can be made through the right combination of BMPs including, but not limited to: establishment of cover crops, strip cropping, residue management, no till, crop rotation, contour farming, terracing, stabilizing heavy use areas and proper management of storm water. Vegetated or forested buffers are acceptable BMPs to intercept any runoff from farm fields. For the pasturing of farm animals and animal heavy use areas, acceptable BMPs may include: manure storage, rotational grazing, livestock exclusion fencing and forested riparian buffers. Some of these BMPs were observed in the Schwaben Creek Watershed; however, they were more extensively used in the unimpaired reference watershed, Bixler Run, with forested riparian buffers being the predominant BMPs in use. Since both watersheds have a considerable amount of agricultural activities, it is apparent that the greater use of BMPs, especially forested riparian buffers, in the reference watershed has contributed to its ability to maintain its attainment status as a Trout Stocking (TSF) stream.

Stream banks contribute to the sediment load in Schwaben Creek. Stream bank stabilization projects would be acceptable BMPs for the eroded stream banks in the area. However, the establishment of forested riparian buffers is the most economical and effective BMP at providing stream bank stabilization and protection of the banks from freeze/thaw erosion and scouring flows. Forested riparian buffers also provide important natural and durable connectivity of land and water. This

connectivity is necessary to provide cover, nesting and nursery sites, shade and stable temperatures, and viable substrate for aquatic organisms of all layers of the food web.

Important to TMDLs, established forested riparian buffers act as nutrient and sediment sinks. This is because the highly active and concentrated biological communities they maintain will assimilate and remove nutrients and sediment from the water column instead of allowing them to pass downstream unchecked, thus forested riparian buffers work directly toward attaining the goals of the TMDL by reducing pollutant loads. Forested riparian buffers also provide critical habitat to rare and sensitive amphibious and terrestrial organisms as well as migratory species. While forested riparian buffers are considered the most effective BMP, other possibilities for attaining the desired reductions may exist for the agricultural usages, as well as for the stream banks.

For both the agricultural landuses, further ground truthing should be performed in order to assess both the extent of existing BMPs, and to determine the most cost effective and environmentally protective combination of BMPs required for meeting the sediment reductions outlined in this report. A combined effort involving key personnel from the regional DEP office, the County Conservation District, Susquehanna River Basin Commission (SRBC) and other state and local agencies and/or watershed groups would be the most effective in accomplishing any ground truthing exercises. Development of a more detailed watershed implementation plan is recommended.

Public Participation

Public notice of the draft TMDL was published in the *Pennsylvania Bulletin* on June 9, 2012 to foster public comment on the allowable loads calculated.

Literature Cited

Haith, D. A.; Mandel, R.; Wu, R. S. for Cornell University *Generalized Watershed Loading Functions Version 2.0 User's Manual*; Ithaca, NY, 1992.

Evans, B. M.; Lehning, D. W.; Corradini, K. J. for The Pennsylvania State University *AVGWLF Version 7.1 Users Guide*; University Park, PA, 2007.

Attachment A Maps of Schwaben Creek Watershed

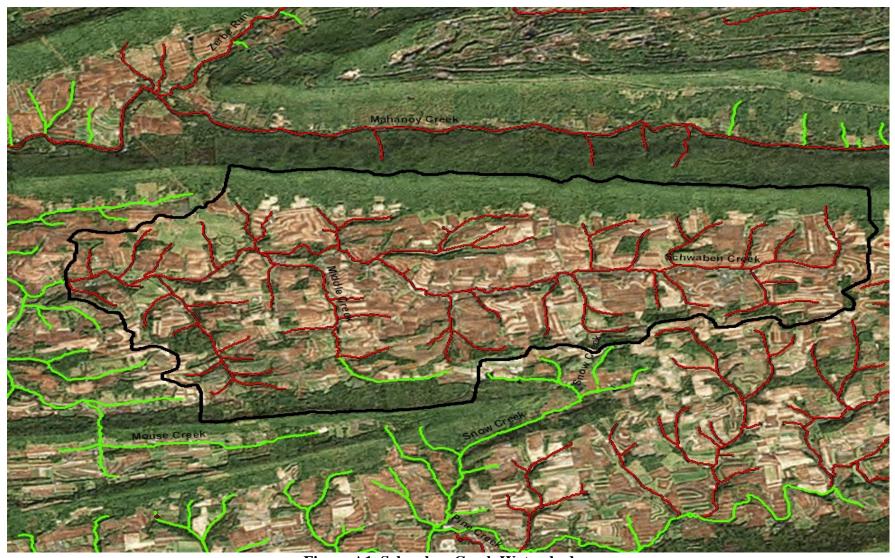


Figure A1. Schwaben Creek Watershed

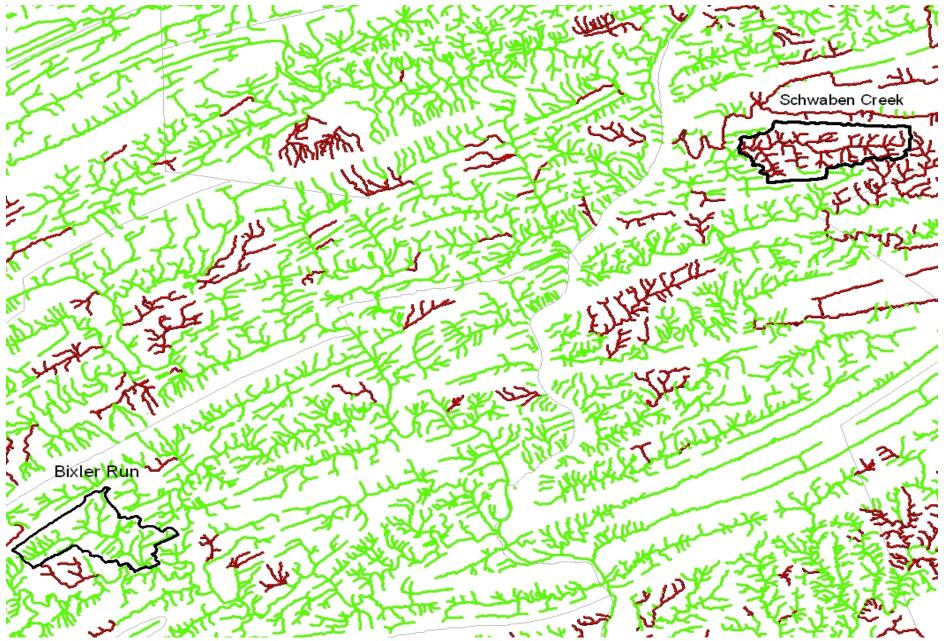


Figure A2. Schwaben Creek Watershed & Reference Watershed (Bixler Run)

Attachment B Equal Marginal Percent Reduction Method

Equal Marginal Percent Reduction (EMPR) (An Allocation Strategy)

The Equal Marginal Percent Reduction (EMPR) allocation method was used to distribute Adjusted Load Allocations (ALAs) between the appropriate contributing nonpoint sources. The load allocation and EMPR procedures were performed using a MS Excel spreadsheet. The 5 major steps identified in the spreadsheet are summarized below:

- **Step 1**: Calculation of the TMDL based on impaired watershed size and unit area loading rate of reference watershed.
- **Step 2**: Calculation of Adjusted Load Allocation based on TMDL, Margin of Safety, and existing loads not reduced.
- **Step 3**: Actual EMPR Process:
 - a. Each land use/source load is compared with the total ALA to determine if any contributor would exceed the ALA by itself. The evaluation is carried out as if each source is the only contributor to the pollutant load of the receiving waterbody. If the contributor exceeds the ALA, that contributor would be reduced to the ALA. If a contributor is less than the ALA, it is set at the existing load. This is the baseline portion of EMPR.
 - b. After any necessary reductions have been made in the baseline, the multiple analyses are run. The multiple analyses will sum all of the baseline loads and compare them to the ALA. If the ALA is exceeded, an equal percent reduction will be made to all contributors' baseline values. After any necessary reductions in the multiple analyses, the final reduction percentage for each contributor can be computed.
- **Step 4**: Calculation of total loading rate of all sources receiving reductions.
- **Step 5**: Summary of existing loads, final load allocations, and % reduction for each pollutant source.

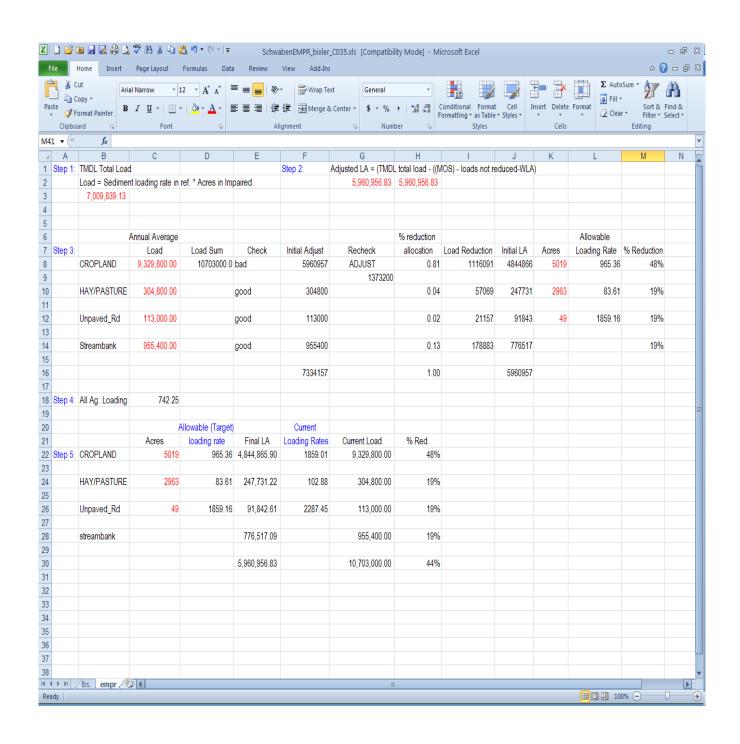


Table B1. Equal Marginal Percent Reduction calculations for the Schwaben Creek Watershed

Attachment C AVGWLF Generated Data Tables

Rural LU	Area (ha)	CN	K	LS	C	Р							
Hay/Past	1199	75	0.237	1.011	0.03	0.45	Month	Ket	Day Hours	Season	Eros Coef		Ground Extract
Cropland	2031	82	0.237	1.566	0.35	0.45				_			
Forest	2408	73	0.223	5.829	0.002	0.52	Jan	0.58	9.4	0	0.12	0	0
Wetland	3	87	0.24	0.245	0.01	0.1	Feb	0.63	10.4	0	0.12	0	0
	0	0	0	0	0	0	Mar	0.66	11.8	0	0.12	0	0
	0	0	0	0	0	0	Apr	0.67	13.2	0	0.3	0	0
	0	0	0	0	0	0	May	0.87	14.4	1	0.3	0	0
	0	0	0	0	0	0	Jun	0.98	14.9	1	0.3	0	0
Bare Land	Area (ha)	CN	K	LS	С	Р	Jul	1.05	14.6	1	0.3	0	0
Unpaved_Rd	20	87	0.231	3.115	0.1	1	Aug	1.09	13.6	1	0.3	0	0
Transition	8	87	0.239	0.463	0.1	0.8	Sep	1.11	12.2	1	0.12	0	0
Urban LU	Area (ha)	CN	K	LS	С	Р	Oct	0.94	10.8	0	0.12	0	0
Lo_Int_Dev	153	83	0.236	0.363	0.08	0.2	Nov	0.84	9.6	0	0.12	0	0
	0	0	0	0	0	0	Dec	0.78	9.1	0	0.12	0	0
nit Unsat Stor	(cm) 10			Initi	al Snow	(cm)				Recess	Coeffic	cient	0.1
Init Sat Stor (c	m) 0			Sed	Deliver	y Ratio (0.134			Seepage	e Coeff	ficient	0
Unsat Avail Wa	at (cm) 14.185	3		Tile	Drain R	atio ().5			Sedimer	t A Fa	ctor 3.0	483E-04
				Tile	Drain D	ensity ()			Sed A A	djustm	ent Facto	or 1
			Loa	d File	Save F	ile E	xport to J	PEG	Clos	е			

Table C1. Data contained in TRANSPRT.DAT for the Schwaben Creek Watershed

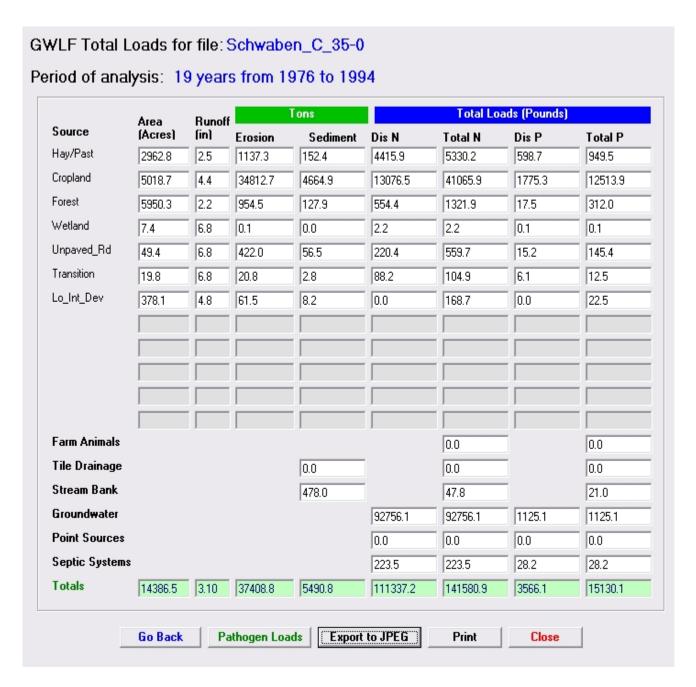


Table C2. Outputs for the Schwaben Creek Watershed

Rural LU	Area (ha)	CN	K	LS	C	Р							
Hay/Past	1233	75	0.244	1.157	0.03	0.45	Month	Ket	Day Hours	Season	Eros Coef		Ground Extract
Cropland	1113	82	0.241	1.136	0.42	0.45		0.00					
Forest	2512	73	0.226	5.096	0.002	0.52	Jan	0.63	9.4	0	0.12	0	0
Wetland	49	87	0.232	0.114	0.01	0.1	Feb	0.69	10.4	0	0.12	0	0
	0	0	0	0	0	0	Mar	0.71	11.8	0	0.12	0	0
	0	0	0	0	0	0	Apr	0.73	13.2	0	0.3	0	0
	0	0	0	0	0	0	May	0.91	14.4	1	0.3	0	0
	0	0	0	0	0	0	Jun	1.01	14.9	1	0.3	0	0
Bare Land	Area (ha)	CN	K	LS	С	Р	Jul	1.07	14.6	1	0.3	0	0
Unpaved_Rd	1	87	0.234	0.691	0.1	1	Aug	1.1	13.6	1	0.3	0	0
Transition	5	87	0.243	0.554	0.1	0.8	Sep	1.12	12.2	1	0.12	0	0
Urban LU	Area (ha)	CN	K	LS	С	Р	Oct	0.97	10.8	0	0.12	0	0
Lo_Int_Dev	196	83	0.232	0.388	0.08	0.2	Nov	0.88	9.6	0	0.12	0	0
	0	0	0	0	0	0	Dec	0.83	9.1	0	0.12	0	0
Init Unsat Stor	(cm) 10			Initi	al Snow	(cm)	0			Recess	Coeffic	eient	0.1
Init Sat Stor (c	m) 0			Sed	Delivery	Ratio	0.14			Seepage	e Coeff	icient	0
Unsat Avail Wa	at (cm) 17.780)5		Tile	Drain R	atio	0.5			Sedimer	ıt A Fa	ctor 4.0	1439E-04
	,			Tile	Drain D	ensity	0			Sed A A	djustm	ent Facto	
			Loa	d File	Save F	ile [Export to J	PEG	Close	<u> </u>			
			LUC	id Tillo	Jutel		Export to a	Lu.	Cita				

Table C3. Data contained in TRANSPRT.DAT for the Bixler Run Watershed

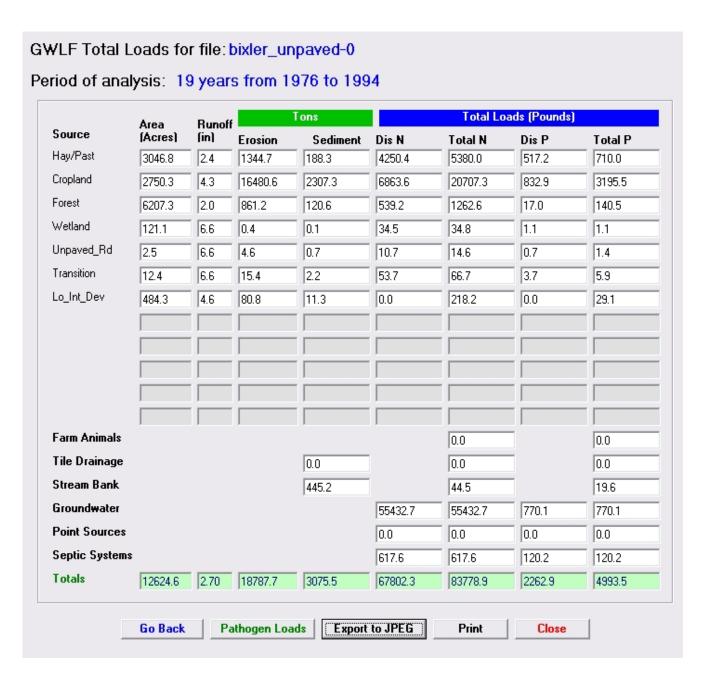


Table C4. Outputs for the Bixler Run Watershed

Stream Name

Source Source	Cause	Date Listed	TMDL Date
Н	lydrologic Unit Code: 02050301 - Lower Su	squehanna-Penns	
Middle Creek HUC: 02050301			
Aquatic Life (849) - 2.19 miles; 5 Agriculture	Segment(s)* Siltation	2002	2015
Middle Creek (Unt 17595) HUC: 02050301			
Aquatic Life (850) - 0.69 miles; 3 Agriculture	Segment(s)* Siltation	2002	2015
Middle Creek (Unt 17596) HUC: 02050301			
Aquatic Life (850) - 0.41 miles; 1 Agriculture	Segment(s)* Siltation	2002	2015
Middle Creek (Unt 17597) HUC: 02050301			
Aquatic Life (850) - 0.62 miles; 1 Agriculture	Segment(s)* Siltation	2002	2015
Middle Creek (Unt 17598) HUC: 02050301			
Aquatic Life (850) - 0.61 miles; 1 Agriculture	Segment(s)* Siltation	2002	2015
Middle Creek (Unt 17599) HUC: 02050301			
Aquatic Life (850) - 0.62 miles; 1 Agriculture	Segment(s)* Siltation	2002	2015
Schwaben Creek HUC: 02050301			
Aquatic Life (1059) - 9.90 miles; : Agriculture	22 Segment(s)* Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
Aquatic Life (16378) - 1.20 miles; Agriculture	5 Segment(s)* Siltation	2002	2015
Schwaben Creek (Unt 17577) HUC: 02050301			
Aquatic Life (1059) - 0.71 miles;	1 Segment(s)*		
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015

 $^{^{*}}$ Segments are defined as individual COM IDs.

Stream Name

Source	Cause	Date Listed	TMDL Date
Schwaben Creek (Unt 17578) HUC: 02050301			
Aquatic Life (1059) - 0.41 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17579) HUC: 02050301			
Aquatic Life (1059) - 0.85 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17580) HUC: 02050301			
Aquatic Life (16378) - 0.12 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17581) HUC: 02050301			
Aquatic Life (1059) - 0.63 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17582) HUC: 02050301			
Aquatic Life (16378) - 2.41 miles; 11 Segment(s)*			
Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17583) HUC: 02050301			
Aquatic Life (16378) - 0.65 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17584) HUC: 02050301			
Aquatic Life (16378) - 0.74 miles; 4 Segment(s)*			
Agriculture	Siltation	2002	2015
<u>Schwaben Creek (Unt 17585)</u> HUC: 02050301			
Aquatic Life (16378) - 0.37 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
<u>Schwaben Creek (Unt 17586)</u> HUC: 02050301			

^{*}Segments are defined as individual COM IDs.

Stream Name

Source	Cause	Date Listed	TMDL Date
Schwaben Creek (Unt 17586) HUC: 02050301			
Aquatic Life (16378) - 0.45 miles; 3 Segment(s)* Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17587) HUC: 02050301			
Aquatic Life (16378) - 0.38 miles; 1 Segment(s)* Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17588) HUC: 02050301			
Aquatic Life (16378) - 0.48 miles; 1 Segment(s)* Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17589) HUC: 02050301			
Aquatic Life (16378) - 0.50 miles; 1 Segment(s)* Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17590) HUC: 02050301			
Aquatic Life (16378) - 0.37 miles; 1 Segment(s)* Agriculture	Siltation	2002	2015
Schwaben Creek (Unt 17591) HUC: 02050301			
Aquatic Life (1059) - 0.75 miles; 1 Segment(s)*			
Agriculture Removal of ∀egetation	Siltation Siltation	2002 2002	2015 2015
Schwaben Creek (Unt 17592) HUC: 02050301			
Aquatic Life (1059) - 0.60 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
Schwaben Creek (Unt 17593) HUC: 02050301			
Aquatic Life (1059) - 0.62 miles; 1 Segment(s)*	O.W. 1.		
Agriculture Removal of ∀egetation	Siltation Siltation	2002 2002	2015 2015
Schwaben Creek (Unt 17600) HUC: 02050301	Siltation	2002	2015

^{*}Segments are defined as individual COM IDs.

Stream Name

Source	Cause	Date Listed	TMDL Date
	123877	W. 2-10	12.500
Schwaben Creek (Unt 17600)			
HUC: 02050301			
Aquatic Life (1059) - 0.64 miles; 3 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17601)</u> HUC: 02050301			
Aquatic Life (1059) - 0.16 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17602) HUC: 02050301			
Aquatic Life (1059) - 0.67 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17603) HUC: 02050301			
Aquatic Life (1059) - 1.91 miles; 4 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17604) HUC: 02050301			
Aquatic Life (1059) - 1.28 miles; 3 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17605) HUC: 02050301			
Aquatic Life (1059) - 0.12 miles; 4 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17606) HUC: 02050301			
Aquatic Life (1059) - 0.49 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17607) HUC: 02050301			
Aquatic Life (1059) - 0.11 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015

 $^{{}^{\}star}\mathsf{Segments}$ are defined as individual COM IDs.

Stream Name

Source	Cause	Date Listed	TMDL Date
Schwaben Creek (Unt 17607)			
HUC: 02050301			
Aquatic Life (1059) - 0.11 miles; 2 Segment(s)*			
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17608)</u> HUC: 02050301			
Aquatic Life (1059) - 1.01 miles; 3 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17609)</u> HUC: 02050301			
Aquatic Life (1059) - 0.37 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17610)</u> HUC: 02050301			
Aquatic Life (1059) - 0.75 miles; 3 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17611)</u> HUC: 02050301			
Aquatic Life (1059) - 0.60 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17612)</u> HUC: 02050301			
Aquatic Life (1059) - 0.93 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17613)</u> HUC: 02050301			
Aquatic Life (16378) - 1.35 miles; 5 Segment(s)*			
Agriculture	Siltation	2002	2015
<u>Schwaben Creek (Unt 17614)</u> HUC: 02050301			
Aquatic Life (16378) - 0.46 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015

^{*}Segments are defined as individual COM IDs.

Stream Name

Use Designation	(Assessment ID)
------------------------	-----------------

Source	Cause	Date Listed	TMDL Date
Schwaben Creek (Unt 17615)			
HUC: 02050301			
Aquatic Life (1059) - 1.09 miles; 2 Segment(s)*	32550 W	2222	
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
Schwaben Creek (Unt 17616) HUC: 02050301			
Aquatic Life (1059) - 0.21 miles; 3 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
<u>Schwaben Creek (Unt 17617)</u> HUC: 02050301			
Aquatic Life (1059) - 0.66 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17618) HUC: 02050301			
Aquatic Life (1059) - 0.57 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17619) HUC: 02050301			
Aquatic Life (1059) - 0.82 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17620) HUC: 02050301			
Aquatic Life (1059) - 0.98 miles; 2 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
Schwaben Creek (Unt 17621) HUC: 02050301			
Aquatic Life (1059) - 0.38 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17622) HUC: 02050301			
Aquatic Life (1059) - 0.75 miles; 1 Segment(s)*			
Agriculture	Siltation	2002	2015

^{*}Segments are defined as individual COM IDs.

Stream Name

Use Designation (Assessment ID)

Source	Cause	Date Listed	TMDL Date
Schwaben Creek (Unt 17622) HUC: 02050301			
Aquatic Life (1059) - 0.75 miles; 1 Segment	(s)*		
Removal of Vegetation	Siltation	2002	2015
Schwaben Creek (Unt 17623) HUC: 02050301			
Aquatic Life (1059) - 1.15 miles; 4 Segment	(s)*		
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17624) HUC: 02050301			
Aquatic Life (1059) - 0.42 miles; 1 Segment	(s)*		
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015
Schwaben Creek (Unt 17625) HUC: 02050301			
Aquatic Life (1059) - 0.52 miles; 2 Segment	(s)*		
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
Schwaben Creek (Unt 17626) HUC: 02050301			
Aquatic Life (1059) - 0.54 miles; 1 Segment	(s)*		
Agriculture	Siltation	2002	2015
Removal of Vegetation	Siltation	2002	2015
zz Unknown NHD Name: 02050301002286 HUC: 02050301			
Aquatic Life (1059) - 0.02 miles; 2 Segment	(s)*		
Agriculture	Siltation	2002	2015
Removal of ∀egetation	Siltation	2002	2015

watershed Summary

Stream Miles

31.61

Assessment Units

1

Watershed Characteristics		48.21	4	135
		Impairment Summary		
Source	Cause	Miles	Assessment Units	Segments (COMIDs)
Agriculture	Siltation	46.22	4	132

^{*}Segments are defined as individual COM IDs.

Siltation

Removal of Vegetation

Segments (COMIDs)

83

Page 7 of 8

Stream Name

Use Designation (Assessment ID)

Source	Cause	Date Listed	TMDL Date
	46.22 **	4**	132 **

^{**}Totals reflect actual miles of impaired stream. Each stream segment may have multiple impairments (different sources or causes contributing to the impairment), so the sum of individual impairment numbers may not add up to the totals shown.

Use Designation Summary

	Miles	Assessment Units	Segments (COMIDs)
Aquatic Life	46.22	4	132

^{*}Segments are defined as individual COM IDs.

Attachment E Excerpts Justifying Changes between the 1998-2002 Section 303(d) Lists and the 2004 to present Integrated Water Quality Monitoring and Assessment Reports

The following are excerpts from the Pennsylvania DEP Section 303(d) narratives that justify changes in listings between the 1996-2002 303(d) Lists and the 2004 to present Integrated Water Quality Monitoring and Assessment Reports. The Section 303(d) listing process has undergone an evolution in Pennsylvania since the development of the 1996 list.

In the 1996 Section 303(d) narrative, strategies were outlined for changes to the listing process. Suggestions included, but were not limited to, a migration to a Global Information System (GIS), improved monitoring and assessment, and greater public input.

The migration to a GIS was implemented prior to the development of the 1998 Section 303(d) list. As a result of additional sampling and the migration to the GIS some of the information appearing on the 1996 list differed from the 1998 list. Most common changes included:

- 1. mileage differences due to recalculation of segment length by the GIS;
- 2. slight changes in source(s)/cause(s) due to new EPA codes;
- 3. changes to source(s)/cause(s), and/or miles due to revised assessments;
- 4. corrections of misnamed streams or streams placed in inappropriate SWP subbasins; and
- 5. unnamed tributaries no longer identified as such and placed under the named watershed listing.

Prior to 1998, segment lengths were computed using a map wheel and calculator. The segment lengths listed on the 1998 Section 303(d) list were calculated automatically by the GIS (ArcInfo) using a constant projection and map units (meters) for each watershed. Segment lengths originally calculated by using a map wheel and those calculated by the GIS did not always match closely. This was the case even when physical identifiers (e.g., tributary confluence and road crossings) matching the original segment descriptions were used to define segments on digital quad maps. This occurred to some extent with all segments, but was most noticeable in segments with the greatest potential for human errors using a map wheel for calculating the original segment lengths (e.g., long stream segments or entire basins).

Migration to National Hydrography Data (NHD)

New to the 2006 report is use of the 1/24,000 National Hydrography Data (NHD) streams GIS layer. Up until 2006 the Department relied upon its own internally developed stream layer. Subsequently, the United States Geologic Survey (USGS) developed 1/24,000 NHD streams layer for the Commonwealth based upon national geodatabase standards. In 2005, DEP contracted with USGS to add missing streams and correct any errors in the NHD. A GIS contractor transferred the old DEP stream assessment information to the improved NHD and the old DEP streams layer was archived. Overall, this marked an improvement in the quality of the streams layer and made the stream assessment data compatible with national standards but it necessitated a change in the Integrated Listing format. The NHD is not attributed with the old DEP five digit stream codes so segments can no longer be listed by stream code but rather only by stream name or a fixed combination of NHD fields known as reachcode and ComID. The NHD is aggregated by Hydrologic Unit Code (HUC) watersheds so HUCs rather than the old State Water Plan (SWP) watersheds are now used to group streams together. A more basic

change was the shift in data management philosophy from one of "dynamic segmentation" to "fixed segments". The dynamic segmentation records were proving too difficult to mange from an historical tracking perspective. The fixed segment methods will remedy that problem. The stream assessment data management has gone through many changes over the years as system requirements and software changed. It is hoped that with the shift to the NHD and OIT's (Office of Information Technology) fulltime staff to manage and maintain SLIMS the systems and formats will now remain stable over many Integrated Listing cycles.

Attachment F Comment and Response

No comments were received during the public comment period.