

**DRAFT**

**BRUSH RUN  
WATERSHED TMDL  
Clarion County**

For Acid Mine Drainage Affected Segments



Prepared by:

Pennsylvania Department of Environmental Protection

November 12, 2008

# DRAFT

## TABLE OF CONTENTS

Introduction.....	3
Directions to the Brush Run Watershed .....	5
Segments addressed in this TMDL.....	5
Clean Water Act Requirements .....	6
Section 303(d) Listing Process .....	7
Basic Steps for Determining a TMDL.....	8
Watershed Background.....	8
AMD Methodology.....	11
TMDL Endpoints.....	13
TMDL Elements (WLA, LA, MOS) .....	14
Allocation Summary .....	14
Recommendations.....	18
Public Participation.....	21
Future TMDL Modifications .....	22
Changes in TMDLs That May Require EPA Approval.....	22
Changes in TMDLs That May Not Require EPA Approval.....	22
Method to Quantify Treatment Pond Pollutant Load .....	30

## TABLES

Table 1. 303(d) Listed Segments .....	3
Table 2. Applicable Water Quality Criteria.....	14
Table 3. Brush Run Watershed Summary Table .....	15

## ATTACHMENTS

<b>Attachment A</b> .....	23
Brush Run Watershed Map .....	23
<b>Attachment B</b> .....	26
Method for Addressing Section 303(d) Listings for pH.....	26
<b>Attachment C</b> .....	29
Method for Calculating Loads from Mine Drainage Treatment Facilities from Surface Mines .....	29
<b>Attachment D</b> .....	34
TMDLs By Segment.....	34
<b>Attachment E</b> .....	51
Excerpts Justifying Changes Between the 1996, 1998, and 2002 Section 303(d) Lists and Integrated Report/List (2004, 2006) .....	51
<b>Attachment F</b> .....	54
Water Quality Data Used In TMDL Calculations .....	54
<b>Attachment G</b> .....	58
TMDLs and NPDES Permitting Coordination.....	58
<b>Attachment H</b> .....	61
Comment and Response .....	61

# DRAFT

## TMDL<sup>1</sup> Brush Run Watershed Clarion County, Pennsylvania

### Introduction

This report presents the Total Maximum Daily Loads (TMDLs) developed for segments in the Brush Run Watershed (Attachment A). These were done to address the impairments noted on the 1996 Pennsylvania Section 303(d) list of impaired waters, required under the Clean Water Act, and covers segments on that list and additional segments on later lists/reports. Brush Run was listed for impairments due to metals, pH and other inorganics. UNT Brush Run 49508 was listed for pH. All impairments resulted from acid drainage from abandoned coalmines. The TMDL addresses the three primary metals associated with acid mine drainage (iron, manganese, aluminum) and pH.

**Table 1. 303(d) Sub-List**

*HUC 05010005; State Water Plan (SWP) Subbasin: 17-B*

Year	Miles	Segment ID	DEP Stream Code	Stream Name	Designated Use	Data Source	Source	EPA 305(b) Cause Code
1996	2.6 2.5 2.5	5378	49502	Brush Run	CWF	303 (d) List	Resource Extraction	*Other Inorganics Metals, pH
1996	1.1	5379	49508	UNT Brush Run	CWF	303 (d) List	Resource Extraction	pH
1998	8.19 1.97	5378 5379	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	*Other Inorganics Metals, pH pH
2000	8.19	5378	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	*Other Inorganics Metals, pH
2000	1.97	5379	49508	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH
2004	8.2	5378	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	*Other Inorganics Metals, pH
2004	0.9	20030508-1430-JJM	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2004	2.0	5379	49508	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH
2004	1.7	20030702-0945-JJM	49513	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH Metals

<sup>1</sup> Pennsylvania's 1996, 1998, and 2002 Section 303(d) lists and the 2004 and 2006 Integrated Water Quality Report were approved by the Environmental Protection Agency (EPA). The 1996 Section 303(d) list provides the basis for measuring progress under the 1997 lawsuit settlement of *American Littoral Society and Public Interest Group of Pennsylvania v. EPA*.

# DRAFT

2004	0.3	20030702 -0945- JJM	49514	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH Metals
2004	2.9	20030508 -1330- JJM	49515	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2004	0.6	20030508 -1330- JJM	49516	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2004	1.4	20030508 -1430- JJM	49518	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.48 7.76	4827 7725	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.4	6265	49503	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2006	1.18	6265	49505	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2006	0.95	6265	49507	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2006	0.58 1.97	4823 7726	49508	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH pH
2006	0.84	4823	49509	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.58 1.12	4823 7726	49511	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH Metals pH
2006	1.69	5193	49513	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.32	5193	49514	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	2.91	4824	49515	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.65	4824	49516	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2006	0.59	4827	49518	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	pH Metals
2008	0.48 7.76	4827 7725	49502	Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Metals pH
2008	0.4	6265	49503	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2008	1.18	6265	49505	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2008	0.95	6265	49507	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH Siltation
2008	0.58 1.97	4823 7726	49508	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH pH
2008	0.84	4823	49509	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH

# DRAFT

2008	0.58 1.12	4823 7726	49511	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2008	1.69	5193	49513	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2008	0.32	5193	49514	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2008	2.91	4824	49515	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2008	0.65	4824	49516	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH
2008	0.59	4827	49518	UNT Brush Run	CWF	SWMP	Abandoned Mine Drainage	Metals pH

\*Other Inorganics listing is not included on 2006 Integrated List.

Cold Water Fish = CWF

Surface Water Monitoring Program = SWMP

See Attachment D, *Excerpts Justifying Changes Between the 1996, 1998, and 2002 Section 303(d) Lists and the 2004 and 2006 Integrated Water Quality Report.*

The use designations for the stream segments in this TMDL can be found in PA Title 25 Chapter 93.

## Directions to the Brush Run Watershed

The Brush Run Watershed is approximately 12.6 square miles in area. It is located in central Clarion County approximately 2.5 miles south of the town of Clarion. Brush Run flows west for approximately 9.5 miles from its headwaters near the town of Strattanville to its confluence with Piney Creek. Brush Run is classified as a Cold Water Fishery (CWF) under Title 25 PA Code Chapter 93, Section 93.9r and can be found on the Clarion and Strattanville 7-1/2 minute quadrangles. Brush Run (stream code – 49502) is part of the Hydrologic Unit Code 05010005 - Clarion River (formerly State Water Plans 17A and 17B).

Brush Run can be accessed by taking exit 62 (Clarion/Route 68) from Interstate 80 (I-80) and traveling South on Rt. 68 for approximately 0.8 miles and turning right onto Piney Road. Travel on Piney Road for approximately 1.9 miles until the road ends. Brush Run flows into Piney Creek approximately 1300 feet downstream from this point (monitoring point BR01).

## Segments addressed in this TMDL

The Brush Run Watershed is affected by pollution from AMD. This pollution has caused elevated levels of metals and depressed pH in the mainstem and tributaries of Brush Run. The sources of the AMD are seeps and discharges from areas disturbed by surface mining. Most of the discharges originate from mining on the Lower Kittanning and Clarion coal seams or refuse piles associated with them. All of the discharges are considered to be nonpoint sources of pollution because they are from abandoned Pre-Act mining operations or from coal companies that have settled their bond forfeitures with the Pennsylvania Department of Environmental Protection (PADEP).

There are currently three surface mining permits issued in the Brush Run watershed. Two of these permits are non-coal mining operations (Neiswonger Construction Inc. SMP#16982801 and Rankin and Sons Excavating Inc. SMP#16010801) that are not required to have Waste Load Allocations (WLAs) assigned to them. Although active coal mining has not been initiated on the remaining surface mining permit (Amerikohl Mining, Inc. SMP#16070101), a WLA will be

# DRAFT

assigned to this permit. All of the discharges in the watershed are from abandoned mines and will be treated as non-point sources. The distinction between non-point and point sources in this case is determined on the basis of whether or not there is a responsible party for the discharge. Where there is no responsible party the discharge is considered to be a non-point source. Each segment on the 303(d) list will be addressed as a separate TMDL. These TMDLs will be expressed as long-term, average loadings. Due to the nature and complexity of mining effects on the watershed, expressing the TMDL as a long-term average gives a better representation of the data used for the calculations.

The use designations for the stream segments in this TMDL can be found in PA Title 25 Chapter 93.

This AMD TMDL document contains future mining Waste Load Allocations (WLA). These WLAs were requested by Knox District Mining Office (DMO) to accommodate one or more future mining operations. This will allow speedier approval of future mining permits without the time consuming process of amending this TMDL document. All comments and questions concerning the future mining WLAs in this TMDL are to be directed to Knox DMO. Future wasteload allocations are calculated using the method described for quantifying pollutant load in Attachment C.

The following are examples of what is or is not intended by the inclusion of future mining WLAs. This list is by way of example and is not intended to be exhaustive or exclusive:

1. The inclusion of one or more future mining WLAs is not intended to exclude the issuance of future non-mining NPDES permits in this watershed or any waters of the Commonwealth.
2. The inclusion of one or more future mining WLAs in specific segments of this watershed is not intended to exclude future mining in any segments of this watershed that does not have a future mining WLA.
3. Each future mining WLA is intended to accommodate one future mining NPDES permit.
4. The inclusion of future mining WLAs does not preclude the amending of this AMD TMDL to accommodate additional NPDES permits.

## **Clean Water Act Requirements**

Section 303(d) of the 1972 Clean Water Act requires states, territories, and authorized tribes to establish water quality standards. The water quality standards identify the uses for each waterbody and the scientific criteria needed to support that use. Uses can include designations for drinking water supply, contact recreation (swimming), and aquatic life support. Minimum goals set by the Clean Water Act require that all waters be “fishable” and “swimmable.”

Additionally, the federal Clean Water Act and the Environmental Protection Agency’s (EPA) implementing regulations (40 CFR Part 130) require:

# DRAFT

- States to develop lists of impaired waters for which current pollution controls are not stringent enough to meet water quality standards (the list is used to determine which streams need TMDLs);
- States to establish priority rankings for waters on the lists based on severity of pollution and the designated use of the waterbody; states must also identify those waters for which TMDLs will be developed and a schedule for development;
- States to submit the list of waters to EPA every two years (April 1 of the even numbered years);
- States to develop TMDLs, specifying a pollutant budget that meets state water quality standards and allocate pollutant loads among pollution sources in a watershed, e.g., point and nonpoint sources; and
- EPA to approve or disapprove state lists and TMDLs within 30 days of final submission.

Despite these requirements, states, territories, authorized tribes, and EPA had not developed many TMDLs. Beginning in 1986, organizations in many states filed lawsuits against the EPA for failing to meet the TMDL requirements contained in the federal Clean Water Act and its implementing regulations. While EPA has entered into consent agreements with the plaintiffs in several states, other lawsuits still are pending across the country.

In the cases that have been settled to date, the consent agreements require EPA to backstop TMDL development, track TMDL development, review state monitoring programs, and fund studies on issues of concern (e.g., AMD, implementation of nonpoint source Best Management Practices (BMPs), etc.).

These TMDLs were developed in partial fulfillment of the 1997 lawsuit settlement of *American Littoral Society and Public Interest Group of Pennsylvania v. EPA*.

## **Section 303(d) Listing Process**

Prior to developing TMDLs for specific waterbodies, there must be sufficient data available to assess which streams are impaired and should be on the Section 303(d) list. With guidance from the EPA, the states have developed methods for assessing the waters within their respective jurisdictions.

The primary method adopted by the Pennsylvania Department of Environmental Protection (DEP) for evaluating waters changed between the publication of the 1996 and 1998 Section 303(d) lists. Prior to 1998, data used to list streams were in a variety of formats, collected under differing protocols. Information also was gathered through the Section 305(b)<sup>2</sup> reporting process. DEP is now using the Statewide Surface Waters Assessment Protocol (SSWAP), a

---

<sup>2</sup> Section 305(b) of the Clean Water Act requires a biannual description of the water quality of the waters of the state.

# DRAFT

modification of the EPA's 1989 Rapid Bioassessment Protocol II (RBP-II), as the primary mechanism to assess Pennsylvania's waters. The SSWAP provides a more consistent approach to assessing Pennsylvania's streams.

The assessment method requires selecting representative stream segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selects as many sites as necessary to establish an accurate assessment for a stream segment; the length of the assessed stream segment can vary between sites. All the biological surveys included kick-screen sampling of benthic macroinvertebrates and habitat evaluations. Benthic macroinvertebrates are identified to the family level in the field.

After the survey is completed, the biologist determines the status of the stream segment. The decision is based on habitat scores and a series of narrative biological statements used to evaluate the benthic macroinvertebrate community. If the stream is determined to be impaired, the source and cause of the impairment is documented. An impaired stream must be listed on the state's Section 303(d) list with the source and cause. A TMDL must be developed for the stream segment and each pollutant. In order for the process to be more effective, adjoining stream segments with the same source and cause listing are addressed collectively, and on a watershed basis.

## **Basic Steps for Determining a TMDL**

Although all watersheds must be handled on a case-by-case basis when developing TMDLs, there are basic processes or steps that apply to all cases. They include:

1. Collection and summarization of pre-existing data (watershed characterization, inventory contaminant sources, determination of pollutant loads, etc.);
2. Calculating the TMDL for the waterbody using EPA approved methods and computer models;
3. Allocating pollutant loads to various sources;
4. Determining critical and seasonal conditions;
5. Public review and comment and comment period on draft TMDL;
6. Submittal of final TMDL; and
7. EPA approval of the TMDL.

## **Watershed Background**

There are limited records available to document mining that occurred prior to the 1970's, sometimes referred to as pre-Act mining (mining that occurred prior to the passage of the Federal Surface Mining Control and Reclamation Act of 1977). Although the date of the earliest mining within this watershed is not known, environmental scars from some of these operations such as unreclaimed pits, spoil piles and post-mining discharges is evidence of a long history of mining and may contribute to the non-point source loading within the Brush Run Watershed.

The majority of the mining within the Brush Run watershed occurred in the 1970's and continues on a smaller scale today. The last application for a permit to mine coal in this watershed was

# DRAFT

issued by the Department of Environmental Protection in 2007. Although the complete files for the older mining permits no longer exist, the following information gathered from microfiche and more recent surface mining permits provides a brief outline of the mining history in the Brush Run watershed:

Company Name	Permit Number	Mine Name	Date Issued	Acreage	Coal Seam(s)	Status
Mayes Coal Company	2766BSM35	1st Ammendment	8/23/1966	420.5	Cl, LK, MK	Reclamation Completed
H&G Coal and Clay Company, Inc.	2766BSM39	H&G #6	9/27/1966	115.0	LK	Reclamation Completed
H&G Coal and Clay Company, Inc.	2766BSM62	H&G #7	11/23/1966	16.0	MK	Reclamation Completed
W.P. Stahlman Coal Company	2766BSM77	Stahlman #20	6/19/1967	213.0	LK, MK	Reclamation Completed
W.P. Stahlman Coal Company	2767BSM12	Stahlman #22	8/25/1967	304.5	MK	Reclamation Completed
John N. Wilson Coal Company	2768BSM15	Port-Eberline	7/27/1968	38.1	LK, LF	Reclamation Completed
Zacheral Coal Company, Inc.	2768BSM24	Zacheral #25	11/8/1968	385.5	C, LK, MK	Reclamation Completed
H&G Coal and Clay Company, Inc.	3671BSM13	H&G #27	9/22/1971	58.0	LK	Reclamation Completed
W&M Coal Company	2769BSM20	Morrison	1/28/1972	51.1	LK, MK	Reclamation Completed
Allan Leadbetter	3671BSM17	Strattanville	1/21/1972	88.0	LK	Bond Forfeited
C&K Coal Company	3671BSM19	C&K #77 Ammended	2/11/1972	623.0	UC, LC	Bond Forfeited - Passive Treatment
John N. Wilson Coal Company	3671BSM16	Port	2/28/1972	14.8	MK	Reclamation Completed
Patrick Carrol	3672SM5	Courson-Schierberl	8/15/1972	50.0	C	Reclamation Completed
Allan Leadbetter	3674SM18	Fye	4/30/1974	70.0	LK	Bond Forfeited
H&G Coal and Clay Company, Inc.	3673SM14	H&G #32	5/22/1974	13.5	LK	Cancelled
Zacheral Coal Company, Inc.	3675SM43	Zacheral #31	2/11/1975	32.5	LK, MK	Reclamation Completed
Zacheral Coal Company, Inc.	3674SM14	Zacheral #29	3/5/1975	281.0	LK, C	Bond Forfeited
H&G Coal and Clay Company, Inc.	3675SM22	H&G #40	9/15/1975	7.5	LK	Reclamation Completed
K.I.T. Industries	3675SM7	Hartman	2/26/1976	62.2	LK, MK	Voided
Terry P. Kiefer	3670BSM10	Morrison	5/3/1976	53.2	LK	Reclamation Completed
MSM Coal Company, Inc.	3675SM78	Mauthe	6/7/1976	33.0	LK	Reclamation Completed
Donald W. Dietz	3675SM25	Dietz #5	6/8/1976	268.0	LF, LC, UC, LK, MK, UK	Bond Forfeited
Beaveridge Coal Company	3674SM48	Beaveridge	7/20/1976	45.0	LK	Reclamation Completed
Chernicky Coal Company, Inc.	3674SM19	1st Ammendment	8/3/1976	146.0	LK	Bond Forfeited
Beaveridge Coal Company	3676SM27	Beaveridge #1	10/19/1976	192.0	LK, MK	Reclamation Completed
K.I.T. Industries	3676SM38	K.I.T. 3A	12/28/1976	22.0	LK	Reclamation Completed
Chernicky Coal Company, Inc.	3676SM43	Chernicky #3	4/7/1977	156.0	Cl, MK, LK	Bond Forfeited

# DRAFT

Clyde Miles Coal Compnay	3677SM2	Kerle	4/7/1977	53.0	LK	Reclamation Completed
K.I.T. Industries	3677SM23	K.I.T. 3	8/8/1977	93.0	LK, MK	Reclamation Completed
Lucinda Coal Company, Inc.	3677SM36	Eberline	1/26/1978	12.5	LK, MK	Voided
Mayes Coal Company	1679646	Mays #1	10/10/1979	15.7	Sandstone	Cancelled
King Coal Company	1679131	King #20		395.8	Cl, BR, LK, MK, UK	Withdrawn
C&K Coal Company	1679132	Stahlman #52	2/25/1980	116.0	LK, MK	Reclamation Completed
Colt Resources Inc.	1679133	Colt #15 Mine	1/11/1980	121.0	Cl	Reclamation Completed
Vendale Coal Company, Inc.	1680108	Dechant		86.8	LK, MK	Withdrawn
C&K Coal Company	16810122	C&K #169	1/13/1982	117.0	UC, LK	Bond Forfeited - Passive Treatment
Clyde Miles Coal Compnay	16800116	Guthrie	2/1/1982	81.0	LK	Reclamation Completed
MSM Coal Company, Inc.	16810110	Mauthe	2/5/1982	90.0	Cl	Reclamation Completed
Laurel Hill Mining	16810103	No. 9 Mine	4/26/1982	57.0	MK, UK	Reclamation Completed
Hepburnia Coal Company	16820108	Buzard		165.0	LK	Returned
Shaffer Mining Company	16820125	Montana	3/9/1984	26.6	LK, MK, UK	Bond Forfeited
Glacial Minerals, Inc.	16830106	Thomas		292.2	UC, LK, MK	Returned
DGB Trucking	16842311	Leadbetter	2/14/1985	3.0	Shale	Bond Forfeited
C&K Coal Company	16753025	Dietz #5	9/27/1985	449.0	LC, UC, LK, MK, UK	Reclamation Completed
TDK Coal Sales	16900109	Dolby	10/2/1990	199.2	MK, UK	Reclamation Completed
Opal Corporation	16920306	Mays	4/17/1993	82.0	Sandstone	Reclamation Completed
Original Fuels Inc.	16950101	Smith	6/28/1995	43.3	LK, MK	Reclamation Completed
Lopa Mining	16960801	Lopa	3/13/1996	23.9	Sandstone	Reclamation Completed
Original Fuels Inc.	16970103	Mays	5/6/1998	104.2	MK	Reclamation Completed
MSM Coal Company, Inc.	16970104	Servy	7/30/1998	97.5	MK	Reclamation Completed
Neiswonger Construction Inc.	16982801	Neiswonger 2	5/6/1998	5.0	Shale	Active
Neiswonger Construction Inc.	16-01-01	Strattanville Reclamation Project	8/27/2001	4.6	LK	Reclamation Completed
Rankin & Sons Excavating Inc.	16010801	Rankin 4 Mine	3/7/2001	3.5	Shale	Active
MSM Coal Company, Inc.	16010102	Port	3/4/2002	23.3	UK	Reclamation Completed
Neiswonger Construction Inc.	16-02-03	Strattanville 3 Reclamation Project	12/17/2002	2.2	LK	Reclamation Completed
Neiswonger Construction Inc.	16-01-02	Strattanville 2 Reclamation Project	2/28/2003	7.3	LK	Reclamation Completed
Neiswonger Construction Inc.	16-03-05	Strattanville 4 Reclamation Project	9/17/2003	15.7	LK	Reclamation Completed

# DRAFT

Neiswonger Construction Inc.	16050108	Wolbert	12/1/2005	58.3	LK	Reclamation Completed
Neiswonger Construction Inc.	16-04-06	Burns Project	2/11/2005	23.3	LK	Reclamation Completed
Amerikohl Mining	16070101	Thomas	11/8/2007	116.0	LF, LK, MK, UK	Issued

In 1975, the Department of Environmental Resources contracted with the Gwin, Dobson and Foreman, Inc., Consulting Engineers to perform an acid mine drainage abatement study on the Piney Creek Watershed, located in eastern central Clarion County under the “Operation Scarlift” land reclamation program. The ensuing report, called the Piney Creek Mine Drainage Pollution Abatement Study, Operation ScarLift Project No. SL-192, established 32 sampling and flow measurement stations in the Piney Creek Watershed in order to determine the extent of pollution due to acid mine drainage and to determine the abatement measures necessary to reduce the pollution load. The recommendations of the report focused on the restoration of seventeen project areas within the Piney Creek Watershed, eight of which were located within the Brush Run Watershed. Recommendations included the sealing of deep mines, reclamation and revegetation of abandoned strip mines, plugging of abandoned flowing oil and gas wells, and better management of tipples within the watershed. The study concluded that Brush Run contributed the greatest pollution load in the entire Piney Creek watershed, accounting roughly 35% of the acid loading at the mouth of Piney Creek. A copy of this report can be found on the Abandoned Mine Reclamation Clearing House Website at the following link:

<http://www.amrclearinghouse.org/Sub/SCARLIFTReports/>

## AMD Methodology

A two-step approach is used for the TMDL analysis of AMD impaired stream segments. The first step uses a statistical method for determining the allowable instream concentration at the point of interest necessary to meet water quality standards. This is done at each point of interest (sample point) in the watershed. The second step is a mass balance of the loads as they pass through the watershed. Loads at these points will be computed based on average annual flow.

The statistical analysis described below can be applied to situations where all of the pollutant loading is from non-point sources as well as those where there are both point and non-point sources. The following defines what are considered point sources and non-point sources for the purposes of our evaluation; point sources are defined as permitted discharges or a discharge that has a responsible party, non-point sources are then any pollution sources that are not point sources. For situations where all of the impact is due to non-point sources, the equations shown below are applied using data for a point in the stream. The load allocation made at that point will be for all of the watershed area that is above that point. For situations where there are point-source impacts alone, or in combination with non-point sources, the evaluation will use the point-source data and perform a mass balance with the receiving water to determine the impact of the point source.

Allowable loads are determined for each point of interest using Monte Carlo simulation. Monte Carlo simulation is an analytical method meant to imitate real-life systems, especially when other analyses are too mathematically complex or too difficult to reproduce. Monte Carlo simulation calculates multiple scenarios of a model by repeatedly sampling values from the probability

# DRAFT

distribution of the uncertain variables and using those values to populate a larger data set. Allocations were applied uniformly for the watershed area specified for each allocation point. For each source and pollutant, it was assumed that the observed data were log-normally distributed. Each pollutant source was evaluated separately using @Risk<sup>3</sup> by performing 5,000 iterations to determine the required percent reduction so that the water quality criteria, as defined in the *Pennsylvania Code. Title 25 Environmental Protection, Department of Environmental Protection, Chapter 93, Water Quality Standards*, will be met instream at least 99 percent of the time. For each iteration, the required percent reduction is:

$$PR = \text{maximum } \{0, (1-Cc/Cd)\} \text{ where} \quad (1)$$

PR = required percent reduction for the current iteration

Cc = criterion in mg/l

Cd = randomly generated pollutant source concentration in mg/l based on the observed data

$$Cd = \text{RiskLognorm}(\text{Mean}, \text{Standard Deviation}) \text{ where} \quad (1a)$$

Mean = average observed concentration

Standard Deviation = standard deviation of observed data

The overall percent reduction required is the 99th percentile value of the probability distribution generated by the 5,000 iterations, so that the allowable long-term average (LTA) concentration is:

$$LTA = \text{Mean} * (1 - PR99) \text{ where} \quad (2)$$

LTA = allowable LTA source concentration in mg/l

Once the allowable concentration and load for each pollutant is determined, mass-balance accounting is performed starting at the top of the watershed and working down in sequence. This mass-balance or load tracking is explained below.

Load tracking through the watershed utilizes the change in measured loads from sample location to sample location, as well as the allowable load that was determined at each point using the @Risk program.

There are two basic rules that are applied in load tracking; rule one is that if the sum of the measured loads that directly affect the downstream sample point is less than the measured load at the downstream sample point it is indicative that there is an increase in load between the points

---

<sup>3</sup>@Risk – Risk Analysis and Simulation Add-in for Microsoft Excel, Palisade Corporation, Newfield, NY, 1990-1997.

# DRAFT

being evaluated, and this amount (the difference between the sum of the upstream and downstream loads) shall be added to the allowable load(s) coming from the upstream points to give a total load that is coming into the downstream point from all sources. The second rule is that if the sum of the measured loads from the upstream points is greater than the measured load at the downstream point this is indicative that there is a loss of instream load between the evaluation points, and the ratio of the decrease shall be applied to the load that is being tracked (allowable load(s)) from the upstream point.

Tracking loads through the watershed gives the best picture of how the pollutants are affecting the watershed based on the information that is available. The analysis is done to insure that water quality standards will be met at all points in the stream. The TMDL must be designed to meet standards at all points in the stream, and in completing the analysis, reductions that must be made to upstream points are considered to be accomplished when evaluating points that are lower in the watershed. Another key point is that the loads are being computed based on average annual flow and should not be taken out of the context for which they are intended, which is to depict how the pollutants affect the watershed and where the sources and sinks are located spatially in the watershed.

For pH TMDLs, acidity is compared to alkalinity as described in Attachment B. Each sample point used in the analysis of pH by this method must have measurements for total alkalinity and hot acidity. Statistical procedures are applied, using the average value for total alkalinity at that point as the target to specify a reduction in the acid concentration. By maintaining a net alkaline stream, the pH value will be in the range between six and eight. This method negates the need to specifically compute the pH value, which for streams affected by low pH from AMD may not be a true reflection of acidity. This method assures that Pennsylvania's standard for pH is met when the acid concentration reduction is met.

Information for the TMDL analysis performed using the methodology described above is contained in the "TMDLs by Segment" section of this report.

## **TMDL Endpoints**

One of the major components of a TMDL is the establishment of an instream numeric endpoint, which is used to evaluate the attainment of applicable water quality. An instream numeric endpoint, therefore, represents the water quality goal that is to be achieved by implementing the load reductions specified in the TMDL. The endpoint allows for a comparison between observed instream conditions and conditions that are expected to restore designated uses. The endpoint is based on either the narrative or numeric criteria available in water quality standards.

Because most of the pollution sources in the watershed are nonpoint sources, the TMDLs' component makeup will be load allocations (LAs) with waste load allocations (WLAs) for permitted discharges. All allocations will be specified as long-term average daily concentrations. These long-term average concentrations are expected to meet water-quality criteria 99% of the time as required in PA Title 25 Chapter 96.3(c). Table 2 shows the water quality criteria for the selected parameters.

# DRAFT

**Table 2      Applicable Water Quality Criteria**

Parameter	<i>Criterion Value (mg/l)</i>	<i>Total Recoverable/Dissolved</i>
Aluminum (Al)	0.75	Total Recoverable
Iron (Fe)	1.50	Total Recoverable
	0.3	Dissolved
Manganese (Mn)	1.00	Total Recoverable
pH *	6.0-9.0	N/A

\*The pH values shown will be used when applicable. In the case of freestone streams with little or no buffering capacity, the TMDL endpoint for pH will be the natural background water quality. These values are typically as low as 5.4 (Pennsylvania Fish and Boat Commission).

## **TMDL Elements (WLA, LA, MOS)**

$$\text{TMDL} = \text{WLA} + \text{LA} + \text{MOS}$$

A TMDL equation consists of a waste load allocation (WLA), load allocation (LA), and a margin of safety (MOS). The waste load allocation is the portion of the load assigned to point sources. The load allocation is the portion of the load assigned to non-point sources. The margin of safety is applied to account for uncertainties in the computational process. The margin of safety may be expressed implicitly (documenting conservative processes in the computations) or explicitly (setting aside a portion of the allowable load). The TMDL allocations in this report are based on available data. Other allocation schemes could also meet the TMDL.

## **Allocation Summary**

These TMDLs will focus remediation efforts on the identified numerical reduction targets for each watershed. The reduction schemes in Table 3 for each segment are based on the assumption that all upstream allocations are implemented and take into account all upstream reductions. Attachment D contains the TMDLs by segment analysis for each allocation point in a detailed discussion. As changes occur in the watershed, the TMDLs may be re-evaluated to reflect current conditions. An implicit MOS based on conservative assumptions in the analysis is included in the TMDL calculations.

The allowable LTA concentration in each segment is calculated using Monte Carlo Simulation as described previously. The allowable load is then determined by multiplying the allowable concentration by the average flow and a conversion factor at each sample point. The allowable load is the TMDL at that point.

Each permitted discharge in a segment is assigned a waste load allocation and the total waste load allocation for each segment is included in this table. Waste load allocations have also been included at some points for future mining operations. The difference between the TMDL and the WLA at each point is the load allocation (LA) at the point. The LA at each point includes all loads entering the segment, including those from upstream allocation points. The percent reduction is calculated to show the amount of load that needs to be reduced from nonpoint sources within a segment in order for water quality standards to be met at the point.

In some instances, instream processes, such as settling, are taking place within a stream segment. These processes are evidenced by a decrease in measured loading between consecutive sample

# DRAFT

points. It is appropriate to account for these losses when tracking upstream loading through a segment. The calculated upstream load lost within a segment is proportional to the difference in the measured loading between the sampling points.

**Table 3. Brush Run Watershed Summary Table**

Parameter	Existing Load (lbs/day)	TMDL Allowable Load (lbs/day)	WLA (lbs/day)	LA (lbs/day)	NPS Load Reduction (lbs/day)	NPS % Reduction
<b>BR10 - HEADWATERS OF BRUSH RUN @ LEDBETTER LANE</b>						
Aluminum (lbs/day)	6.70	0.48	-	0.48	6.22	93%
Iron (lbs/day)	1.18	1.18	-	1.18	0.00	0%
Manganese(lbs/day)	33.26	1.57	-	1.57	31.69	95%
Acidity (lbs/day)	114.07	1.12	-	1.12	112.95	99%
<b>BR09 - UNT 49517 TO BRUSH RUN</b>						
Aluminum (lbs/day)	1.61	0.20	-	0.20	1.41	88%
Iron (lbs/day)	0.54	0.54	-	0.54	0.00	0%
Manganese(lbs/day)	8.03	0.75	-	0.75	7.28	91%
Acidity (lbs/day)	36.06	1.05	-	1.05	35.01	97%
<b>BR08 - BRUSH RUN, DOWNSTREAM BR09 CONFLUENCE</b>						
Aluminum (lbs/day)	9.74	0.69	-	0.69	1.42	67%*
Iron (lbs/day)	2.49	2.20	-	2.20	0.27	11%*
Manganese(lbs/day)	46.78	2.43	-	2.43	5.38	69%*
Acidity (lbs/day)	167.80	3.54	-	3.54	16.30	82%*
<b>BR07 - UNT 49515 TO BRUSH RUN @ REHOBETH CHURCH RD</b>						
Aluminum (lbs/day)	30.62	2.38	1.68	0.70	28.24	92%
Iron (lbs/day)	37.61	10.62	6.75	3.87	26.99	72%
Manganese(lbs/day)	139.38	9.12	4.50	4.62	130.26	93%
Acidity (lbs/day)	548.55	1.77	-	1.77	546.78	99.7%
<b>BR06 - UNT 49513 TO BRUSH RUN</b>						
Aluminum (lbs/day)	2.01	0.72	-	0.72	1.29	64%
Iron (lbs/day)	6.71	0.41	-	0.41	6.30	94%
Manganese(lbs/day)	16.19	0.93	-	0.93	15.26	94%
Acidity (lbs/day)	57.60	0.00	-	0.00	57.60	100%
<b>BR05 - BRUSH RUN MAINSTEM</b>						
Aluminum (lbs/day)	37.53	4.18	2.80	1.38	0.00	0%*
Iron (lbs/day)	106.23	16.87	11.25	5.62	55.78	77%*
Manganese(lbs/day)	238.58	17.97	7.50	10.47	30.74	63%*
Acidity (lbs/day)	868.51	94.29	-	94.29	5.58	6%*
<b>BR04 - UNT 49508 TO BRUSH RUN @ PORT RD</b>						
Aluminum (lbs/day)	7.19	0.67	-	0.67	6.52	91%
Iron (lbs/day)	1.31	1.31	-	1.31	0.00	0%
Manganese(lbs/day)	26.80	2.42	-	2.42	24.38	91%
Acidity (lbs/day)	115.96	8.55	-	8.55	107.41	93%

# DRAFT

Parameter	Existing Load (lbs/day)	TMDL Allowable Load (lbs/day)	WLA (lbs/day)	LA (lbs/day)	NPS Load Reduction (lbs/day)	NPS % Reduction
<b>BR03 - MAINSTEM BRUSH RUN, ALONGSIDE SILVERLING RD</b>						
Aluminum (lbs/day)	49.83	5.66	<i>2.80</i>	2.86	4.30	43%*
Iron (lbs/day)	91.59	19.33	<i>11.25</i>	8.08	0.00	0%*
Manganese(lbs/day)	303.11	25.67	<i>7.50</i>	18.17	32.45	56%*
Acidity (lbs/day)	1053.36	123.14	-	123.14	48.59	28%*
<b>BR02 - MAINSTEM BRUSH RUN, DOWNSTREAM RT 68 BRIDGE</b>						
Aluminum (lbs/day)	47.72	6.20	<i>(0.075) 2.80</i>	3.33	0.00	0%*
Iron (lbs/day)	40.15	14.12	<i>(0.297) 11.25</i>	2.57	0.00	0%*
Manganese(lbs/day)	281.18	24.23	<i>(0.198) 7.50</i>	16.53	0.00	0%*
Acidity (lbs/day)	792.86	90.59	-	90.59	2.10	2%*
<b>BR01 - MOUTH OF BRUSH RUN</b>						
Aluminum (lbs/day)	82.47	9.77	<i>2.24</i>	7.53	31.18	76%*
Iron (lbs/day)	17.10	12.92	<i>9.0</i>	3.92	0.00	0%*
Manganese(lbs/day)	342.24	30.95	<i>6.0</i>	24.95	54.34	64%*
Acidity (lbs/day)	1053.74	106.67	-	106.67	244.80	70%*

\* Takes into account load reductions from upstream sources.  
 Numbers in italics are set aside for future mining operations.


Following is an example of how the allocations, presented in Table 3, for a stream segment are calculated. For this example, aluminum allocations for BR01 of Brush Run are shown. As demonstrated in the example, all upstream contributing loads are accounted for at each point. Attachment D contains the TMDLs by segment analysis for each allocation point in a detailed discussion. These analyses follow the example. Attachment A contains maps of the sampling point locations for reference.

### *Brush Run*

Allocations BR02	
BR02	Al (Lbs/day)
Existing Load @ BR02	47.72
Allowable Load @ BR02	6.20

Load input = 34.75 lbs/day  
 (Difference between existing loads at BR02  
 And BR01)

ALLOCATIONS BR01	
BR01	Al (Lbs/day)
Existing Load @ BR01	82.47
Difference in measured Loads between the loads that enter and existing BR01 ( BR02- BR01)	34.75
Additional load tracked from above samples	6.20
Total load tracked between BR02 and BR01	40.95
Allowable Load @ BR01	9.77
Load Reduction @ BR01	31.18
% Reduction required at BR01	76%

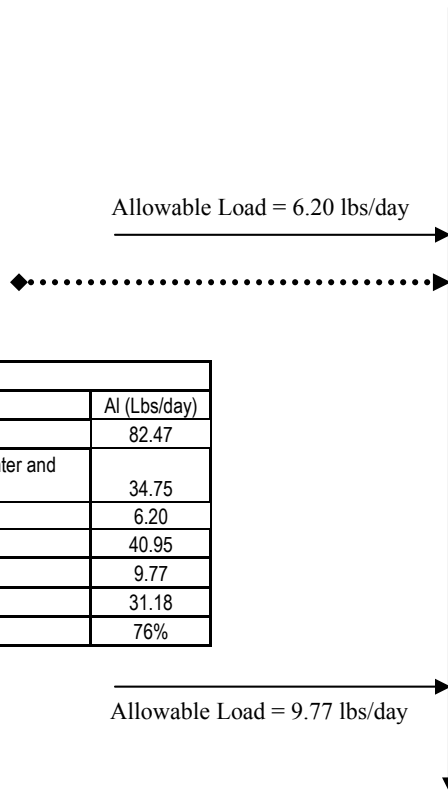

# DRAFT

The allowable aluminum load tracked from BR02 was 6.20 lbs/day. The existing load at BR02 was subtracted from the existing load at BR01 to show the actual measured increase of aluminum load that has entered the stream between this upstream site and BR01 (34.75 lbs/day). This increased value was then added to the calculated allowable load from BR02 to calculate the total load that was tracked between BR02 and BR01 (allowable loads @ BR02 + the difference in existing load between BR02 and BR01). This total load tracked was then subtracted from the calculated allowable load at BR01 to determine the amount of load to be reduced at BR01. This total load value was found to be 40.95 lbs/day; it was 31.18 lbs/day greater than the BR01 allowable load of 9.77 lbs/day. Therefore, a 76% aluminum reduction at BR01 is necessary.

All waste load allocations were calculated using the methodology explained in Method to Quantify Treatment Pond Pollutant Load in the Attachment C section of this report.

Wasteload allocations for the existing mining operations, outfalls TP1, TP3 and TP4, were incorporated into the calculations at BR02 (Amerikohl Mining, Inc. Thomas Mine, NPDES PA0258270). This is the first downstream monitoring point that receives all the potential flow of treated water from any of the treatment sites. No required reductions of these permits are necessary at this time because there are upstream non-point sources that when reduced will meet the TMDL or there is available assimilation capacity. All necessary reductions are assigned to non-point sources.

The Amerikohl Mining, Inc. Mine #230 (SMP#16070101, NPDES#PA0258270) has a non-standard pit size of 200 feet in length and a width of 100 feet. In addition there are two pits of this size. This pit size was used in the Method to Quantify Treatment Pond Pollutant Load calculation example shown below:

$41.4 \text{ in. precip/yr} \times 0.95 \times 1 \text{ ft/12/in.} \times 200' \times 100' \text{/pit} \times 7.48 \text{ gal/ft}^3 \times 1 \text{ yr/365days} \times 1 \text{ day/24hr} \times 1 \text{ hr/60 min} = 0.93 \text{ gal/min}$  average discharge from direct precipitation into the open mining pit area. There are two pits of this size so the total is 1.87 gal/min.

$41.4 \text{ in. precip/yr} \times 3 \text{ pit areas} \times 1 \text{ ft/12/in.} \times 200' \times 100' \text{/pit} \times 7.48 \text{ gal/ft}^3 \times 1 \text{ yr/365days} \times 1 \text{ day/24hr} \times 1 \text{ hr/60 min} \times 15 \text{ in. runoff/100 in. precip} = 0.44 \text{ gal/min}$  average discharge from spoil runoff into the pit area. There are two pits of this size so the total is 0.88 gal/min.

The total average flow to the pit is represented by the sum of the direct pit precipitation and the water flowing to the pit from the spoil area as follows:

$$\text{Total Average Flow} = \text{Direct Pit Precipitation} + \text{Spoil Runoff}$$

$$\text{Total Average Flow} = 1.87 \text{ gal./min.} + 0.88 \text{ gal./min.} = 2.75 \text{ gal./min.}$$

The resulting average load from a permitted treatment pond area as follows.

$$\begin{aligned} &\text{Allowable Aluminum Waste Load Allocation:} \\ &2.75 \text{ gal./min.} \times 0.75 \text{ mg/l} \times 0.01202 = 0.025 \text{ lbs./day} \end{aligned}$$

# DRAFT

Allowable Iron Waste Load Allocation:  
 $2.75 \text{ gal./min.} \times 3 \text{ mg/l} \times 0.01202 = 0.099 \text{ lbs./day}$

Allowable Manganese Waste Load Allocation:  
 $2.75 \text{ gal./min.} \times 2 \text{ mg/l} \times 0.01202 = 0.066 \text{ lbs./day}$

**Table 4. Waste Load Allocation of Permitted Discharges**

Parameter	Allowable Average Monthly Conc. (mg/l)	Calculated Average Flow (MGD)	WLA (lbs/day)
<b>Amerikohl Mining, Inc. Thomas Mine NPDES PA0258270</b>			
<b>TP1</b>			
Al	0.75	0.004	0.025
Fe	3.0	0.004	0.099
Mn	2.0	0.004	0.066
<b>TP3</b>			
Al	0.75	0.004	0.025
Fe	3.0	0.004	0.099
Mn	2.0	0.004	0.066
<b>TP4</b>			
Al	0.75	0.004	0.025
Fe	3.0	0.004	0.099
Mn	2.0	0.004	0.066

## Recommendations

Various methods to eliminate or treat pollutant sources and to provide a reasonable assurance that the proposed TMDLs can be met exist in Pennsylvania. These methods include PADEP's primary efforts to improve water quality through reclamation of abandoned mine lands (for abandoned mining) and through the National Pollution Discharge Elimination System (NPDES) permit program (for active mining). Funding sources available that are currently being used for projects designed to achieve TMDL reductions include the Environmental Protection Agency (EPA) 319 grant program and Pennsylvania's Growing Greener Program. Federal funding is through the Department the Interior, Office of Surface Mining (OSM), for reclamation and mine drainage treatment through the Appalachian Clean Streams Initiative and through Watershed Cooperative Agreements.

OSM reports that nationally, of the \$8.5 billion of high priority (defined as priority 1&2 features or those that threaten public health and safety) coal related AML problems in the AML inventory, \$6.6 billion (78%) have yet to be reclaimed; \$3.6 billion of this total is attributable to Pennsylvania watershed costs. Almost 83 percent of the \$2.3 billion of coal related environmental problems (priority 3) in the AML inventory are not reclaimed.

# DRAFT

The Bureau of Abandoned Mine Reclamation, Pennsylvania's primary bureau in dealing with abandoned mine reclamation (AMR) issues, has established a comprehensive plan for abandoned mine reclamation throughout the Commonwealth to prioritize and guide reclamation efforts for throughout the state to make the best use of valuable funds ([www.dep.state.pa.us/dep/deputate/minres/bamr/complan1.htm](http://www.dep.state.pa.us/dep/deputate/minres/bamr/complan1.htm)). In developing and implementing a comprehensive plan for abandoned mine reclamation, the resources (both human and financial) of the participants must be coordinated to insure cost-effective results. The following set of principles is intended to guide this decision making process:

- Partnerships between the DEP, watershed associations, local governments, environmental groups, other state agencies, federal agencies and other groups organized to reclaim abandoned mine lands are essential to achieving reclamation and abating acid mine drainage in an efficient and effective manner.
- Partnerships between AML interests and active mine operators are important and essential in reclaiming abandoned mine lands.
- Preferential consideration for the development of AML reclamation or AMD abatement projects will be given to watersheds or areas for which there is an approved rehabilitation plan. (guidance is given in Appendix B to the Comprehensive Plan).
- Preferential consideration for the use of designated reclamation moneys will be given to projects that have obtained other sources or means to partially fund the project or to projects that need the funds to match other sources of funds.
- Preferential consideration for the use of available moneys from federal and other sources will be given to projects where there are institutional arrangements for any necessary long-term operation and maintenance costs.
- Preferential consideration for the use of available moneys from federal and other sources will be given to projects that have the greatest worth.
- Preferential consideration for the development of AML projects will be given to AML problems that impact people over those that impact property.
- No plan is an absolute; occasional deviations are to be expected.

A detailed decision framework is included in the plan that outlines the basis for judging projects for funding, giving high priority to those projects whose cost/benefit ratios are most favorable and those in which stakeholder and landowner involvement is high and secure.

In addition to the abandoned mine reclamation program, regulatory programs also are assisting in the reclamation and restoration of Pennsylvania's land and water. PADEP has been effective in implementing the NPDES program for mining operations throughout the Commonwealth. This reclamation was done, through the use of remining permits which have the potential for reclaiming abandoned mine lands, at no cost to the Commonwealth or the federal government.

# DRAFT

Long-term treatment agreements were initialized for facilities/operators who need to assure treatment of post-mining discharges or discharges they degraded which will provide for long-term treatment of discharges. According to OSM, “PADEP is conducting a program where active mining sites are, with very few exceptions, in compliance with the approved regulatory program”.

The Commonwealth is exploring all options to address its abandoned mine problem. During 2000-2006, many new approaches to mine reclamation and mine drainage remediation have been explored and projects funded to address problems in innovative ways. These include:

- Project XL - The Pennsylvania Department of Environmental Protection (“PADEP”), has proposed this XL Project to explore a new approach to encourage the remining and reclamation of abandoned coal mine sites. The approach would be based on compliance with in-stream pollutant concentration limits and implementation of best management practices (“BMPs”), instead of National Pollutant Discharge Elimination System (“NPDES”) numeric effluent limitations measured at individual discharge points. This XL project would provide for a test of this approach in up to eight watersheds with significant acid mine drainage (“AMD”) pollution. The project will collect data to compare in-stream pollutant concentrations versus the loading from individual discharge points and provide for the evaluation of the performance of BMPs and this alternate strategy in PADEP’s efforts to address AMD.
- Awards of grants for 1) proposals with economic development or industrial application as their primary goal and which rely on recycled mine water and/or a site that has been made suitable for the location of a facility through the elimination of existing Priority 1 or 2 hazards, and 2) new and innovative mine drainage treatment technologies that will provide waters of higher purity that may be needed by a particular industry at costs below conventional treatment costs as in common use today or reduce the costs of water treatment below those of conventional lime treatment plants. Eight contracts totaling \$4.075 M were awarded in 2006 under this program.
- Projects using water from mine pools in an innovative fashion, such as the Shannopin Deep Mine Pool (in southwestern Pennsylvania), the Barnes & Tucker Deep Mine Pool (the Susquehanna River Basin Commission into the Upper West Branch Susquehanna River), and the Wadesville Deep Mine Pool (Excelon Generation in Schuylkill County).

There is currently no watershed group focused on the Brush Run Watershed area. It is recommended that agencies work with local interests to form a watershed organization. This watershed organization could then work to implement projects to achieve the reductions recommended in this TMDL document.

Candidate or federally-listed threatened and endangered species may occur in or near the watershed. While implementation of the TMDL should result in improvements to water quality, they could inadvertently destroy habitat for candidate or federally-listed species. TMDL implementation projects should be screened through the Pennsylvania Natural Diversity Inventory (PNDI) early in their planning process, in accordance with the Department's policy titled Policy for Pennsylvania Natural Diversity Inventory (PNDI) Coordination During Permit Review and Evaluation (Document ID# 400-0200-001).

# DRAFT

## **Public Participation**

Public notice of the draft TMDL was published in the *Pennsylvania Bulletin* on November 29, 2008 and the Clarion News on December, 11 2008 to foster public comment on the allowable loads calculated. A public meeting was held on December 16, 2008 beginning at 9:00 am at the Knox District Office, to discuss the proposed TMDL.

# DRAFT

## **Future TMDL Modifications**

In the future, the Department may adjust the load and/or wasteload allocations in this TMDL to account for new information or circumstances that are developed or discovered during the implementation of the TMDL when a review of the new information or circumstances indicate that such adjustments are appropriate. Adjustment between the load and wasteload allocation will only be made following an opportunity for public participation. A wasteload allocation adjustment will be made consistent and simultaneous with associated permit(s) revision(s)/reissuances (i.e., permits for revision/reissuance in association with a TMDL revision will be made available for public comment concurrent with the related TMDLs availability for public comment). New information generated during TMDL implementation may include, among other things, monitoring data, BMP effectiveness information, and land use information. All changes in the TMDL will be tallied and once the total changes exceed 1% of the total original TMDL allowable load, the TMDL will be revised. The adjusted TMDL, including its LAs and WLAs, will be set at a level necessary to implement the applicable WQS and any adjustment increasing a WLA will be supported by reasonable assurance demonstration that load allocations will be met. The Department will notify EPA of any adjustments to the TMDL within 30 days of its adoption and will maintain current tracking mechanisms that contain accurate loading information for TMDL waters.

## **Changes in TMDLs That May Require EPA Approval**

- Increase in total load capacity.
- Transfer of load between point (WLA) and nonpoint (LA) sources.
- Modification of the margin of safety (MOS).
- Change in water quality standards (WQS).
- Non-attainment of WQS with implementation of the TMDL.
- Allocations in trading programs.

## **Changes in TMDLs That May Not Require EPA Approval**


- Total loading shift less than or equal to 1% of the total load.
- Increase of WLA results in greater LA reductions provided reasonable assurance of implementation is demonstrated (a compliance/implementation plan and schedule).
- Changes among WLAs with no other changes; TMDL public notice concurrent with permit public notice.
- Removal of a pollutant source that will not be reallocated.
- Reallocation between LAs.
- Changes in land use.

DRAFT

# **Attachment A**




## **Brush Run Watershed Map**

# DRAFT

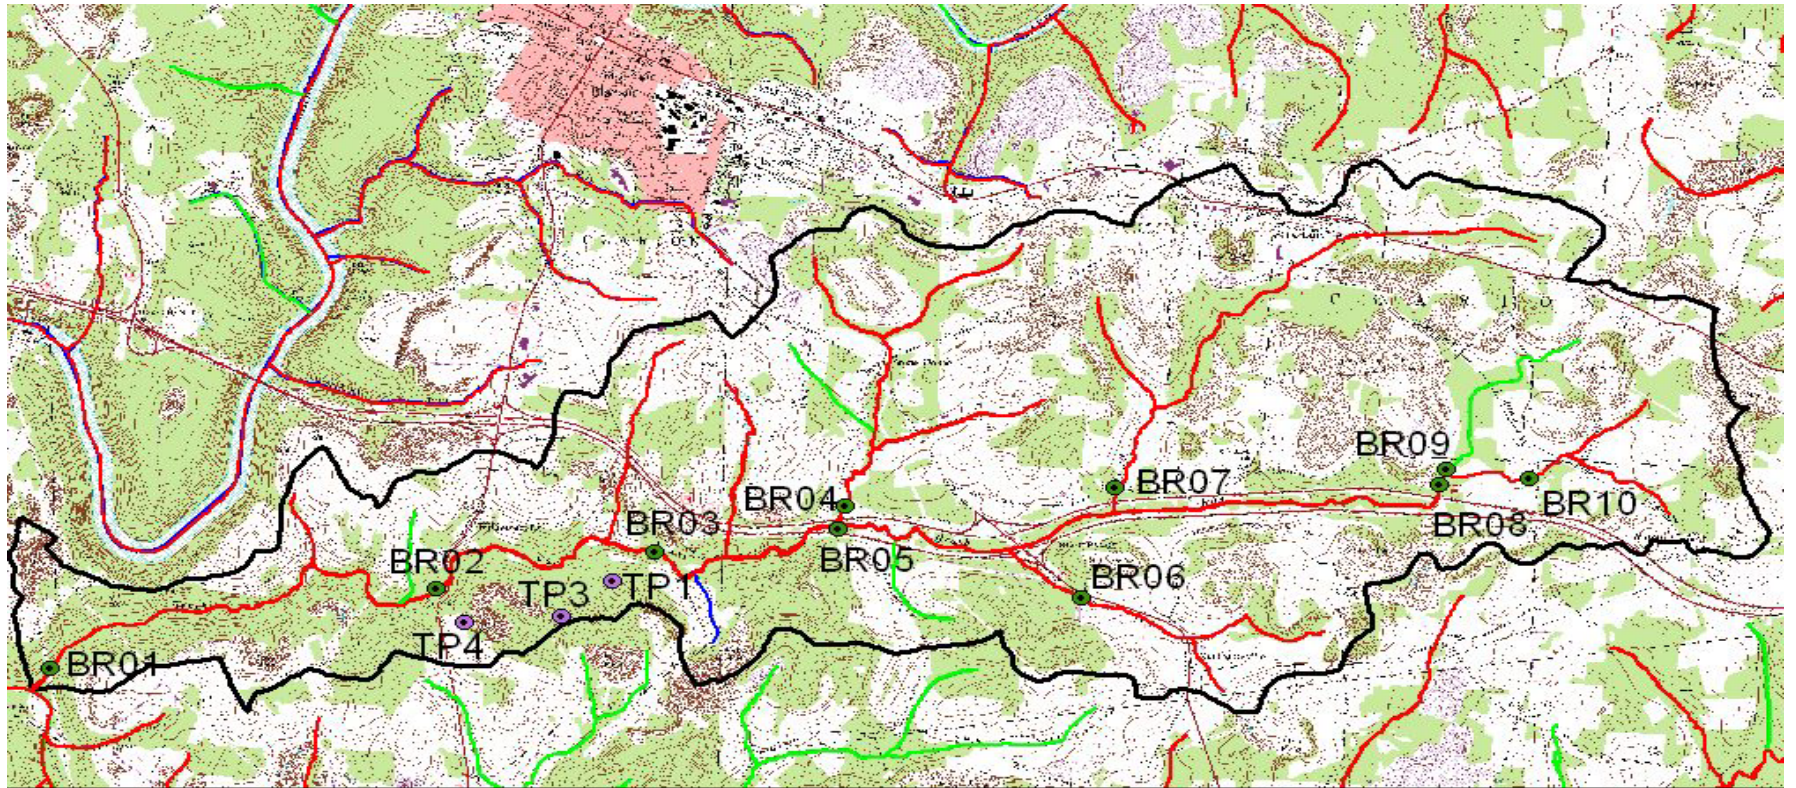


## Brush Run

## Clarion County


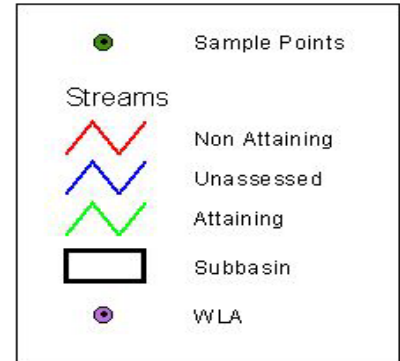
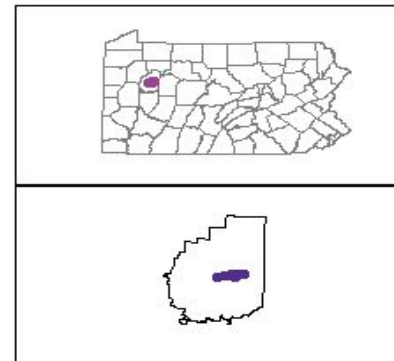



# DRAFT

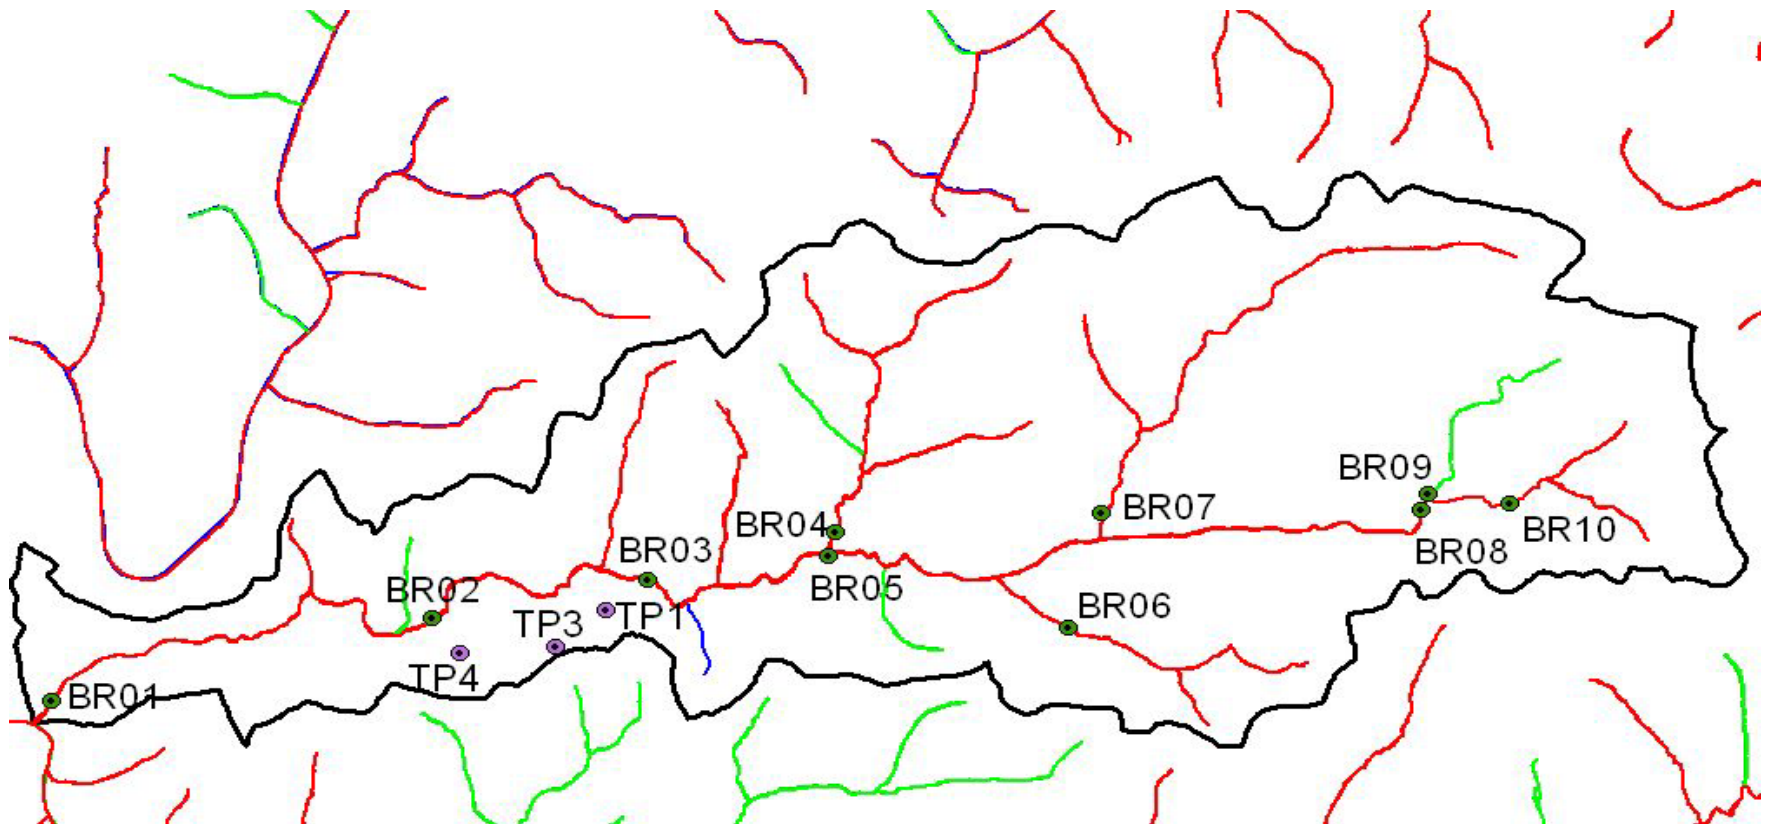

## Brush Run

## Clarion County

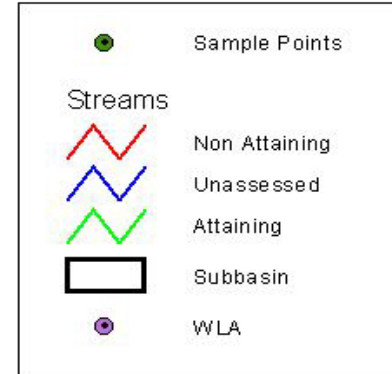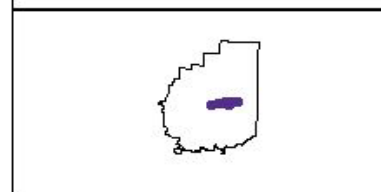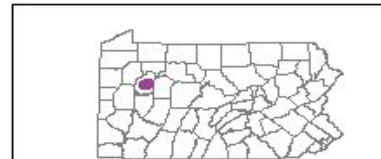

DRAFT

# **Attachment B**

**Method for Addressing Section 303(d) Listings for pH**

# DRAFT

## Method for Addressing Section 303(d) Listings for pH


There has been a great deal of research conducted on the relationship between alkalinity, acidity, and pH. Research published by the Pa. Department of Environmental Protection demonstrates that by plotting net alkalinity (alkalinity-acidity) vs. pH for 794 mine sample points, the resulting pH value from a sample possessing a net alkalinity of zero is approximately equal to six (Figure 1). Where net alkalinity is positive (greater than or equal to zero), the pH range is most commonly six to eight, which is within the USEPA's acceptable range of six to nine and meets Pennsylvania water quality criteria in Chapter 93.

The pH, a measurement of hydrogen ion acidity presented as a negative logarithm, is not conducive to standard statistics. Additionally, pH does not measure latent acidity. For this reason, and based on the above information, Pennsylvania is using the following approach to address the stream impairments noted on the 303(d) list due to pH. The concentration of acidity in a stream is at least partially chemically dependent upon metals. For this reason, it is extremely difficult to predict the exact pH values, which would result from treatment of abandoned mine drainage. When acidity in a stream is neutralized or is restored to natural levels, pH will be acceptable. Therefore, the measured instream alkalinity at the point of evaluation in the stream will serve as the goal for reducing total acidity at that point. The methodology that is applied for alkalinity (and therefore pH) is the same as that used for other parameters such as iron, aluminum, and manganese that have numeric water quality criteria.

Each sample point used in the analysis of pH by this method must have measurements for total alkalinity and total acidity. The same statistical procedures that have been described for use in the evaluation of the metals is applied, using the average value for total alkalinity at that point as the target to specify a reduction in the acid concentration. By maintaining a net alkaline stream, the pH value will be in the range between six and eight. This method negates the need to specifically compute the pH value, which for mine waters is not a true reflection of acidity. This method assures that Pennsylvania's standard for pH is met when the acid concentration reduction is met.

Reference: *Rose, Arthur W. and Charles A. Cravotta, III 1998. Geochemistry of Coal Mine Drainage. Chapter 1 in Coal Mine Drainage Prediction and Pollution Prevention in Pennsylvania. Pa. Dept. of Environmental Protection, Harrisburg, Pa.*

# DRAFT

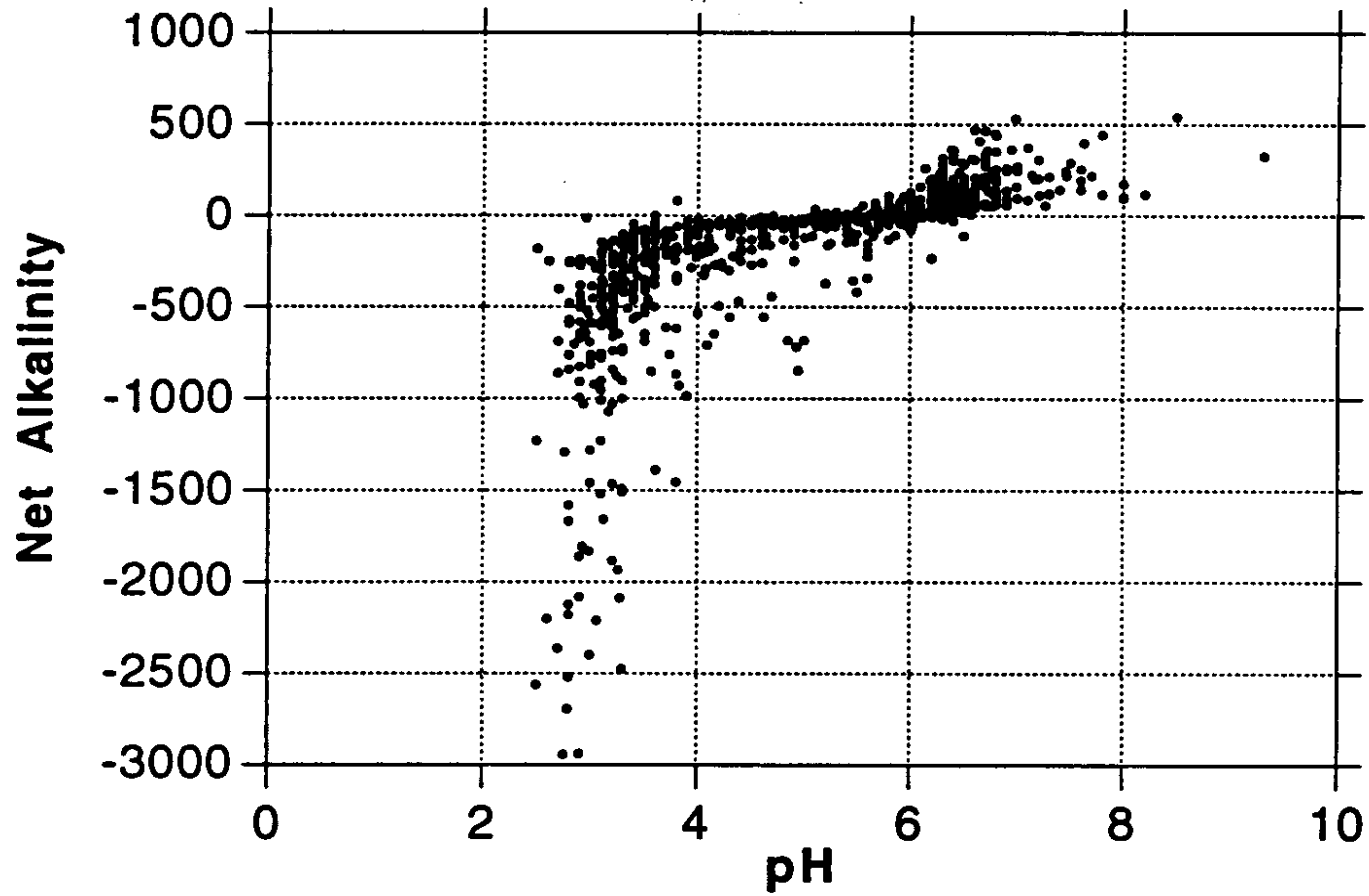

**Figure 1.** Net Alkalinity vs. pH. Taken from Figure 1.2 Graph C, pages 1-5, of Coal Mine Drainage Prediction and Pollution Prevention in Pennsylvania

DRAFT

# **Attachment C**

**Method for Calculating Loads from Mine Drainage Treatment Facilities  
from Surface Mines**

# DRAFT

## *Method to Quantify Treatment Pond Pollutant Load*

Calculating Waste Load Allocations for Active Mining in the TMDL Stream Segment.

The end product of the TMDL report is to develop Waste Load Allocations (WLA) and Load Allocations (LA) that represent the amount of pollution the stream can assimilate while still achieving in-stream limits. The LA is the load from abandoned mine lands where there is no NPDES permit or responsible party. The WLA is the pollution load from active mining that is permitted through NPDES.

In preparing the TMDL, calculations are done to determine the allowable load. The actual load measured in the stream is equal to the allowable load plus the reduced load.

$$\text{Total Measured Load} = \text{Allowed Load} + \text{Reduced Load}$$

If there is active mining or anticipated mining in the near future in the watershed, the allowed load must include both a WLA and a LA component.

$$\text{Allowed Load (lbs/day)} = \text{WLA (lbs/day)} + \text{LA (lbs/day)}$$

The following is an explanation of the quantification of the potential pollution load reporting to the stream from permitted pit water treatment ponds that discharge water at established effluent limits.

Surface coalmines remove soil and overburden materials to expose the underground coal seams for removal. After removal of the coal the overburden is replaced as mine spoil and the soil is replaced for revegetation. In a typical surface mining operation the overburden materials is removed and placed in the previous cut where the coal has been removed. In this fashion, an active mining operation has a pit that progresses through the mining site during the life of the mine. The pit may have water reporting to it, as it is a low spot in the local area. Pit water can be the result of limited shallow groundwater seepage, direct precipitation into the pit, and surface runoff from partially regarded areas that have been backfilled but not yet revegetated. Pit water is pumped to nearby treatment ponds where it is treated to the required treatment pond effluent limits. The standard effluent limits are as follows, although stricter effluent limits may be applied to a mining permit's effluent limits to insure that the discharge of treated water does not cause in-stream limits to be exceeded.

### Standard Treatment Pond Effluent Limits:

Alkalinity > Acidity

6.0 ≤ pH ≤ 9.0

Fe < 3.0 mg/l

Mn < 2.0 mg/l

Discharge from treatment ponds on a mine site is intermittent and often varies as a result of precipitation events. Measured flow rates are almost never available. If accurate flow data are available, they can be used to quantify the WLA. The following is an approach that can be used to determine a waste load allocation for an active mining operation when treatment pond flow rates are

# DRAFT

not available. The methodology involves quantifying the hydrology of the portion of a surface mine site that contributes flow to the pit and then calculating waste load allocation using NPDES treatment pond effluent limits.

The total water volume reporting to ponds for treatment can come from two primary sources: direct precipitation to the pit and runoff from the ungraded area following the pit's progression through the site. Groundwater seepage reporting to the pit is considered negligible compared to the flow rates resulting from precipitation.

In an active mining scenario, a mine operator pumps pit water to the ponds for chemical treatment. Pit water is often acidic with dissolved metals in nature. At the treatment ponds, alkaline chemicals are added to increase the pH and encourage dissolved metals to precipitate and settle. Pennsylvania averages 41.4 inches of precipitation per year (Mid-Atlantic River Forecast Center, National Weather Service, State College, PA, 1961-1990, <http://www.dep.state.pa.us/dep/subject/hotopics/drought/PrecipNorm.htm>). A maximum pit dimension without special permit approval is 1500 feet long by 300 feet wide. Assuming that 5 percent of the precipitation evaporates and the remaining 95 percent flows to the low spot in the active pit to be pumped to the treatment ponds, results in the following equation and average flow rates for the pit area.

$$41.4 \text{ in. precip./yr} \times 0.95 \times 1 \text{ ft./12/in.} \times 1500' \times 300' / \text{pit} \times 7.48 \text{ gal/ft}^3 \times 1 \text{ yr}/365 \text{ days} \times 1 \text{ day}/24 \text{ hr.} \times 1 \text{ hr.}/60 \text{ min.} =$$
$$= 21.0 \text{ gal/min average discharge from direct precipitation into the open mining pit area.}$$

Pit water can also result from runoff from the ungraded and revegetated area following the pit. In the case of roughly backfilled and highly porous spoil, there is very little surface runoff. It is estimated that 80 percent of precipitation on the roughly regarded mine spoil infiltrates, 5 percent evaporates, and 15 percent may run off to the pit for pumping and potential treatment (Jay Hawkins, Office of Surface Mining, Department of the Interior, Personal Communications 2003). Regrading and revegetation of the mine spoil is conducted as the mining progresses. DEP encourages concurrent backfilling and revegetation through its compliance efforts and it is in the interest of the mining operator to minimize the company's reclamation bond liability by keeping the site reclaimed and revegetated. Experience has shown that reclamation and revegetation is accomplished two to three pit widths behind the active mining pit area. DEP uses three pit widths as an area representing potential flow to the pit when reviewing the NPDES permit application and calculating effluent limits based on best available treatment technology and insuring that in-stream limits are met. The same approach is used in the following equation, which represents the average flow reporting to the pit from the ungraded and unvegetated spoil area.

$$41.4 \text{ in. precip./yr} \times 3 \text{ pit areas} \times 1 \text{ ft./12/in.} \times 1500' \times 300' / \text{pit} \times 7.48 \text{ gal/ft}^3 \times 1 \text{ yr}/365 \text{ days} \times 1 \text{ day}/24 \text{ hr.} \times 1 \text{ hr.}/60 \text{ min.} \times 15$$
$$\text{in. runoff}/100 \text{ in. precipitation} =$$
$$= 9.9 \text{ gal./min. average discharge from spoil runoff into the pit area.}$$

The total average flow to the pit is represented by the sum of the direct pit precipitation and the water flowing to the pit from the spoil area as follows:

# DRAFT

Total Average Flow = Direct Pit Precipitation + Spoil Runoff

Total Average Flow = 21.0 gal./min + 9.9 gal./min. = 30.9 gal./min.

The resulting average waste load from a permitted treatment pond area is as follows.

Allowable Iron Waste Load Allocation:

$30.9 \text{ gal./min.} \times 3 \text{ mg/l} \times 0.01202 = 1.1 \text{ lbs./day}$

Allowable Manganese Waste Load Allocation:

$30.9 \text{ gal./min.} \times 2 \text{ mg/l} \times 0.01202 = 0.7 \text{ lbs./day}$

Allowable Aluminum Waste Load Allocation:

$30.9 \text{ gal./min.} \times 2 \text{ mg/l} \times 0.01202 = 0.7 \text{ lbs./day}$

(Note: 0.01202 is a conversion factor to convert from a flow rate in gal./min. and a concentration in mg/l to a load in units of lbs./day.)

There is little or no documentation available to quantify the actual amount of water that is typically pumped from active pits to treatment ponds. Experience and observations suggest that the above approach is very conservative and overestimates the quantity of water, creating a large margin of safety in the methodology. County specific precipitation rates can be used in place of the long-term state average rate, although the margin of safety is greater than differences from individual counties. It is common for many mining sites to have very “dry” pits that rarely accumulate water that would require pumping and treatment.

Also, it is the goal of DEP’s permit review process to not issue mining permits that would cause negative impacts to the environment. As a step to insure that a mine site does not produce acid mine drainage, it is common to require the addition of alkaline materials (waste lime, baghouse lime, limestone, etc.) to the backfill spoil materials to neutralize any acid-forming materials that may be present. This practice of ‘alkaline addition’ or the incorporation of naturally occurring alkaline spoil materials (limestone, alkaline shale or other rocks) may produce alkaline pit water with very low metals concentrations that does not require treatment. A comprehensive study in 1999 evaluated mining permits issued since 1987 and found that only 2.2 percent resulted in a post-mining pollution discharge (Evaluation of Mining Permits Resulting in Acid Mine Drainage 1987-1996: A Post Mortem Study, March 1999). As a result of efforts to insure that acid mine drainage is prevented, most mining operations have alkaline pit water that often meets effluent limits and requires little or no treatment.

While most mining operations are permitted and allowed to have a standard, 1500’ x 300’ pit, most are well below that size and have a corresponding decreased flow and load. Where pit dimensions are greater than the standard size or multiple pits are present, the calculations to define the potential pollution load can be adjusted accordingly. Hence, the above calculated Waste Load Allocation is very generous and likely high compared to actual conditions that are generally encountered. A large margin of safety is included in the WLA calculations.

# DRAFT

The allowable load for the stream segment is determined by modeling of flow and water quality data. The allowable load has a potential Waste Load Allocation (WLA) component if there is active mining or anticipated future mining and a Load Allocation (LA). So, the sum of the Load Allocation and the Waste Load Allocation is equal to the allowed load. The WLA is determined by the above calculations and the LA is determined by the difference between the allowed load and the WLA.

$$\text{Allowed Load} = \text{Waste Load Allocation} + \text{Load Allocation}$$

Or

$$\text{Load Allocation} = \text{Allowed Load} - \text{Waste Load Allocation}$$

This is an explanation of the quantification of the potential pollution load reporting to the stream from permitted pit water treatment ponds that discharge water at established effluent limits. This allows for including active mining activities and their associated Waste Load in the TMDL calculations to more accurately represent the watershed pollution sources and the reductions necessary to achieve in-stream limits. When a mining operation is concluded its WLA is available for a different operation. Where there are indications that future mining in a watershed are greater than the current level of mining activity, an additional WLA amount may be included in the allowed load to allow for future mining.

Derivation of the flow used in the future mining WLAs:

$$30.9 \text{ gal/min} \times 2 \text{ (assume two pits)} \times 0.00144 = 0.09 \text{ MGD}$$

DRAFT

**Attachment D**  
**TMDLs By Segment**

# DRAFT

## Brush Run

The TMDL for Brush Run consists of load allocations to six sampling sites on Brush Run (BR10, BR08, BR05, BR03, BR02 and BR01), and four sites on unnamed tributaries to Brush Run (BR09, BR07, BR06 and BR04). Sample data sets were collected in 2007 and 2008. All sample points are shown on the maps included in Attachment A as well as on the loading schematic presented on the following page.

Brush Run is listed on the 1996 PA Section 303(d) list for other inorganics, metals and pH from AMD as being the cause of the degradation to this stream. This TMDL will focus primarily on metal loading to the Brush Run Watershed, acid loading analysis will also be considered. The objective is to reduce acid loading to the stream, which will in turn raise the pH to the desired range (between 6 and 9) 99% of the time. The result of this analysis is an acid loading reduction that equates to meeting standards for pH (see TMDL Endpoint section in the report, Table 2). The method and rationale for addressing pH is contained in Attachment B.


An allowable long-term average in-stream concentration was determined at each sample point for metals and acidity. The analysis is designed to produce an average value that, when met, will be protective of the water-quality criterion for that parameter 99% of the time. An analysis was performed using Monte Carlo simulation to determine the necessary long-term average concentration needed to attain water-quality criteria 99% of the time. The simulation was run assuming the data set was log normally distributed. Using the mean and standard deviation of the data set, 5000 iterations of sampling were completed, and compared against the water-quality criterion for that parameter. For each sampling event a percent reduction was calculated, if necessary, to meet water-quality criteria. A second simulation that multiplied the percent reduction times the sampled value was run to insure that criteria were met 99% of the time. The mean value from this data set represents the long-term average concentration that needs to be met to achieve water-quality standards. Following is an explanation of the TMDL for each allocation point.

# DRAFT

## Brush Run Sampling Station Diagram

Arrows represent direction of flow

Diagram not to scale

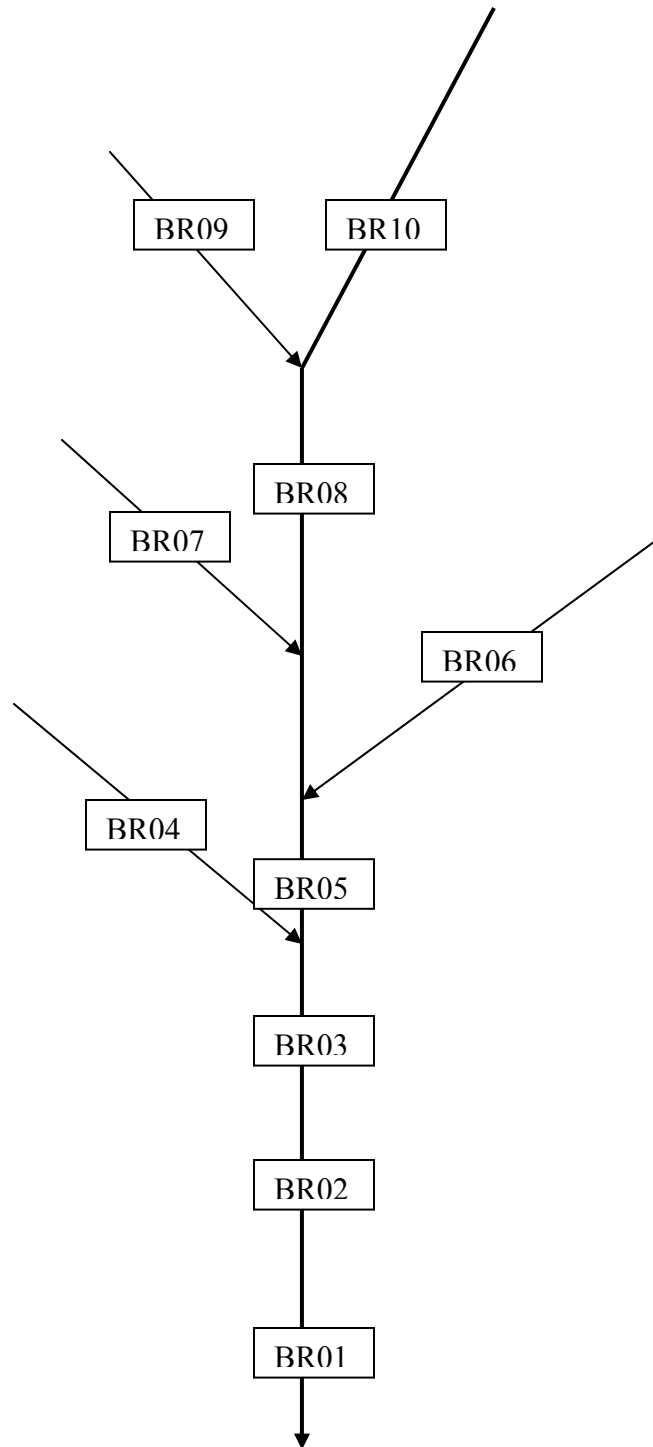

# DRAFT

## TMDL calculations- BR10 –Headwaters of Brush Run @ Ledbetter Lane

The TMDL for sample point BR10 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this headwaters segment of Brush Run was computed using water-quality sample data collected at point BR10. The average flow, measured at the sampling point BR10 (0.23 MGD), is used for these computations. The allowable load allocations calculated at BR10 will directly affect the downstream point BR08.

Sample data at point BR10 shows that the headwaters segment of Brush Run has a pH ranging between 3.9 and 4.0. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore, a TMDL for acidity will be necessary. A TMDL for aluminum, manganese and acidity has been calculated at this site.

Table D1 shows the measured and allowable concentrations and loads at BR10. Table D2 shows the percent reductions for aluminum, manganese and acidity.

Table D1		Measured		Allowable	
Flow (gpm)=	162.50	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	3.44	6.70	0.25	0.48
	Iron	0.60	1.18	0.60	1.18
	Manganese	17.04	33.26	0.80	1.57
	Acidity	58.45	114.07	0.57	1.12
	Alkalinity	1.30	2.54		

Table D2. Allocations BR10			
BR10	Al (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR10	6.70	33.26	114.07
Allowable Load @ BR10	0.48	1.57	1.12
Load Reduction @ BR10	6.22	31.69	112.95
% Reduction required @ BR10	93%	95%	99%

## TMDL calculations- BR09 – UNT 49517 to Brush Run

The TMDL for sample point BR09 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for this headwaters segment of UNT 49517 Brush Run was computed using water-quality sample data collected at point BR09. The average flow, measured at sampling point BR09 (0.13 MGD), is used for these computations. The allowable load allocations calculated at BR09 will directly affect the downstream point BR08.

Sample data at point BR09 shows that the headwaters segment of UNT 49517 Brush Run has a pH ranging between 3.9 and 4.4. There currently is not an entry for this segment on the Pa Section 303(d)

# DRAFT

list for impairment due to pH; but water quality data indicates a TMDL for acidity is necessary. A TMDL for aluminum, manganese and acidity has been calculated at this site.

Table D3 shows the measured and allowable concentrations and loads at BR09. Table D4 shows the percent reduction for aluminum, iron, manganese and acidity needed at BR09.

Table D3	Flow (gpm)=	Measured		Allowable	
		Concentration	Load	Concentration	Load
	89.50	mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.50	1.61	0.19	0.20
	Iron	0.50	0.54	0.50	0.54
	Manganese	7.47	8.03	0.70	0.75
	Acidity	33.55	36.06	0.98	1.05
	Alkalinity	3.15	3.39		

Table D4. Allocations BR09			
BR09	Al (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR09	1.61	8.03	36.06
Allowable Load @ BR09	0.20	0.75	1.05
Load Reduction @ BR09	1.41	7.28	35.01
% Reduction required @ BR09	88%	91%	97%

### TMDL calculations- BR08- Brush Run, Downstream BR09 Confluence

The TMDL for sampling point BR08 consists of a load allocation to all of the area between BR10/BR09 and BR08 shown in Attachment A. The load allocation for this segment of Brush Run was computed using water-quality sample data collected at point BR08. The average flow, measured at the sampling point BR08 (0.40 MGD), is used for these computations.

Sample data at point BR08 shows that this Brush Run segment has a pH ranging between 3.9 and 4.2. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore, a TMDL for acidity is necessary. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D5 shows the measured and allowable concentrations and loads at BR08. Table D6 shows the percent reductions for aluminum, iron, manganese and acidity.

# DRAFT

Table D5	Flow (gpm)=	Measured		Allowable	
		Concentration	Load	Concentration	Load
	280.00	Mg/L	lbs/day	mg/L	lbs/day
	Aluminum	2.90	9.74	0.20	0.69
	Iron	0.74	2.49	0.65	2.20
	Manganese	13.91	46.78	0.72	2.43
	Acidity	49.90	167.80	1.05	3.54
	Alkalinity	2.50	8.41		

The measured and allowable loading for point BR08 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from point BR10 and BR09 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points BR10/BR09 and BR08 to determine a total load tracked for the segment of stream between BR10/BR09 and BR08. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at BR08.

Table D6. Allocations BR08				
BR08	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR08	9.74	2.49	46.78	167.80
Difference in measured Loads between the loads that enter and existing BR08	1.43	0.77	5.49	17.67
Additional load tracked from above samples	0.68	1.72	2.32	2.17
Total load tracked between BR10/BR09 and BR08	2.11	2.49	7.81	19.84
Allowable Load @ BR08	0.69	2.20	2.43	3.54
Load Reduction @ BR08	1.42	0.29	5.38	16.30
% Reduction required @ BR08	67%	12%	69%	82%

### TMDL calculations- BR07 – UNT 49515 to Brush Run

The TMDL for sample point BR07 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for UNT 49515 Brush Run was computed using water-quality sample data collected at point BR07. The average flow, measured at sampling point BR07 (1.24 MGD), is used for these computations. The allowable load allocations calculated at BR07 will directly affect the downstream point BR05.

Sample data at point BR07 shows that this segment of UNT 49515 Brush Run has a pH ranging between 3.7 and 3.9. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity is necessary. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D7 shows the measured and allowable concentrations and loads at BR07. Table D8 shows the percent reduction for aluminum, iron, manganese and acidity needed at BR07.

# DRAFT

Table D7		Measured		Allowable	
Flow (gpm)=	861.00	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	2.96	30.62	0.23	2.38
	Iron	3.64	37.61	1.03	10.62
	Manganese	13.48	139.38	0.88	9.12
	Acidity	53.05	548.55	0.17	1.77
	Alkalinity	0.35	3.62		

Table D8. Allocations BR07				
BR07	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR07	30.62	37.61	139.38	548.55
Allowable Load @ BR07	2.38	10.62	9.12	1.77
Load Reduction @ BR07	28.24	26.99	130.26	546.78
% Reduction required @ BR07	92%	72%	93%	99.7%

A waste load allocation for future mining was included for this segment of UNT 49515 Brush Run allowing for three operations with two active pits (1500' x 300') to be permitted in the future on this segment (Attachment C for the method used to quantify treatment pond load).

Table D9. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow	Allowable Load
		(MGD)	(lbs/day)
Future Operation 1			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 2			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 3			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5

# DRAFT

## TMDL calculations- BR06 – UNT 49513 to Brush Run

The TMDL for sample point BR06 consists of a load allocation to all of the area at and above this point shown in Attachment A. The load allocation for UNT 49513 Brush Run was computed using water-quality sample data collected at point BR06. The average flow, measured at sampling point BR06 (0.14 MGD), is used for these computations. The allowable load allocations calculated at BR06 will directly affect the downstream point BR05.

Sample data at point BR06 shows that this segment of UNT 49513 Brush Run has a pH ranging between 3.7 and 3.8. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity is necessary. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D10 shows the measured and allowable concentrations and loads at BR06. Table D11 shows the percent reduction for aluminum, iron, manganese and acidity needed at BR06.

Table D10		Measured		Allowable	
Flow (gpm)=	95.25	Concentration	Load	Concentration	Load
		mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.76	2.01	0.63	0.72
	Iron	5.86	6.71	0.36	0.41
	Manganese	14.15	16.19	0.81	0.93
	Acidity	50.35	57.60	0.00	0.00
	Alkalinity	0.00	0.00		

Table D11. Allocations BR06				
BR06	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR06	2.01	6.71	16.19	57.60
Allowable Load @ BR06	0.72	0.41	0.93	0.00
Load Reduction @ BR06	1.29	6.30	15.26	57.60
% Reduction required @ BR06	64%	94%	94%	100%

## TMDL calculations- BR05 –Brush Run Mainstem

The TMDL for sample point BR05 consists of a load allocation to all of the area between BR06/BR07/BR08 and BR05 shown in Attachment A. The load allocation for this segment of Brush Run was computed using water-quality sample data collected at point BR05. The average flow, measured at the sampling point BR05 (2.61 MGD), is used for these computations.

Sample data at point BR05 shows that this segment has a pH ranging between 4.1 and 5.1. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity is necessary. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

# DRAFT

Table D12 shows the measured and allowable concentrations and loads at BR05. Table D13 shows the percent reductions for aluminum, iron, manganese and acidity.

Table D12		Measured		Allowable	
Flow (gpm)=	1814.75	Concentration	Load	Concentration	Load
		Mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.72	37.53	0.19	4.18
	Iron	4.87	106.23	0.77	16.87
	Manganese	10.95	238.58	0.82	17.97
	Acidity	39.85	868.51	4.33	94.29
	Alkalinity	6.55	142.75		

The measured and allowable loading for point BR05 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points BR08/BR07/BR06 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points BR08/BR07/BR06 and BR05 to determine a total load tracked for the segment of stream between BR08/BR07/BR06 and BR05. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at BR05.

Table D13. Allocations BR05				
BR05	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR05	37.53	106.23	238.58	868.51
Difference in measured Loads between the loads that enter and existing BR05	-4.84	59.42	36.23	94.56
Percent loss due calculated at BR05	11.4%	NA	NA	NA
Additional load tracked from above samples	3.79	13.23	12.48	5.31
Percentage of upstream loads that reach the BR05	88.6%	NA	NA	NA
Total load tracked between BR08/BR07/BR06 and BR05	3.36	72.65	48.71	99.87
Allowable Load @ BR05	4.18	16.87	17.97	94.29
Load Reduction @ BR05	-0.82	55.78	30.74	5.58
% Reduction required @ BR05	0%	77%	63%	6%

A waste load allocation for future mining was included for this segment of Brush Run allowing for five operations with two active pits (1500' x 300') to be permitted in the future on this segment (Attachment C for the method used to quantify treatment pond load).

# DRAFT

Table D14. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow	Allowable Load
		(MGD)	(lbs/day)
Future Operation 1			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 2			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 3			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 4			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 5			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5

### TMDL calculations- BR04 – UNT 49508 Brush Run @ Port Road

The TMDL for sample point BR04 consists of a load allocation to this unnamed tributary shown in Attachment A. The load allocation for this segment of UNT Brush Run was computed using water-quality sample data collected at point BR04. The average flow, measured at the sampling point BR04 (0.47 MGD), is used for these computations. The allowable load allocations calculated at BR04 will directly affect the downstream point BR03.

Sample data at point BR04 shows that this UNT Brush Run has a pH ranging between 4.0 and 5.4. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity is necessary. A TMDL for aluminum manganese and acidity has been calculated at this site.

# DRAFT

Table D15 shows the measured and allowable concentrations and loads at BR04. Table D16 shows the percent reductions for aluminum, manganese and acidity.

Table D15	Flow (gpm)=	Measured		Allowable	
		Concentration	Load	Concentration	Load
	326.75	mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.83	7.19	0.17	0.67
	Iron	0.33	1.31	0.33	1.31
	Manganese	6.83	26.80	0.62	2.42
	Acidity	29.55	115.96	2.18	8.55
	Alkalinity	6.65	26.10		

Table D16. Allocations BR04			
BR04	Al (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR04	7.19	26.80	115.96
Allowable Load @ BR04	0.67	2.42	8.55
Load Reduction @ BR04	6.52	24.38	107.41
% Reduction required @ BR04	91%	91%	93%

*TMDL calculations- BR03 – Mainstem Brush Run, Alongside Silverling Road*

The TMDL for sample point BR03 consists of a load allocation to all of the area between BR05/BR04 and BR03 shown in Attachment A. The load allocation for this segment of Brush Run was computed using water-quality sample data collected at point BR03. The average flow, measured at the sampling point BR03 (3.42 MGD), is used for these computations.

Sample data at point BR03 shows that this Brush Run segment has a pH ranging between 4.1 and 4.6. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity has been calculated. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D17 shows the measured and allowable concentrations and loads at BR03. Table D18 shows the percent reductions for aluminum, iron, manganese and acidity.

# DRAFT

Table D17		Measured		Allowable	
Flow (gpm)=	2373.75	Concentration	Load	Concentration	Load
		Mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.75	49.83	0.20	5.66
	Iron	3.21	91.59	0.68	19.33
	Manganese	10.63	303.11	0.90	25.67
	Acidity	36.95	1053.36	4.32	123.14
	Alkalinity	5.65	161.07		

The measured and allowable loading for point BR03 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points BR05/BR04 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points BR05/BR04 and BR03 to determine a total load tracked for the segment of stream between BR05/BR04 and BR03. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at BR03.

Table D18. Allocations BR03				
BR03	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR03	49.83	91.59	303.11	1053.36
Difference in measured Loads between the loads that enter and existing BR03	5.11	-15.95	37.73	68.89
Percent loss due calculated at BR03	NA	14.8%	NA	NA
Additional load tracked from above samples	4.85	18.18	20.39	102.84
Percentage of upstream loads that reach the BR03	NA	85.2%	NA	NA
Total load tracked between BR05/BR04 and BR03	9.96	15.48	58.12	171.73
Allowable Load @ BR03	5.66	19.33	25.67	123.14
Load Reduction @ BR03	4.30	-3.85	32.45	48.59
% Reduction required @ BR03	43%	0%	56%	28%

A waste load allocation for future mining was included for this segment of Brush Run allowing for five operations with two active pits (1500' x 300') to be permitted in the future on this segment (Attachment C for the method used to quantify treatment pond load).

Table D19. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow	Allowable Load
		(MGD)	(lbs/day)
Future Operation 1			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25

# DRAFT

Mn	2	0.09	1.5
Future Operation 2			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 3			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 4			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 5			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5

### TMDL calculations- BR02–Mainstem Brush Run, Downstream RT 68 Bridge

The TMDL for sample point BR02 consists of a load allocation to all of the area between BR03 and BR02 shown in Attachment A. The load allocation for this segment of Brush Run was computed using water-quality sample data collected at point BR02. The average flow, measured at the sampling point BR02 (3.67 MGD), is used for these computations.

Sample data at point BR02 shows that this Brush Run segment has a pH ranging between 4.4 and 5.1. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity has been calculated. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

Table D20 shows the measured and allowable concentrations and loads at BR02. Table D21 shows the percent reductions for aluminum, iron, manganese and acidity.

Table D20		Measured		Allowable	
		Concentration	Load	Concentration	Load
Flow (gpm)=	2549.00				
		Mg/L	lbs/day	mg/L	lbs/day
	Aluminum	1.56	47.72	0.20	6.20
	Iron	1.31	40.15	0.46	14.12
	Manganese	9.19	281.18	0.79	24.23
	Acidity	25.90	792.86	2.96	90.59
	Alkalinity	7.35	225.00		

# DRAFT

The measured and allowable loading for point BR02 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points BR03 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points BR03 and BR02 to determine a total load tracked for the segment of stream between BR03 and BR02. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at BR02.

Table D21. Allocations BR02				
BR02	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR02	47.72	40.15	281.18	792.86
Difference in measured Loads between the loads that enter and existing BR02	-2.11	-51.44	-21.93	-260.50
Percent loss due calculated at BR02	4.2%	56.2%	7.2%	24.7%
Additional load tracked from above samples	5.66	19.33	25.67	123.14
Percentage of upstream loads that reach the BR02	95.8%	43.8%	92.8%	75.3%
Total load tracked between BR03 and BR02	5.42	8.47	23.81	92.69
Allowable Load @ BR02	6.20	14.12	24.23	90.59
Load Reduction @ BR02	-0.78	-5.65	-0.42	2.10
% Reduction required @ BR02	0%	0%	0%	2%

A waste load allocation for future mining was included for this segment of Brush Run allowing for five operations with two active pits (1500' x 300') to be permitted in the future on this segment (Attachment C for the method used to quantify treatment pond load).

Table D22. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow	Allowable Load
		(MGD)	(lbs/day)
Future Operation 1			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 2			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 3			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future			

# DRAFT

Operation 4			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 5			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5

## ***Waste Load Allocations– Permitted Discharges***

The Amerikohl Mining, Inc., Thomas Mine (permit SMP 16070101), has three permitted treatment ponds, TP1, TP3 and TP4, that discharges to Brush Run. The waste load allocation for the discharges are calculated with average monthly permit limits and average flow, which is estimated with permitted pit areas and average rainfall. The flow was calculated using a pit size of 200' x 100'.

Table D23. Waste Load Allocation of Permitted Discharges			
Parameter	Allowable Average Monthly Conc. (mg/l)	Calculated Average Flow (MGD)	WLA (lbs/day)
Amerikohl Mining, Inc. Thomas Mine NPDES PA0258270			
TP1			
Al	0.75	0.004	0.025
Fe	3	0.004	0.099
Mn	2	0.004	0.066
TP3			
Al	0.75	0.004	0.025
Fe	3	0.004	0.099
Mn	2	0.004	0.066
TP4			
Al	0.75	0.004	0.025
Fe	3	0.004	0.099
Mn	2	0.004	0.066

## ***TMDL calculations- BR01 – Mouth of Brush Run***

The TMDL for sample point BR01 consists of a load allocation to all of the area between BR02 and BR01 shown in Attachment A. The load allocation for this segment of Brush Run was computed using water-quality sample data collected at point BR01. The average flow, measured at the sampling point BR01 (4.43 MGD), is used for these computations.

Sample data at point BR01 shows that this Brush Run segment has a pH ranging between 4.2 and 4.5. There currently is an entry for this segment on the Pa Section 303(d) list for impairment due to pH; therefore a TMDL for acidity has been calculated. A TMDL for aluminum, iron, manganese and acidity has been calculated at this site.

# DRAFT

Table D24 shows the measured and allowable concentrations and loads at BR01. Table D25 shows the percent reductions for aluminum, iron, manganese and acidity.

Table D24		Measured		Allowable	
Flow (gpm)=	3073.25	Concentration	Load	Concentration	Load
		Mg/L	lbs/day	mg/L	lbs/day
	Aluminum	2.23	82.47	0.26	9.77
	Iron	0.46	17.10	0.35	12.92
	Manganese	9.27	342.24	0.84	30.95
	Acidity	28.55	1053.74	2.89	106.67
	Alkalinity	5.95	219.61		

The measured and allowable loading for point BR01 for aluminum, iron, manganese and acidity was computed using water-quality sample data collected at the point. This was based on the sample data for the point and did not account for any loads already specified from upstream sources. The additional load from points BR02 shows the total load that was permitted from upstream sources. This value was added to the difference in existing loads between points BR02 and BR01 to determine a total load tracked for the segment of stream between BR02 and BR01. This load will be compared to the allowable load to determine if further reductions are needed to meet the calculated TMDL at BR01.

Table D25. Allocations BR01				
BR01	Al (Lbs/day)	Fe (Lbs/day)	Mn (Lbs/day)	Acidity (Lbs/day)
Existing Load @ BR01	82.47	17.10	342.24	1053.74
Difference in measured Loads between the loads that enter and existing BR01	34.75	-23.05	61.06	260.88
Percent loss due calculated at BR01	NA	57.4%	NA	NA
Additional load tracked from above samples	6.20	14.12	24.23	90.59
Percentage of upstream loads that reach the BR01	NA	42.6%	NA	NA
Total load tracked between BR02 and BR01	40.95	6.01	85.29	351.47
Allowable Load @ BR01	9.77	12.92	30.95	106.67
Load Reduction @ BR01	31.18	-6.91	54.34	244.80
% Reduction required @ BR01	76%	0%	64%	70%

A waste load allocation for future mining was included for this segment of Brush Run allowing for four operations with two active pits (1500' x 300') to be permitted in the future on this segment (Attachment C for the method used to quantify treatment pond load).

Table D26. Waste Load Allocations for future mining operations			
Parameter	Monthly Avg. Allowable Conc. (mg/L)	Average Flow	Allowable Load
		(MGD)	(lbs/day)

# DRAFT

Future Operation 1			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 2			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 3			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5
Future Operation 4			
Al	0.75	0.09	0.56
Fe	3	0.09	2.25
Mn	2	0.09	1.5

## ***Margin of Safety***

For this study the margin of safety is applied implicitly. A MOS is implicit because the allowable concentrations and loadings were simulated using Monte Carlo techniques and employing the @Risk software. Other margins of safety used for this TMDL analysis include the following:

- Effluent variability plays a major role in determining the average value that will meet water-quality criteria over the long-term. The value that provides this variability in our analysis is the standard deviation of the dataset. The simulation results are based on this variability and the existing stream conditions (an uncontrolled system). The general assumption can be made that a controlled system (one that is controlling and stabilizing the pollution load) would be less variable than an uncontrolled system. This implicitly builds in a margin of safety.
- An additional MOS is provided because that the calculations were done with a daily Fe average instead of the 30-day average.

## ***Seasonal Variation***

Seasonal variation is implicitly accounted for in these TMDLs because the data used represents all seasons.

## ***Critical Conditions***

The reductions specified in this TMDL apply at all flow conditions. A critical flow condition could not be identified from the data used for this analysis.

DRAFT

# **Attachment E**

**Excerpts Justifying Changes Between the 1996, 1998, and 2002 Section 303(d) Lists and Integrated Report/List (2004, 2006)**

# DRAFT

*The following are excerpts from the Pennsylvania DEP Section 303(d) narratives that justify changes in listings between the 1996, 1998, 2002, 2004 and 2006 303(d) Lists and Integrated Report/List (2006). The Section 303(d) listing process has undergone an evolution in Pennsylvania since the development of the 1996 list.*

In the 1996 Section 303(d) narrative, strategies were outlined for changes to the listing process. Suggestions included, but were not limited to, a migration to a Global Information System (GIS), improved monitoring and assessment, and greater public input.

The migration to a GIS was implemented prior to the development of the 1998 Section 303(d) list. As a result of additional sampling and the migration to the GIS some of the information appearing on the 1996 list differed from the 1998 list. Most common changes included:

1. mileage differences due to recalculation of segment length by the GIS;
2. slight changes in source(s)/cause(s) due to new EPA codes;
3. changes to source(s)/cause(s), and/or miles due to revised assessments;
4. corrections of misnamed streams or streams placed in inappropriate SWP subbasins; and
5. unnamed tributaries no longer identified as such and placed under the named watershed listing.

Prior to 1998, segment lengths were computed using a map wheel and calculator. The segment lengths listed on the 1998 Section 303(d) list were calculated automatically by the GIS (ArcInfo) using a constant projection and map units (meters) for each watershed. Segment lengths originally calculated by using a map wheel and those calculated by the GIS did not always match closely. This was the case even when physical identifiers (e.g., tributary confluence and road crossings) matching the original segment descriptions were used to define segments on digital quad maps. This occurred to some extent with all segments, but was most noticeable in segments with the greatest potential for human errors using a map wheel for calculating the original segment lengths (e.g., long stream segments or entire basins).

## Migration to National Hydrography Data (NHD)

New to the 2006 report is use of the 1/24,000 National Hydrography Data (NHD) streams GIS layer. Up until 2006 the Department relied upon its own internally developed stream layer. Subsequently, the United States Geologic Survey (USGS) developed 1/24,000 NHD streams layer for the Commonwealth based upon national geodatabase standards. In 2005, DEP contracted with USGS to add missing streams and correct any errors in the NHD. A GIS contractor transferred the old DEP stream assessment information to the improved NHD and the old DEP streams layer was archived. Overall, this marked an improvement in the quality of the streams layer and made the stream assessment data compatible with national standards but it necessitated a change in the Integrated Listing format. The NHD is not attributed with the old DEP five digit stream codes so segments can no longer be listed by stream code but rather only by stream name or a fixed combination of NHD fields known as reachcode and ComID. The NHD is aggregated by Hydrologic Unit Code (HUC) watersheds so HUCs rather than the old State Water Plan (SWP) watersheds are now used to group streams together. The map in Appendix E illustrates the relationship between the old SWP and new HUC watershed delineations. A more basic change was the shift in data management philosophy from

# DRAFT

one of “dynamic segmentation” to “fixed segments”. The dynamic segmentation records were proving too difficult to manage from an historical tracking perspective. The fixed segment methods will remedy that problem. The stream assessment data management has gone through many changes over the years as system requirements and software changed. It is hoped that with the shift to the NHD and OIT’s (Office of Information Technology) fulltime staff to manage and maintain SLIMS the systems and formats will now remain stable over many Integrated Listing cycles.

DRAFT

# **Attachment F**

*Water Quality Data Used In TMDL Calculations*

# DRAFT

## BR10 HEADWATERS OF BRUSH RUN @ LEDBETTER LANE

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	79.00	4.00	2.00	82.40	0.48	16.50	1.80
4/22/2008	334.00	4.00	1.60	73.80	0.67	17.36	6.24
7/2/2008	98.00	3.90	0.00	44.00	0.68	19.11	3.49
8/12/2008	139.00	3.90	1.60	33.60	0.58	15.21	2.22
<b>AVERAGE</b>	162.50	3.95	1.30	58.45	0.60	17.04	3.44
<b>ST DEV</b>	117.04	0.06	0.89	23.35	0.10	1.64	2.00

## BR09 UNT 49517 TO BRUSH RUN

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	2.00	4.00	2.00	60.60	0.40	7.08	1.22
4/22/2008	177.00	4.40	4.80	36.60	<u>0.25</u>	8.10	3.27
7/2/2008	98.00	3.90	0.00	26.60	0.89	8.74	0.79
8/12/2008	81.00	4.40	5.80	10.40	0.46	5.97	0.71
<b>AVERAGE</b>	89.50	4.18	3.15	33.55	0.50	7.47	1.50
<b>ST DEV</b>	71.78	0.26	2.65	21.02	0.27	1.22	1.20

## BR08 BRUSH RUN, DOWNSTREAM BR09 CONFLUENCE

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	94.00	4.20	4.80	72.40	0.39	14.80	1.75
4/22/2008	542.00	4.10	2.60	62.20	0.61	14.20	5.97
7/2/2008	263.00	3.90	0.00	39.60	1.06	15.65	2.52
8/12/2008	221.00	4.00	2.60	25.40	0.91	11.00	1.35
<b>AVERAGE</b>	280.00	4.05	2.50	49.90	0.74	13.91	2.90
<b>ST DEV</b>	188.87	0.13	1.96	21.32	0.30	2.03	2.10

## BR07 UNT 49515 TO BRUSH RUN @ REHOBETH CHURCH RD

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	420.00	3.80	0.00	72.00	3.07	13.90	1.59
4/22/2008	1810.00	3.90	0.00	62.20	4.36	14.02	5.68
7/2/2008	651.00	3.70	0.00	47.40	3.17	13.59	2.79
8/12/2008	563.00	3.90	1.40	30.60	3.94	12.41	1.79

# DRAFT

<b>AVERAGE</b>	861.00	3.83	0.35	53.05	3.64	13.48	2.96
<b>ST DEV</b>	639.79	0.10	0.70	18.06	0.62	0.74	1.88

## BR06 UNT 49513 TO BRUSH RUN

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	77.00	3.80	0.00	80.80	2.54	13.30	1.89
4/22/2008	222.00	3.70	0.00	41.20	13.14	12.81	1.64
7/2/2004	26.00	3.80	0.00	41.60	4.68	15.39	1.65
8/12/2008	56.00	3.80	0.00	37.80	3.09	15.11	1.85
<b>AVERAGE</b>	95.25	3.78	0.00	50.35	5.86	14.15	1.76
<b>ST DEV</b>	87.05	0.05	0.00	20.37	4.94	1.29	0.13

## BR05 BRUSH RUN MAINSTEM

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	1159.00	5.10	8.40	46.80	6.26	10.90	0.75
4/22/2008	3822.00	4.50	7.20	44.80	6.03	11.80	3.65
7/2/2004	1003.00	4.10	3.80	30.40	4.07	11.42	1.61
8/12/2008	1275.00	4.50	6.80	37.40	3.13	9.67	0.88
<b>AVERAGE</b>	1814.75	4.55	6.55	39.85	4.87	10.95	1.72
<b>ST DEV</b>	1342.80	0.41	1.96	7.49	1.52	0.93	1.34

## BR04 UNT 49508 TO BRUSH RUN @ PORT RD

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	198.00	5.20	8.00	43.80	0.34	5.72	0.82
4/22/2008	720.00	4.00	1.80	43.60	0.69	9.06	4.24
7/2/2008	174.00	4.80	8.20	22.40	<u>0.15</u>	6.32	1.50
8/12/2008	215.00	5.40	8.60	8.40	<u>0.15</u>	6.22	0.78
<b>AVERAGE</b>	326.75	4.85	6.65	29.55	0.33	6.83	1.83
<b>ST DEV</b>	262.71	0.62	3.24	17.31	0.26	1.51	1.64

## BR03 MAINSTEM BRUSH RUN, ALONGSIDE SILVERLING RD

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
----------------	--------------	-------------	----------	------------	---------	---------	---------

# DRAFT

8/30/2007	1441.00	4.60	7.20	35.80	4.14	10.20	0.71
4/22/2008	5097.00	4.30	6.00	41.60	4.42	10.90	3.61
7/2/2008	1204.00	4.10	3.60	31.40	2.16	11.18	1.71
8/12/2008	1753.00	4.30	5.80	39.00	2.13	10.25	0.96
<b>AVERAGE</b>	2373.75	4.33	5.65	36.95	3.21	10.63	1.75
<b>ST DEV</b>	1829.37	0.21	1.50	4.40	1.24	0.49	1.31

**BR02** MAINSTEM BRUSH RUN, DOWNSTREAM RT 68 BRIDGE

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	1612.00	5.10	8.00	38.20	0.94	8.75	0.72
4/22/2008	5307.00	4.40	6.40	33.20	2.55	9.55	3.15
7/2/2008	1454.00	4.40	6.60	18.80	0.95	10.31	1.64
8/12/2008	1823.00	5.00	8.40	13.40	0.81	8.13	0.73
<b>AVERAGE</b>	2549.00	4.73	7.35	25.90	1.31	9.19	1.56
<b>ST DEV</b>	1844.87	0.38	1.00	11.71	0.83	0.95	1.14

**BR01** MOUTH OF BRUSH RUN

Date Collected	Initial Flow	pH pH units	ALK MG/L	HOT A MG/L	FE MG/L	MN MG/L	AL MG/L
8/30/2007	1937.00	4.50	6.20	34.00	<u>0.15</u>	8.52	1.37
4/22/2008	6017.00	4.20	5.00	37.80	1.05	9.45	3.91
7/2/2008	2126.00	4.30	5.80	27.00	0.33	10.18	2.29
8/12/2008	2213.00	4.50	6.80	15.40	0.33	8.94	1.36
<b>AVERAGE</b>	3073.25	4.38	5.95	28.55	0.46	9.27	2.23
<b>ST DEV</b>	1965.88	0.15	0.75	9.84	0.40	0.72	1.20

*Underlined data are included at one half the detection limit.*

DRAFT

# **Attachment G**

*TMDLs and NPDES Permitting Coordination*

# DRAFT

NPDES permitting is unavoidably linked to TMDLs through waste load allocations and their translation, through the permitting program, to effluent limits. Primary responsibility for NPDES permitting rests with the District Mining Offices (for mining NPDES permits) and the Regional Offices (for industrial NPDES permits). Therefore, the DMOs and Regions will maintain tracking mechanisms of available waste load allocations, etc. in their respective offices. The TMDL program will assist in this effort. However, the primary role of the TMDL program is TMDL development and revision/amendment (the necessity for which is as defined in the Future Modifications section) at the request of the respective office. All efforts will be made to coordinate public notice periods for TMDL revisions and permit renewals/reissuances.

## **Load Tracking Mechanisms**

The Department has developed tracking mechanisms that will allow for accounting of pollution loads in TMDL watersheds. This will allow permit writers to have information on how allocations have been distributed throughout the watershed in the watershed of interest while making permitting decisions. These tracking mechanisms will allow the Department to make minor changes in WLAs without the need for EPA to review and approve a revised TMDL. Tracking will also allow for the evaluation of loads at downstream points throughout a watershed to ensure no downstream impairments will result from the addition, modification or movement of a permit.

## **Options for Permittees in TMDL Watersheds**

The Department is working to develop options for mining permits in watersheds with approved TMDLs.

### **Options identified**

- Build excess WLA into the TMDL for anticipated future mining. This could then be used for a new permit. Permittee must show that there has been actual load reduction in the amount of the proposed permit or must include a schedule to guarantee the reductions using current data referenced to the TMDL prior to permit issuance.
- Use WLA that is freed up from another permit in the watershed when that site is reclaimed. If no permits have been recently reclaimed, it may be necessary to delay permit issuance until additional WLA becomes available.
- Re-allocate the WLA(s) of existing permits. WLAs could be reallocated based on actual flows (as opposed to design flows) or smaller than approved pit/spoil areas (as opposed to default areas). The "freed-up" WLA could be applied to the new permit. This option would require the simultaneous amendment of the permits involved in the reallocation.
- Non-discharge alternative.

### **Other possible options**

The following two options have also been identified for use in TMDL watersheds. However, before recommendation for use as viable implementation options, a thorough regulatory (both state and federal) review must be completed. These options should not be implemented until the

# DRAFT

completion of the regulatory review and development of any applicable administrative mechanisms.

- Issue the permit with in-stream water quality criteria values as the effluent limits. The in-stream criteria value would represent the monthly average, with the other limits adjusted accordingly (e.g., for Fe, the limits would be 1.5 mg/L monthly average, 3.0 mg/L daily average and 4.0 instantaneous max mg/L).
- The applicant would agree to treat an existing source (point or non-point) where there is no responsible party and receive a WLA based on a portion of the load reduction to be achieved. The result of using these types of offsets in permitting is a net improvement in long-term water quality through the reclamation or treatment of an abandoned source.

DRAFT

**Attachment H**  
**Comment and Response**