

Final

Dry Run Watershed TMDL
Franklin County, Pennsylvania

Prepared by:



May 2013

TABLE OF CONTENTS

EXECUTIVE SUMMARY	4
TABLE 1. SUMMARY OF TMDL FOR THE DRY RUN WATERSHED IN LBS./YR. & LBS./DAY	4
INTRODUCTION	5
TABLE 2. INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORT LISTED SEGMENTS	5
CLEAN WATER ACT REQUIREMENTS	6
PENNSYLVANIA CLEAN STREAMS LAW REQUIREMENTS AND AGRICULTURAL OPERATIONS.....	6
INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORT, LIST 5, 303(D), LISTING PROCESS.....	7
TABLE 3. IMPAIRMENT DOCUMENTATION AND ASSESSMENT CHRONOLOGY	8
BASIC STEPS FOR DETERMINING A TMDL	8
TMDL ELEMENTS (WLA, LA, MOS)	8
FUTURE TMDL MODIFICATIONS	8
CHANGES IN TMDLS THAT MAY REQUIRE EPA APPROVAL	9
CHANGES IN TMDLS THAT MAY NOT REQUIRE EPA APPROVAL	9
TMDL APPROACH	9
SELECTION OF THE REFERENCE WATERSHED.....	9
TABLE 4. COMPARISON OF THE DRY RUN & CAMPBELL RUN WATERSHEDS	10
<i>Figure 1. Impaired Portion of Dry Run Watershed</i>	12
<i>Figure 2. Reference Portion of Campbell Run Watershed</i>	13
HYDROLOGIC / WATER QUALITY MODELING.....	14
PART 1. MODEL OVERVIEW & DATA COMPILATION.....	14
PART 2. GIS BASED DERIVATION OF INPUT DATA	15
TABLE 5. GIS DATASETS	16
DATASET	16
WATERSHED ASSESSMENT AND MODELING.....	17
<i>Figure 3. Dry Run tributary running through livestock area</i>	18
<i>Figure 4. Trampled banks caused by livestock in Dry Run Watershed</i>	18
<i>Figure 5. Stream Buffering in Campbell Run Watershed</i>	19
<i>Figure 6. Grassy fields and buffered areas in Campbell Run Watershed</i>	19
TABLE 6. EXISTING LOADING VALUES FOR DRY RUN (IMPAIRED)	20
TABLE 7. EXISTING LOADING VALUES FOR CAMPBELL RUN (REFERENCE)	20
DEVELOPMENT OF SEDIMENT TMDL	20
TABLE 8. TMDL VALUES FOR THE DRY RUN WATERSHED	21
WASTE LOAD ALLOCATION.....	21
MARGIN OF SAFETY.....	21
LOAD ALLOCATION	22
ADJUSTED LOAD ALLOCATION	22
TABLE 9. LOAD ALLOCATIONS, LOADS NOT REDUCED AND ADJUSTED LOAD ALLOCATIONS	22
TMDL SUMMARY.....	22
TABLE 10. TMDL COMPONENTS FOR THE DRY RUN WATERSHED	22

CALCULATION OF SEDIMENT LOAD REDUCTIONS	23
TABLE 11. SEDIMENT LOAD ALLOCATIONS/REDUCTIONS FOR LAND USES AND STREAM BANKS IN THE DRY RUN WATERSHED (ANNUAL VALUES)	23
TABLE 12. SEDIMENT LOAD ALLOCATIONS/REDUCTIONS FOR LAND USES AND STREAM BANKS IN THE DRY RUN WATERSHED (DAILY VALUES)	23
CONSIDERATION OF CRITICAL CONDITIONS	24
CONSIDERATION OF SEASONAL VARIATIONS.....	24
CONSIDERATION OF BACKGROUND CONTRIBUTIONS.....	24
RECOMMENDATIONS	24
PUBLIC PARTICIPATION.....	26
LITERATURE CITED	26
ATTACHMENT A	27
MAPS OF DRY RUN WATERSHED.....	27
<i>Figure A1. Impaired Portion of Dry Run Watershed</i>	<i>28</i>
<i>Figure A2. Dry Run Watershed & Reference Watershed (Campbell Run).....</i>	<i>29</i>
ATTACHMENT B	30
EQUAL MARGINAL PERCENT REDUCTION METHOD	30
TABLE B1. EQUAL MARGINAL PERCENT REDUCTION CALCULATIONS FOR DRY RUN	32
ATTACHMENT C	33
AVGWLF GENERATED DATA TABLES	33
TABLE C1. DATA CONTAINED IN TRANSPRT.DAT FOR DRY RUN WATERSHED	34
TABLE C2. OUTPUTS FOR DRY RUN WATERSHED	35
TABLE C3. DATA CONTAINED IN TRANSPRT.DAT FOR CAMPBELL RUN WATERSHED.....	36
TABLE C4. OUTPUTS FOR CAMPBELL RUN WATERSHED	37
ATTACHMENT D	38
PENNSYLVANIA INTEGRATED WATER QUALITY MONITORING AND ASSESSMENT REPORT: STREAMS, CATEGORY 5 WATERBODIES, POLLUTANTS REQUIRING A TMDL	38
ATTACHMENT E	42
EXCERPTS JUSTIFYING CHANGES BETWEEN THE 1996, 1998, AND 2002.....	42
SECTION 303(D) LISTS AND THE 2004 AND 2006 INTEGRATED WATER QUALITY REPORTS	42
ATTACHMENT F.....	45
COMMENT AND RESPONSE	45

**TMDL
Dry Run Watershed
Franklin County, Pennsylvania**

Executive Summary

Dry Run is a tributary of West Branch Conococheague Creek in Franklin County, Pennsylvania (PA). The stream and all of its headwaters are located in Fannett Township, western Franklin County.

The stream and its tributaries originate in northern Franklin County near the town of Dry Run. While the entire watershed is approximately 15.2 square miles only a 9.5 square mile portion of the watershed is impaired. This portion makes up the headwaters to Dry Run and is the northernmost section of this watershed. Unless otherwise noted, any reference to the “Dry Run watershed” in this TMDL refers only to the impaired 9.5 square mile portion of the entire watershed. Land use in this 9.5 square mile portion of the watershed is composed of forestland, low intensity development, coal mines, wetlands and agricultural land including croplands and hay/pasture. The Dry Run watershed is currently designated as Cold Water Fishery (CWF), Migratory Fishery (MF) (PA Code 25 § 93.9z).

A Total Maximum Daily Load (TMDL) for sediment was developed to address impairments noted in Pennsylvania’s 2002 Section 303(d) list. The impairments were documented during biological surveys of the aquatic life present in the watershed (Schott, 2000). Excessive siltation resulting from agricultural activities has been identified as the cause of these impairments in the basin.

Pennsylvania does not currently have water quality criteria for sediment. A TMDL endpoint for sediment was identified using a reference watershed approach. The existing sediment loading in the Dry Run watershed is 1,912,118 pounds per year (5,239 pounds per day). Based on a comparison to a similar, unimpaired watershed, Campbell Run (see Figure 1 below), the maximum sediment loading that should still allow water quality objectives to be met in the Dry Run watershed is 1,264,250 pounds per year (3,464 pounds per day). Allocation of the sediment TMDL is summarized in Table 1 below:

Table 1. Summary of TMDL for the Dry Run Watershed in lbs./yr. & lbs./day						
Summary of TMDL for the Dry Run Watershed (lbs./yr.)						
Pollutant	TMDL	WLA*	MOS	LA	LNR	ALA
Sediment	1,264,250	279,161 (266,518)	126,425	858,665	173,200	685,465
Summary of TMDL for the Dry Run Watershed (lbs./day)						
Pollutant	TMDL	WLA*	MOS	LA	LNR	ALA
Sediment	3,464	765 (730)	346	2,353	475	1,878

*Contribution from permitted WLA (PA0595888) is shown in parenthesis

The Dry Run Watershed TMDL is allocated to point and nonpoint sources, with 10% of the TMDL reserved explicitly as a margin of safety (MOS). The wasteload allocation (WLA) is that portion of the total load assigned to point sources. A search of the Department’s eFACTS permit database identified 1 permitted, point source within the Dry Run watershed (NPDES Permit # PA0595888). The WLA is derived from the sum of the permitted discharges and a 1% bulk reserve included for

possible future wasteload allocations. The load allocation (LA) is that portion of the total load assigned to nonpoint sources. Loads not reduced (LNR) are the portion of the LA associated with nonpoint sources other than agricultural (croplands, hay/pasture), coal mines and stream banks and is equal to the sum of forested, wetland and low intensity development loadings. The adjusted load allocation (ALA) represents the remaining portion of the LA to be distributed among agricultural, coal mines and stream banks uses, receiving load reductions. The TMDL developed for the Dry Run watershed established a 34% reduction from the current sediment loading.

Introduction

This Total Maximum Daily Load (TMDL) calculation has been prepared for all impaired segments in the Dry Run Watershed (Attachment A). Dry Run is located off of Rt. 61 with the majority of the watershed accessible along Path Valley Road (Rt. 75) in Fannett Township. It flows into West Branch Conococheague Creek which eventually makes its way to the Potomac River. The watershed is located in State Water Plan (SWP) sub-basin 13C. The basin is currently designated as a Cold Water Fishery, Migratory Fishery (PA Code 25 § 93.9z)

While the entire watershed is approximately 15.2 square miles only a 9.5 square mile portion of the watershed is impaired. There are a total of 22.8 impaired stream miles in the watershed, including Dry Run itself and many of its unnamed tributaries. Land use in this watershed is composed of forestland (46%), low intensity development (3%), agriculture (50%) including croplands and hay/pasture and 1% coal mines.

The watershed is located in State Water Plan (SWP) Subbasin 13C and within Hydrologic Unit Code (HUC) 02070004-Conococheague-Opequon. MD, PA, VA, WV. This portion of Dry Run and its unnamed tributaries are included in the Ridge and Valley physiographic province with a mean basin elevation of 1060 ft. above sea level. The watershed has a 6.9 degree slope in conjunction with intensive agriculture in the tributaries and mainstem which create high velocity silt laden runoff during precipitation events, thus degrading the stream to the point of impairment. The TMDL was completed to address the impairments noted on the 2002 Pennsylvania 303(d) list, required under the Clean Water Act, and covers the listed segments shown in Table 2 below. Siltation from crop and grazing related agriculture has been listed as causing the impairment. The TMDL addresses siltation from croplands, coal mines, hay/pasture lands and stream banks.

Table 2. Integrated Water Quality Monitoring and Assessment Report Listed Segments				
State Water Plan (SWP) Subbasin: 13C				
HUC: 02070004-Conococheague-Opequon. MD, PA, VA, WV				
Watershed – Dry Run				
Source	EPA 305(b) Cause Code	Miles	Designated Use	Use Designation
Crop Related Agriculture	Siltation	26.99	CWF, MF	Aquatic Life
Grazing Related Agriculture	Siltation	26.99	CWF, MF	Aquatic Life

CWF= Cold Water Fishery MF= Migratory Fishery

The use designations for the stream segments in this TMDL can be found in PA Title 25 Chapter 93. See Attachments D & E, for more information on the listings and listing process.

Clean Water Act Requirements

Section 303(d) of the 1972 Clean Water Act requires states, territories, and authorized tribes to establish water quality standards. The water quality standards identify the uses for each waterbody and the scientific criteria needed to support that use. Uses can include designations for drinking water supply, contact recreation (swimming), and aquatic life support. Minimum goals set by the Clean Water Act require that all waters be “fishable” and “swimmable.”

Additionally, the federal Clean Water Act and the United States Environmental Protection Agency’s (EPA) implementing regulations (40 CFR 130) require:

- States to develop lists of impaired waters for which current pollution controls are not stringent enough to meet water quality standards (the list is used to determine which streams need TMDLs);
- States to establish priority rankings for waters on the lists based on severity of pollution and the designated use of the waterbody; states must also identify those waters for which TMDLs will be developed and a schedule for development;
- States to submit the list of waters to EPA every two years (April 1 of the even numbered years);
- States to develop TMDLs, specifying a pollutant budget that meets state water quality standards and allocate pollutant loads among pollution sources in a watershed, e.g., point and nonpoint sources; and
- EPA to approve or disapprove state lists and TMDLs within 30 days of final submission.

Despite these requirements, states, territories, authorized tribes, and EPA have not developed many TMDLs since 1972. Beginning in 1986, organizations in many states filed lawsuits against EPA for failing to meet the TMDL requirements contained in the federal Clean Water Act and its implementing regulations. While EPA has entered into consent agreements with the plaintiffs in several states, many lawsuits still are pending across the country.

In the cases that have been settled to date, the consent agreements require EPA to backstop TMDL development, track TMDL development, review state monitoring programs, and fund studies on issues of concern (e.g., Abandoned Mine Drainage (AMD), implementation of nonpoint source Best Management Practices (BMPs), etc.).

Pennsylvania Clean Streams Law Requirements and Agricultural Operations

All Pennsylvania farmers are subject to the water quality regulations authorized under the Pennsylvania Clean Streams Law, Title 25 Environmental Protection, and found within Chapters 91-93, 96, 102 and 105. These regulations include topics such as manure management, Concentrated Animal Operations (CAOs), Concentrated Animal Feeding Operations (CAFOs), Pollution Control and Prevention at Agricultural Operations, Water Quality Standards, Water Quality Standards Implementation, Erosion and Sediment Control Requirements, and Dam Safety and Waterway Management. To review these regulations, please refer to <http://pacode.com/> or the Pennsylvania Water Quality Action Packet for Agriculture which is supplied by the County Conservation Districts. To find your County Conservation District’s contact information, please

refer to <http://pacd.org/> or call any DEP office or the Pennsylvania Conservation Districts Headquarters at 717-238-7223.

Integrated Water Quality Monitoring and Assessment Report, List 5, 303(d), Listing Process

Prior to developing TMDLs for specific waterbodies, there must be sufficient data available to assess which streams are impaired and should be listed in the Integrated Water Quality Monitoring and Assessment Report. Prior to 2004 the impaired waters were found on the 303(d) List; from 2004 to present, the 303(d) List was incorporated into the Integrated Water Quality Monitoring and Assessment Report and found on List 5. Please see Table 3 below for a breakdown of the changes to listing documents and assessment methods through time.

With guidance from EPA, the states have developed methods for assessing the waters within their respective jurisdictions. From 1996-2006, the primary method adopted by the Pennsylvania Department of Environmental Protection for evaluating waters found on the 303(d) lists (1998-2002) or in the Integrated Water Quality Monitoring and Assessment Report (2004-2006) was the Statewide Surface Waters Assessment Protocol (SSWAP). SSWAP was a modification of the EPA Rapid Bioassessment Protocol II (RPB-II) and provided a more consistent approach to assessing Pennsylvania's streams.

The assessment method required selecting representative stream segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selected as many sites as necessary to establish an accurate assessment for a stream segment; the length of the stream segment could vary between sites. All the biological surveys included kick-screen sampling of benthic macroinvertebrates, habitat surveys, and measurements of pH, temperature, conductivity, dissolved oxygen, and alkalinity. Benthic macroinvertebrates were identified to the family level in the field.

The listings found in the Integrated Water Quality Monitoring and Assessment Reports from 2008 to present were derived based on the Instream Comprehensive Evaluation protocol (ICE). Like the SSWAP protocol that preceded the ICE protocol, the method requires selecting representative segments based on factors such as surrounding land uses, stream characteristics, surface geology, and point source discharge locations. The biologist selects as many sites as necessary to establish an accurate assessment for a stream segment; the length of the stream segment could vary between sites. All the biological surveys include D-frame kicknet sampling of benthic macroinvertebrates, habitat surveys, and measurements of pH, temperature, conductivity, dissolved oxygen, and alkalinity. Collected samples are returned to the laboratory where the samples are then subsampled to obtain a benthic macroinvertebrate sample of 200 + or - 20% (160 to 240). The benthic macroinvertebrates in this subsample were then identified to the generic level. The ICE protocol is a modification of the EPA Rapid Bioassessment Protocol III (RPB-III) and provides a more rigorous and consistent approach to assessing Pennsylvania's streams than the SSWAP.

After these surveys (SSWAP, 1998-2006 lists or ICE, 2008-present lists) were completed, the biologist determined the status of the stream segment. The decision was based on the performance of the segment using a series of biological metrics. If the stream segment was classified as impaired, it was then listed on the state's 303(d) List or presently the Integrated Water Quality Monitoring and Assessment Report with the source and cause documented.

Once a stream segment is listed as impaired, a TMDL must be developed for it. A TMDL addresses only one pollutant. If a stream segment is impaired by multiple pollutants, all of those pollutants receive separate and specific TMDLs within that stream segment. In order for the TMDL process to be most effective, adjoining stream segments with the same source and cause listing are addressed collectively on a watershed basis.

Listing Date	Listing Document	Assessment Method
1998	303(d) List	SSWAP
2002	303(d) List	SSWAP
2004	Integrated List	SSWAP
2006	Integrated List	SSWAP
2008-Present	Integrated List	ICE

Integrated List= Integrated Water Quality Monitoring and Assessment Report
SSWAP= Statewide Surface Waters Assessment Protocol
ICE= Instream Comprehensive Evaluation Protocol

Basic Steps for Determining a TMDL

Although all watersheds must be handled on a case-by-case basis when developing TMDLs, there are basic processes or steps that apply to all cases. They include:

1. Collection and summarization of pre-existing data (watershed characterization, inventory contaminant sources, determination of pollutant loads, etc.);
2. Calculate TMDL for the waterbody using EPA approved methods and computer models;
3. Allocate pollutant loads to various sources;
4. Determine critical and seasonal conditions;
5. Submit draft report for public review and comments; and
6. EPA approval of the TMDL.

TMDL Elements (WLA, LA, MOS)

A TMDL equation consists of a wasteload allocation, load allocation and a margin of safety. The wasteload allocation (WLA) is the portion of the load assigned to point sources (National Pollutant Discharge Elimination System (NPDES) permitted discharges). The load allocation (LA) is the portion of the load assigned to nonpoint sources (non-permitted). The margin of safety (MOS) is applied to account for uncertainties in the computational process. The MOS may be expressed implicitly (documenting conservative processes in the computations) or explicitly (setting aside a portion of the allowable load).

Future TMDL Modifications

In the future, the Department may adjust the load and/or wasteload allocations in this TMDL to account for new information or circumstances that are developed or discovered during the implementation of the TMDL when a review of the new information or circumstances indicate that such adjustments are appropriate. Adjustment between the load and wasteload allocation will only be made following an opportunity for public participation. A wasteload allocation adjustment will be made consistent and simultaneous with associated permit(s) revision(s)/reissuances (i.e., permits

for revision/reissuance in association with a TMDL revision will be made available for public comment concurrent with the related TMDLs availability for public comment). New information generated during TMDL implementation may include among other things, monitoring data, BMP effectiveness information, and land use information. All changes in the TMDL will be tallied and once the total changes exceed 1% of the total original TMDL allowable load, the TMDL will be revised. The adjusted TMDL, including its LAs and WLAs, will be set at a level necessary to implement the applicable water quality standards (WQS) and any adjustment increasing a WLA will be supported by reasonable assurance demonstration that load allocations will be met. The Department will notify EPA of any adjustments to the TMDL within 30 days of its adoption and will maintain current tracking mechanisms that contain accurate loading information for TMDL waters.

Changes in TMDLs That May Require EPA Approval

- Increase in total load capacity.
- Transfer of load between point (WLA) and nonpoint (LA) sources.
- Modification of the margin of safety (MOS).
- Change in water quality standards (WQS).
- Non-attainment of WQS with implementation of the TMDL.
- Allocation transfers in trading programs.

Changes in TMDLs That May Not Require EPA Approval

- Total loading shift less than or equal to 1% of the total load.
- Increase of WLA results in greater LA reductions provided reasonable assurance of implementation is demonstrated (a compliance/implementation plan and schedule).
- Changes among WLAs with no other changes; TMDL public notice concurrent with permit public notice.
- Removal of a pollutant source that will not be reallocated.
- Reallocation between LAs.
- Changes in land use.

TMDL Approach

The TMDL developed for the Dry Run Watershed addresses sediment. Because neither Pennsylvania nor EPA has water quality criteria for sediment, a method was developed to determine water quality objectives for this pollutant that should result in the impaired stream segments attaining their designated uses. The method employed for this TMDL is termed the “Reference Watershed Approach”.

Selection of the Reference Watershed

The reference watershed approach was used to estimate the appropriate sediment loading reduction necessary to restore healthy aquatic communities to the Dry Run watershed. This approach is based on selecting a non-impaired, or reference, watershed and estimating its current loading rates for the pollutants of interest. The objective of the process is to reduce loading rates of those pollutants identified as causing impairment to a level equivalent to or lower than the loading rates in the

reference watershed. Achieving the appropriate load reductions should allow the return of a healthy biological community to affected stream segments.

Three factors should be considered when selecting a suitable reference watershed: impairment status, similarity of physical properties, and size of the watershed. A watershed that the Department has assessed and determined to be attaining water quality standards should be used as the reference. Secondly, a watershed that closely resembles the impaired watershed in physical properties such as land use/land cover, physiographic province, and geology should be chosen. Finally, the size of the reference watershed should be within 20-30% of the impaired watershed area.

The search for a reference watershed that would satisfy the above characteristics was done by means of a desktop screening using several GIS shapefiles, including a watershed layer, geologic formations layer, physiographic province layer, soils layer, Landsat-derived land cover/use grid, and the stream assessment information found on the Department’s ICE GIS-based website. The suitability of the chosen watershed was confirmed through discussions with Department staff as well as through field verification of conditions.

A portion of Campbell Run was selected as the reference watershed for developing the Dry Run watershed TMDL (see Figure 2 below). Campbell Run is a tributary to Back Creek which eventually leads into Conococheague Creek. The portion used as the reference watershed encompasses the headwaters portion of Campbell Run. This part of Campbell Run is located in St. Thomas Township, Franklin County, Pennsylvania. The watershed is located in the Ridge and Valley physiographic province in State Water Plan (SWP) sub-basin 13C (Conococheague). Unless otherwise noted, any reference to the “Campbell Run Watershed” in this document refers only to this headwaters portion of the entire watershed. Campbell Run Watershed is identified in ICE as attaining its designated uses. The attainment of designated uses is based on biological sampling done by the Department. Table 4 below compares the two watersheds in terms of size, location, and other physical characteristics.

Table 4, compares the two watersheds in terms of size, location, and other physical characteristics.

Table 4. Comparison of the Dry Run & Campbell Run Watersheds		
	Dry Run Watershed	Campbell Run Watershed
Physiographic Province	Ridge and Valley	Ridge and Valley
Area (acres)	6093	5718
Land Use Distribution		
% Agriculture	50	53
% Forest	46	38
% Other	4	9
Soils Dominant Group	C	C
Dominant Surface Geology	Carbonate/Shale	Carbonate/Shale
Average Rainfall (in.)	39.67 (19 years)	39.67 (24 years)
Average Runoff (in.)	3.00 (19 years)	3.06 (24 years)

The analysis of value counts for each pixel of the Multi-Resolution Land Characterization (MRLC) grid revealed that land cover/use distributions in both watersheds are similar. Agriculture is the

dominant land use category in the Dry Run and Campbell Run watersheds, 50% and 53%, respectively.

Most of the impaired segment of Dry Run lies within the Martinsburg and Bellefont Formations. Surface geology in the watershed consists of carbonate, shale and fine grain sandstone. The Campbell Run Watershed geology consists of carbonate and shale with carbonate being the dominant geology. Both watersheds contain hydrologic soil group C, which is characterized by having moderately high runoff potential with a slow infiltration rate when thoroughly wet. This group consists chiefly of soils with a layer that impedes downward movement of water.

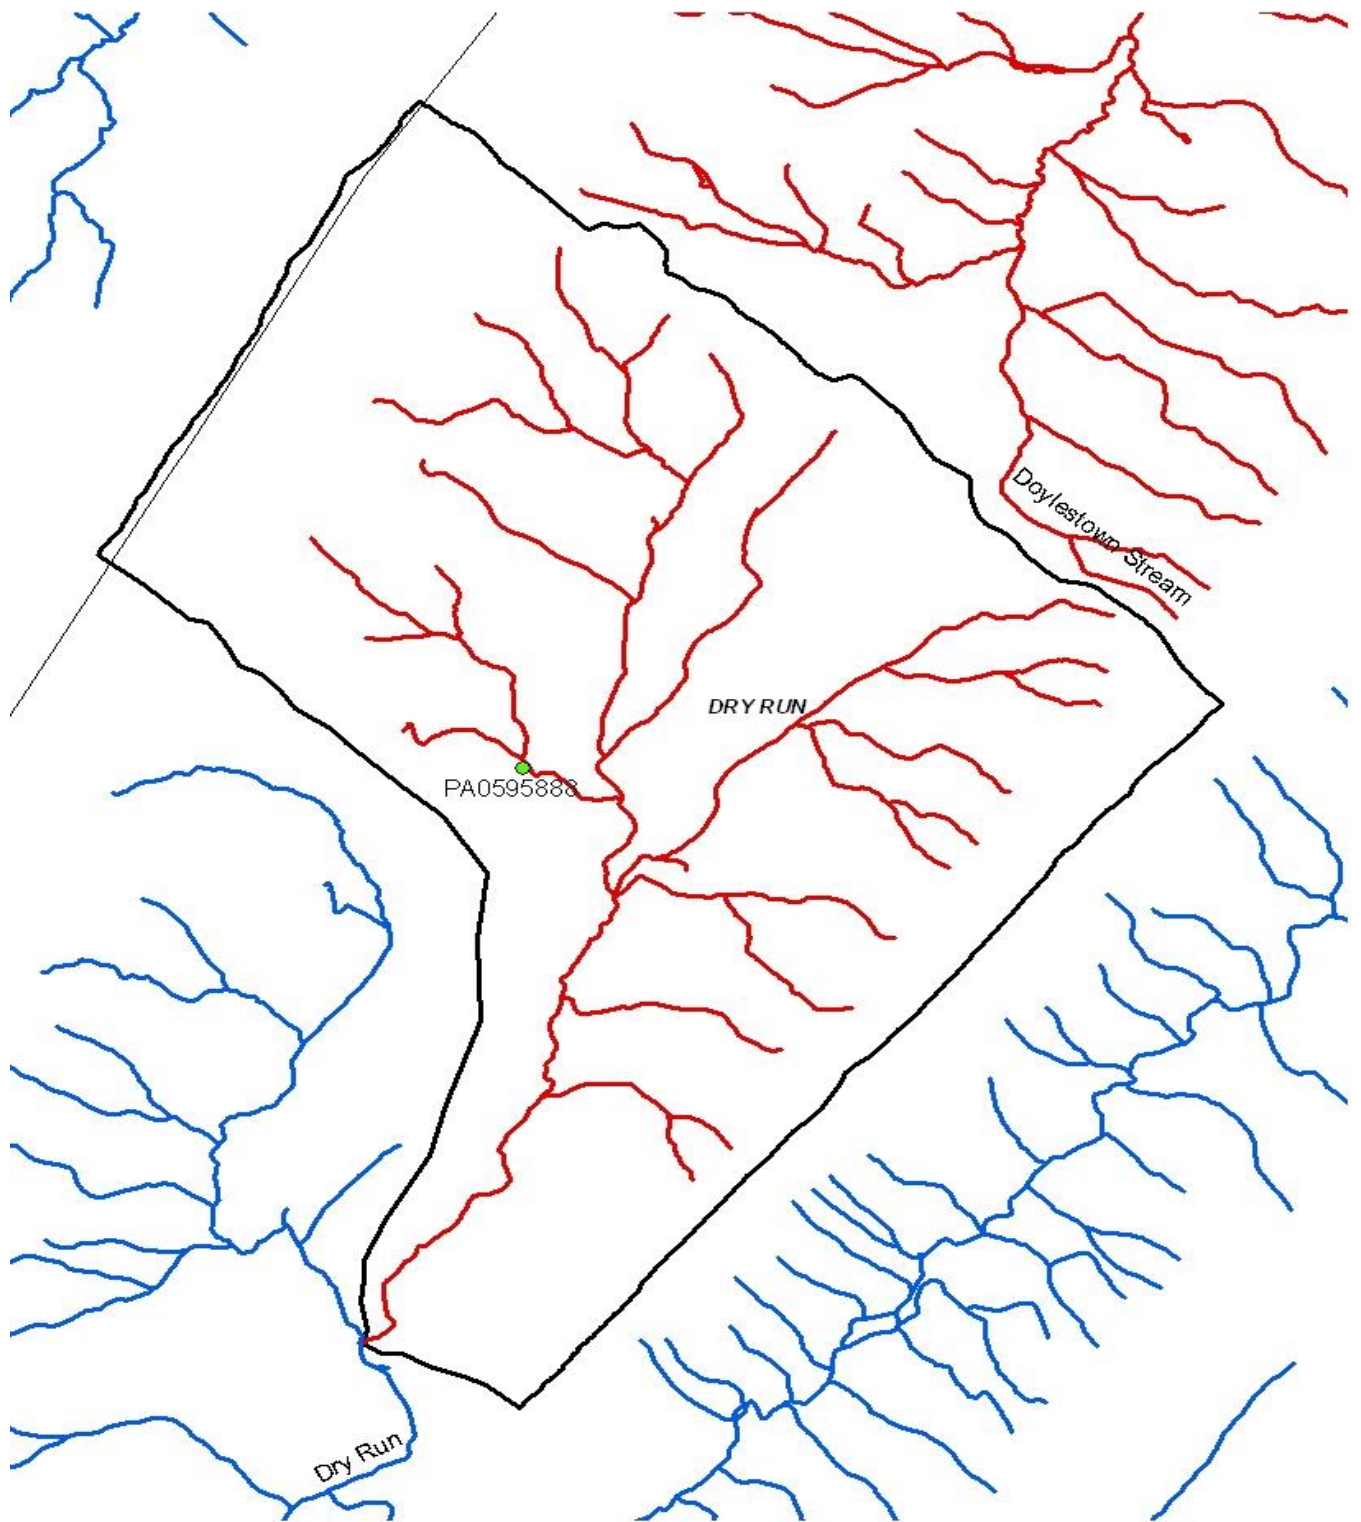


Figure 1. Impaired Portion of Dry Run Watershed

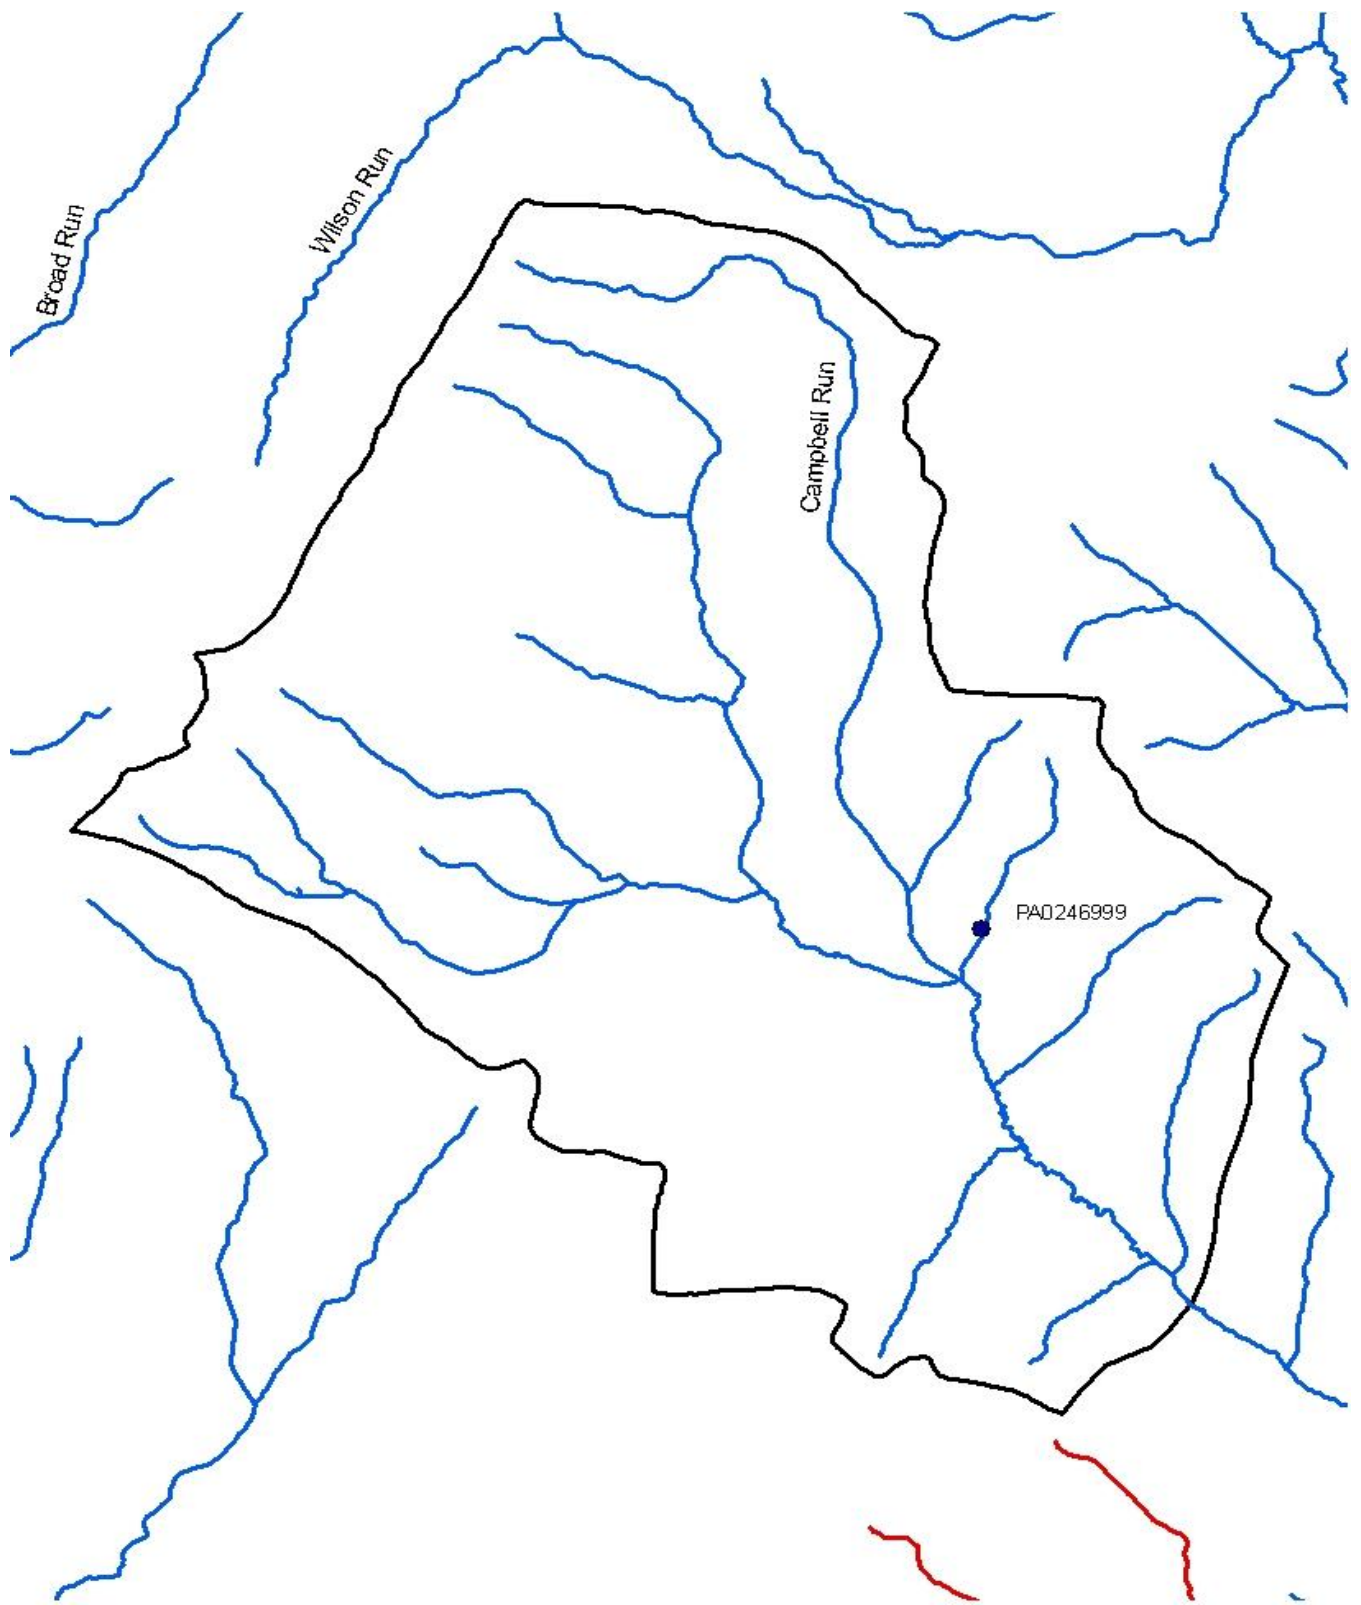


Figure 2. Reference Portion of Campbell Run Watershed

Hydrologic / Water Quality Modeling

Part 1. Model Overview & Data Compilation

The TMDL for this watershed was calculated using the ArcView Generalized Watershed Loading Function (AVGWLF) Interface for Windows, version 7.2.3. The remaining paragraphs in this section are excerpts from the GWLF User's Manual (Haith et al., 1992).

The core watershed simulation model for the AVGWLF software application is the GWLF (Generalized Watershed Loading Function) model developed by Haith and Shoemaker. The original DOS version of the model was re-written in Visual Basic by Evans et al. (2002) to facilitate integration with ArcView, and tested extensively in the U.S. and elsewhere.

The GWLF model provides the ability to simulate runoff and sediment load from a watershed given variable-size source areas (i.e., agricultural, forested, and developed land). It is a continuous simulation model that uses daily time steps for weather data and water balance calculations. Monthly calculations are made for sediment loads based on the daily water balance accumulated to monthly values.

GWLF is considered to be a combined distributed/lumped parameter watershed model. For surface loading, it is distributed in the sense that it allows multiple land use/cover scenarios, but each area is assumed to be homogenous in regard to various attributes considered by the model. Additionally, the model does not spatially distribute the source areas, but simply aggregates the loads from each source area into a watershed total; in other words there is no spatial routing. For sub-surface loading, the model acts as a lumped parameter model using a water balance approach. No distinctly separate areas are considered for sub-surface flow contributions. Daily water balances are computed for an unsaturated zone as well as a saturated sub-surface zone, where infiltration is simply computed as the difference between precipitation and snowmelt minus surface runoff plus evapotranspiration.

With respect to the major processes simulated, GWLF models surface runoff using the Soil Conservation Service Curve Number, or SCS-CN, approach with daily weather (temperature and precipitation) inputs. Erosion and sediment yield are estimated using monthly erosion calculations based on the Universal Soil Loss Equation USLE algorithm (with monthly rainfall-runoff coefficients) and a monthly composite of KLSCP values for each source area (i.e., land cover/soil type combination). The KLSCP factors are variables used in the calculations to depict changes in soil loss erosion (K), the length slope factor (LS), the vegetation cover factor (C), and the conservation practices factor (P). A sediment delivery ratio based on watershed size and transport capacity, which is based on average daily runoff, is then applied to the calculated erosion to determine sediment yield for each source area. Evapotranspiration is determined using daily weather data and a cover factor dependent upon land use/cover type. Finally, a water balance is performed daily using supplied or computed precipitation, snowmelt, initial unsaturated zone storage, maximum available zone storage, and evapotranspiration values.

For execution, the model requires two separate input files containing transport and weather-related data. The transport (transport.dat) file defines the necessary parameters for each source area to be

considered (e.g., area size, curve number, etc.) as well as global parameters (e.g., initial storage, sediment delivery ratio, etc.) that apply to all source areas. The weather (weather.dat) file contains daily average temperature and total precipitation values for each year simulated.

Since its initial incorporation into AVGWLF, the GWLF model has been revised to include a number of routines and functions not found in the original model. For example, a significant revision in one of the earlier versions of AVGWLF was the inclusion of a streambank erosion routine. This routine is based on an approach often used in the field of geomorphology in which monthly streambank erosion is estimated by first calculating a watershed-specific lateral erosion rate (LER). After a value for LER has been computed, the total sediment load generated via streambank erosion is then calculated by multiplying the above erosion rate by the total length of streams in the watershed (in meters), the average streambank height (in meters), and the average soil bulk density (in kg/m³).

The inclusion of the various model enhancements mentioned above has necessitated the need for several more input files than required by the original GWLF model, including a “scenario” (*.scn) file, an animal data (animal.dat) file. Also, given all of the new and recent revisions to the model, it has been renamed “GWLF-E” to differentiate it from the original model.

As alluded to previously, the use of GIS software for deriving input data for watershed simulation models such as GWLF is becoming fairly standard practice due to the inherent advantages of using GIS for manipulating spatial data. In this case, a customized interface developed by Penn State University for ArcView GIS software (versions 3.2 or 3.3) is used to parameterize input data for the GWLF-E model. In utilizing this interface, the user is prompted to load required GIS files and to provide other information related to various “non-spatial” model parameters (e.g., beginning and end of the growing season; the months during which manure is spread on agricultural land, etc.). This information is subsequently used to automatically derive values for required model input parameters which are then written to the appropriate input files needed to execute the GWLF-E model. Also accessed through the interface are Excel-formatted weather files containing daily temperature and precipitation information. (In the version of AVGWLF used in Pennsylvania, a statewide weather database was developed that contains about twenty-five (25) years of temperature and precipitation data for seventy-eight (78) weather stations around the state). This information is used to create the necessary weather.dat input file for a given watershed simulation.

Part 2. GIS Based Derivation of Input Data

The primary sources of data for this analysis were geographic information system (GIS) formatted databases and shapefiles. In using the AVGWLF interface, the user is prompted to identify required GIS files and to provide other information related to “non-spatial” model parameters (e.g. beginning and end of growing season, manure spreading period, etc.). This information is subsequently used to automatically derive values for required model input parameters, which are then written to the TRANSPRT.DAT and WEATHER.DAT input files needed to execute the GWLF model. For use in Pennsylvania, AVGWLF has been linked with statewide GIS data layers such as land use/cover, soils, topography and physiography; and includes location-specific default information such as cropping practices. Complete GWLF-formatted weather files are also included for the seventy-eight weather stations around the state.

Table 5 lists GIS datasets and shapefiles used for the Dry Run TMDL calculations via AVGWLF and provides explanations of how they were used for development of the input files for the GWLF model.

Table 5. GIS Datasets	
DATASET	DESCRIPTION
county.shp	The county boundaries coverage lists data on conservation practices which provides C and P values in the Universal Soil Loss Equation (USLE).
padem	100 meter digital elevation model; this is used to calculate landslope and slope length.
palumrlc	A satellite image derived land cover grid which is classified into 15 different landcover categories. This dataset provides landcover loading rates for the different categories in the model.
physprov.shp	A shapefile of physiographic provinces. This is used in rainfall erosivity calculations.
smallsheds.shp	A coverage of watersheds derived at 1:24,000 scale. This coverage is used with the stream network to delineate the desired level watershed.
streams.shp	The 1:24,000 scale single line stream coverage of Pennsylvania. Provides a complete network of streams with coded stream segments.
PAgeo	A shapefile of the surface geology used to compare watersheds of similar qualities.
weathersta.shp	Historical weather files for stations around Pennsylvania to simulate flow.
soils.shp	A shapefile providing soil characteristics data. This is used in multiple calculations.
zipcodes.shp	This shapefile provides animal density numbers used in the LER calculation.

In the GWLF model, the nonpoint source load calculated is affected by terrain conditions such as amount of agricultural land, land slope, and inherent soil erodibility. It is also affected by farming practices utilized in the area. Various parameters are included in the model to account for these conditions and practices. Some of the more important parameters are summarized below:

Areal extent of different land use/cover categories: This is calculated directly from a GIS layer of land use/cover.

Curve number: This determines the amount of precipitation that infiltrates into the ground or enters surface water as runoff. It is based on specified combinations of land use/cover and hydrologic soil type, and is calculated directly using digital land use/cover and soils layers.

K factor: This factor relates to inherent soil erodibility, and affects the amount of soil erosion taking place on a given unit of land.

LS factor: This factor signifies the steepness and length of slopes in an area and directly affects the amount of soil erosion.

C factor: This factor is related to the amount of vegetative cover in an area. In agricultural areas, the crops grown and the cultivation practices utilized largely control this factor. Values range from 0 to 1.0, with larger values indicating greater potential for erosion.

P factor: This factor is directly related to the conservation practices utilized in agricultural areas. Values range from 0 to 1.0, with larger values indicating greater potential for erosion.

Sediment delivery ratio: This parameter specifies the percentage of eroded sediment that is delivered to surface water and is empirically based on watershed size.

Unsaturated available water-holding capacity: This relates to the amount of water that can be stored in the soil and affects runoff and infiltration. It is calculated using a digital soils layer.

Other less important factors that can affect sediment loads in a watershed are also included in the model.

The above parameter descriptions were taken from the *AVGWLF Version 7.1 Users Guide* (Evans et al., 2007).

Watershed Assessment and Modeling

The AVGWLF model was used to establish existing loading conditions for the Dry Run and the Campbell Run watersheds. All AVGWLF data and outputs have been attached to this TMDL as Attachment C. DEP staff visited the Dry Run watershed and the Campbell Run watershed to get a better understanding of existing conditions that might influence the AVGWLF model. General observations of the individual watershed characteristics included:

Dry Run Watershed

- narrow and limited riparian buffers
- some tilled agriculture areas
- multiple locations with excessive sediment deposits in streambeds
- streambank erosion was evident
- livestock access to stream

Campbell Run Watershed

- extensive riparian buffers, both vegetated and forested
- grassy fields, contour, strip cropping
- cover crops

Based on these observations adjustments were made to specific parameters used in the AVGWLF model. These adjustments were as follows:

Dry Run Watershed

- The LS factor for cropland was changed to reflect the slope in the watershed.

Campbell Run Watershed

- The P factor for cropland was decreased from 0.52 to 0.30. This was done to account for adequate riparian buffer zones and streambank fencing evident in the reference watershed.



Figure 3. Dry Run tributary running through livestock area



Figure 4. Trampled banks caused by livestock in Dry Run Watershed



Figure 5. Stream Buffering in Campbell Run Watershed



Figure 6. Grassy fields and buffered areas in Campbell Run Watershed

The AVGWLF model produced area information and sediment loading based on land use (Tables 6 and 7).

Source	Area (ac)	Sediment (lbs.)	Unit Area Load (lbs./ac/yr)
HAY/PAST	2,130	244,600	115
CROPLAND	803	974,200	1,213
FOREST	2,728	168,600	62
WETLAND	12	0	0
Coal_Mines	45	800	18
LO_INT_DEV	173	4,600	27
Stream Bank		252,800	
Point Source		266,518	
total	5,891	1,912,118	325

Source	Area (ac)	Sediment (lbs.)	Unit Area Load (lbs./ac/yr)
HAY/PAST	2,525	196,400	78
CROPLAND	477	394,600	827
FOREST	2,145	147,800	69
WETLAND	57	0	0
LO_INT_DEV	467	50,200	107
Stream Bank		428,000	
Point Source		37	
total	5,671	1,217,037	215

For Tables 6 and 7 the “stream bank” sediment loads are calculated by AVGWLF’s stream bank routine. This routine uses stream bank (linear) miles rather than area.

Development of Sediment TMDL

The target TMDL value for the Dry Run watershed was established based on current loading rates for sediment in the Campbell Run reference watershed. Campbell Run is currently designated as a Cold Water Fishery, Migratory Fishery (CWF, MF) and previous biological assessments have determined that the portion of the basin used as a reference is attaining its designated uses. Reducing the loading rates of sediment in the Dry Run watershed to levels equal to, or less than, the reference watershed should allow for the reversal of current use impairments.

As described in the previous section, sediment loading rates were computed for the Campbell Run watershed using the AVGWLF model. The target TMDL value for sediment was determined by multiplying the unit area loading rates for the Campbell Run watershed by the total watershed area of the Dry Run watershed (Table 8).

Pollutant	Loading Rate in Reference (lb/ac-yr)	Total Area in Dry Run Watershed (ac)	Target TMDL Value (lb/yr)	Target TMDL Value (lb/day)
Sediment	215	5,891	1,264,250*	3,464

* takes into account rounding in previous calculations

The target TMDL value was then used as the basis for load allocations and reductions in the Dry Run Watershed, using the following two equations:

1. $TMDL = WLA + LA + MOS$
2. $LA = ALA + LNR$

Where:

TMDL = Total Maximum Daily Load
WLA = Waste Load Allocation (Point Sources)
LA = Load Allocation (Nonpoint Sources)
MOS = Margin of Safety
ALA = Adjusted Load Allocation
LNR = Loads Not Reduced

Waste Load Allocation

The waste load allocation (WLA) portion of the TMDL equation is the total loading of a pollutant that is assigned to point sources. There is one permitted discharge in the Dry Run Watershed. *New Enterprise Stone & Lime Co. Inc.*, NPDES No. PA0595888 has a permitted outfall, 002. The WLA was calculated with a TSS limit of 35 mg/l and a permitted flow of 2.5 mgd. A bulk reserve allocation of 1.0% of the TMDL is set to account for the dynamic nature of future permit activity. The bulk reserve was calculated at 12,643 lbs/year or 35 lbs/day.

$$\text{Sediment Outfall 002} = (2.5 \text{ MGD} \times 8.345^* \text{ lbs/million gallons} \times 35 \text{ mg/l} \times 365 \text{ days}) = 266,518 \text{ lbs/yr}$$

Or

$$\text{Sediment Outfall 002} = (2.5 \text{ MGD} \times 8.345^* \text{ lbs/million gallons} \times 35 \text{ mg/l}) = 730 \text{ lbs/day}$$

* Conversion factor

$$\text{Total WLA} = 266,518 \text{ lbs/yr (permitted discharge)} + 12,643 \text{ lbs/yr (bulk reserve)} = 279,161 \text{ lbs/yr or } 765 \text{ lbs/day}$$

Margin of Safety

The margin of safety (MOS) is that portion of the pollutant loading that is reserved to account for any uncertainty in the data and computational methodology used for the analysis. For this analysis, the MOS is explicit. Ten percent of the targeted TMDL for sediment was reserved as the MOS. Using 10% of the TMDL load is based on professional judgment and will provide an additional level of protection to the designated uses of Dry Run. The MOS used for the sediment TMDL was set at 126,425 lbs/yr.

$$MOS = 1,264,250 \text{ lbs/yr (TMDL)} \times 0.1 = 126,425 \text{ lbs/yr}$$

Or

$$\text{MOS} = 3,464 \text{ lbs/day (TMDL)} * 0.1 = 346 \text{ lbs/day}$$

Load Allocation

The load allocation (LA) is that portion of the TMDL that is assigned to nonpoint sources. The LA for sediment was computed by subtracting the MOS value and the WLA from the TMDL value. The LA for sediment was 858,665 lbs/yr

$$\text{LA} = 1,264,250 \text{ lbs/yr (TMDL)} - 126,425 \text{ lbs/yr (MOS)} - 279,161 \text{ lbs./yr. (WLA)} = 858,665 \text{ lbs/yr}$$

Or

$$\text{LA} = 3,464 \text{ lbs/day (TMDL)} - 346 \text{ lbs/day (MOS)} - 765 \text{ lbs./day (WLA)} = 2,353 \text{ lbs/day}$$

Adjusted Load Allocation

The adjusted load allocation (ALA) is the actual portion of the LA distributed among those nonpoint sources receiving reductions. It is computed by subtracting those nonpoint source loads that are not being considered for reductions (loads not reduced (LNR)) from the LA. While the Dry Run Watershed TMDL was developed to address impairments caused by agricultural activities including, hay/pastureland (Hay/Past) and Cropland, they were not the only land uses considered for reductions. Coal mines and stream banks noted in the Dry Run Watershed were believed to also be a contributor to the sediment load in the watershed. Land uses/source loads not reduced (LNR) were carried through at their existing loading values (Table 9).

Table 9. Load Allocations, Loads Not Reduced and Adjusted Load Allocations		
	Sediment (lbs/yr)	Sediment (lbs/day)
Load Allocation	858,665	2,353
Loads Not Reduced:		
Forest	168,600	462
LO_INT_DEV	4,600	13
Wetland	0	0
Adjusted Load Allocation	685,465	1,878

TMDL Summary

The sediment TMDL established for the Dry Run Watershed consists of a Load Allocation (LA), Wasteload Allocation (WLA) and a Margin of Safety (MOS). The individual components of the Dry Run Watershed TMDL are summarized in Table 10.

Table 10. TMDL Components for the Dry Run Watershed		
Component	Sediment (lbs/yr)	Sediment (lbs/day)
TMDL (Total Maximum Daily Load)	1,264,250	3,464
WLA (Waste Load Allocation)	279,161	765
Permitted Discharge (PA0595888)	266,518	730
Bulk Reserve	12,643	35
MOS (Margin of Safety)	126,425	346
LA (Load Allocation)	858,665	2,353
LNR Loads Not Reduced)	173,200	475
ALA (Adjusted Load Allocation)	685,465	1,878

Calculation of Sediment Load Reductions

The adjusted load allocation established in the previous section represents the sediment load that is available for allocation between Hay/Pasture, Cropland, coal mines/quarry and stream banks in the Dry Run Watershed. Data needed for load reduction analyses, including land use distribution, were obtained by GIS analysis. The Equal Marginal Percent Reduction (EMPR) allocation method, Attachment B, was used to distribute the ALA between the three land use types and stream banks. The process is summarized below:

1. Each land use/source load is compared with the total allocable load to determine if any contributor would exceed the allocable load by itself. The evaluation is carried out as if each source is the only contributor to the pollutant load to the receiving waterbody. If the contributor exceeds the allocable load, that contributor would be reduced to the allocable load. This is the baseline portion of EMPR. For this evaluation no individual land use was in excess of the adjusted load allocation (ALA).
2. After any necessary reductions have been made in the baseline, the multiple analyses are run. The multiple analyses will sum all of the baseline loads and compare them to the total allocable load. If the allocable load is exceeded, an equal percent reduction will be made to all contributors' baseline values. After any necessary reductions in the multiple analyses, the final reduction percentage for each contributor can be computed. For this evaluation the allocable load was exceeded.

Tables 11 and 12 contain the results of the EMPR for Hay/Pasture, Cropland, coal mines/quarry and stream banks in the Dry Run Watershed. The load allocation for each land use is shown along with the percent reduction of current loads necessary to reach the targeted LA.

Table 11. Sediment Load Allocations/Reductions for Land Uses and Stream Banks in the Dry Run Watershed (Annual Values)

		Current Loading	Allowable Loading	Current Load	Load Allocation	
Land Use	Acres	(lbs/acre/yr)	(lbs/acre/yr)	(lbs/yr)	(lbs/yr)	% Reduction
Cropland	803	1213.05	494.28	974,200	396,955	59
Hay/Pasture	2,130	114.84	66.50	244,600	141,649	42
Coal Mines/ quarry	45	17.98	10.41	800	463	42
Stream banks				252,800	146,397	42

Table 12. Sediment Load Allocations/Reductions for Land Uses and Stream Banks in the Dry Run Watershed (Daily Values)

		Current Loading	Allowable Loading	Current Load	Load Allocation	
Land Use	Acres	(lbs/acre/day)	(lbs/acre/day)	(lbs/day)	(lbs/day)	% Reduction
Cropland	803	3.32	1.35	2,669	1,088	59
Hay/Pasture	2,130	0.31	0.18	670	388	42
Coal Mines/ quarry	45	0.05	0.03	2.19	1.27	42
Stream banks				693	401	42

Consideration of Critical Conditions

The AVGWLF model is a continuous simulation model, which uses daily time steps for weather data and water balance calculations. Monthly calculations are made for sediment loads, based on daily water balance accumulated in monthly values. Therefore, all flow conditions are taken into account for loading calculations. Because there is generally a significant lag time between the introduction of sediment to a waterbody and the resulting impact on beneficial uses, establishing this TMDL using average annual conditions is protective of the waterbody.

Consideration of Seasonal Variations

The continuous simulation model used for this analysis considers seasonal variation through a number of mechanisms. Daily time steps are used for weather data and water balance calculations. The model requires specification of the growing season and hours of daylight for each month. The model also considers the months of the year when manure is applied to the land. The combination of these actions by the model accounts for seasonal variability.

Consideration of Background Contributions

The AVGWLF model accounts for all landuses within the watershed and their respective contributions to the sediment load. The only background sources of sediment within the watershed would be from forested areas. There are no additional “upstream” sources of sediment to this watershed as the Dry Run Watershed including all headwaters was assessed and modeled. The remaining landuses are anthropogenic sources of sediment to the watershed, thus will not be considered background.

Recommendations

Sediment reduction in the TMDL is allocated to point and nonpoint sources in the watershed including: agricultural activities, coal mines and stream banks. Implementation of best management practices (BMPs) in the affected areas should achieve the loading reduction goals established in the TMDL. The Department will assure that cost-effective and reasonable best management practices for nonpoint source control are achieved.

From an agricultural perspective, reductions in the amount of sediment reaching the streams in the watershed can be made through the right combination of BMPs including, but not limited to: establishment of cover crops, strip cropping, residue management, no till, crop rotation, contour farming, terracing, stabilizing heavy use areas and proper management of storm water. Vegetated or forested buffers would be acceptable BMPs to intercept any runoff from farm fields. For the pasturing of farm animals and animal heavy use areas, acceptable BMPs may include: manure storage, rotational grazing, livestock exclusion fencing and forested riparian buffers. Some of these BMPs were observed in the Dry Run Watershed; however, they were more extensively used in the Campbell Run Watershed. Being that both watersheds have a considerable amount of agricultural activities, it is apparent that the greater use of these BMPs in the reference watershed has contributed to its ability to maintain its attainment status as an unimpaired stream.

Stream banks contribute to the sediment load in Dry Run. Stream bank stabilization projects would be acceptable BMPs for the eroded stream banks in the area. However, the establishment of forested riparian buffers is the most economical and effective BMP at providing stream bank stabilization and protection of the banks from freeze/thaw erosion and scouring flows. Forested riparian buffers also provide important natural and durable connectivity of land and water. This connectivity is necessary to provide cover, nesting and nursery sites, shade and stable temperatures, and viable substrate for aquatic organisms of all layers of the food web.

Important to TMDLs, established forested riparian buffers act as nutrient and sediment sinks. This is because the highly active and concentrated biological communities they maintain will assimilate and remove nutrients and sediment from the water column instead of allowing them to pass downstream, thus forested riparian buffers work directly toward attaining the goals of the TMDL by reducing pollutant loads. Forested riparian buffers also provide critical habitat to rare and sensitive amphibious and terrestrial organisms as well as migratory species. While forested riparian buffers are considered the most effective BMP, other possibilities for attaining the desired reductions may exist for the agricultural usages, as well as for the stream banks.

For both the agricultural landuses, further ground truthing should be performed in order to assess both the extent of existing BMPs, and to determine the most cost effective and environmentally protective combination of BMPs required for meeting the sediment reductions outlined in this report. A combined effort involving key personnel from the regional DEP office, the Franklin County Conservation District, Interstate Commission of the Potomac River Basin (ICPRB) and other state and local agencies and/or watershed groups would be the most effective in accomplishing any ground truthing exercises. Development of a more detailed watershed implementation plan is recommended.

The Chesapeake Bay TMDL, established by EPA in 2010, requires reductions of nitrogen, phosphorus and sediment loads throughout the Bay watershed to meet water quality standards that protect the designated uses in the Bay and its tidal tributaries. Pennsylvania's Phase I and Phase II WIPs together with the State's schedule of two-year milestones provide implementation strategies and a time line for achieving sediment reductions across Pennsylvania's Chesapeake Bay watershed to meet Chesapeake Bay interim target loads by 2017, equivalent to 60% of the final target goals set for 2025 to fully implement the Chesapeake Bay TMDL in Pennsylvania. A Phase III Plan will be developed in 2018 to address the additional reductions needed from 2018 through 2025 to meet the final targets.

The sediment reductions for the Bay TMDL are independent of those needed to implement any TMDLs developed to address sediment-related impairments in Pennsylvania's non-tidal waterbodies, although their reduction goals and strategies do overlap. For example, the implementation planning framework, developed by the Bay watershed jurisdictions in partnership with EPA, provides a staged approach to achieving Bay TMDL sediment reduction goals that is also applicable to implementation of sediment TMDLs in local non-tidal watersheds. In short, sediment reductions required to meet the Chesapeake Bay TMDL will also support the restoration and protection of local water quality and vice versa. Links to Chesapeake Bay TMDL related documents are provided below.

PADEP Chesapeake Bay Program website:

http://www.portal.state.pa.us/portal/server.pt/community/chesapeake_bay_program/10513

Pennsylvania's Phase I WIP:

[http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/WIPs/RE
VISED%20FINAL%20Chesapeake%20Bay%20WIP%20-%20sent%20to%20EPA%2012-23-
10.pdf](http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/WIPs/RE%20VISED%20FINAL%20Chesapeake%20Bay%20WIP%20-%20sent%20to%20EPA%2012-23-10.pdf)

Pennsylvania's Phase II WIP:

[http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/4-2-
2012/Clean%20FINAL%20Phase%202%20WIP%203-30-2012%20\(2\).pdf](http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/4-2-2012/Clean%20FINAL%20Phase%202%20WIP%203-30-2012%20(2).pdf)

Pennsylvania's Phase II WIP Wastewater Supplement:

[http://files.dep.state.pa.us/Water/Wastewater%20Management/EDMRPortalFiles/Phase_2_WIP_Su
pplement.pdf](http://files.dep.state.pa.us/Water/Wastewater%20Management/EDMRPortalFiles/Phase_2_WIP_Supplement.pdf)

Pennsylvania's Milestones for 2012-2013:

[http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/7-9-
2012/PA%20FINAL%202012-2013%20Milestones.pdf](http://files.dep.state.pa.us/Water/Chesapeake%20Bay%20Program/ChesapeakePortalFiles/7-9-2012/PA%20FINAL%202012-2013%20Milestones.pdf)

Public Participation

Public notice of the draft TMDL was published in the *Pennsylvania Bulletin* on April 6, 2013 to foster public comment on the allowable loads calculated.

Literature Cited

Haith, D. A.; Mandel, R.; Wu, R. S. for Cornell University *Generalized Watershed Loading Functions Version 2.0 User's Manual*; Ithaca, NY, 1992.

Evans, B. M.; Lehning, D. W.; Corradini, K. J. for The Pennsylvania State University *AVGWLF Version 7.1 Users Guide*; University Park, PA, 2007.

Attachment A
Maps of Dry Run Watershed



Figure A1. Impaired Portion of Dry Run Watershed

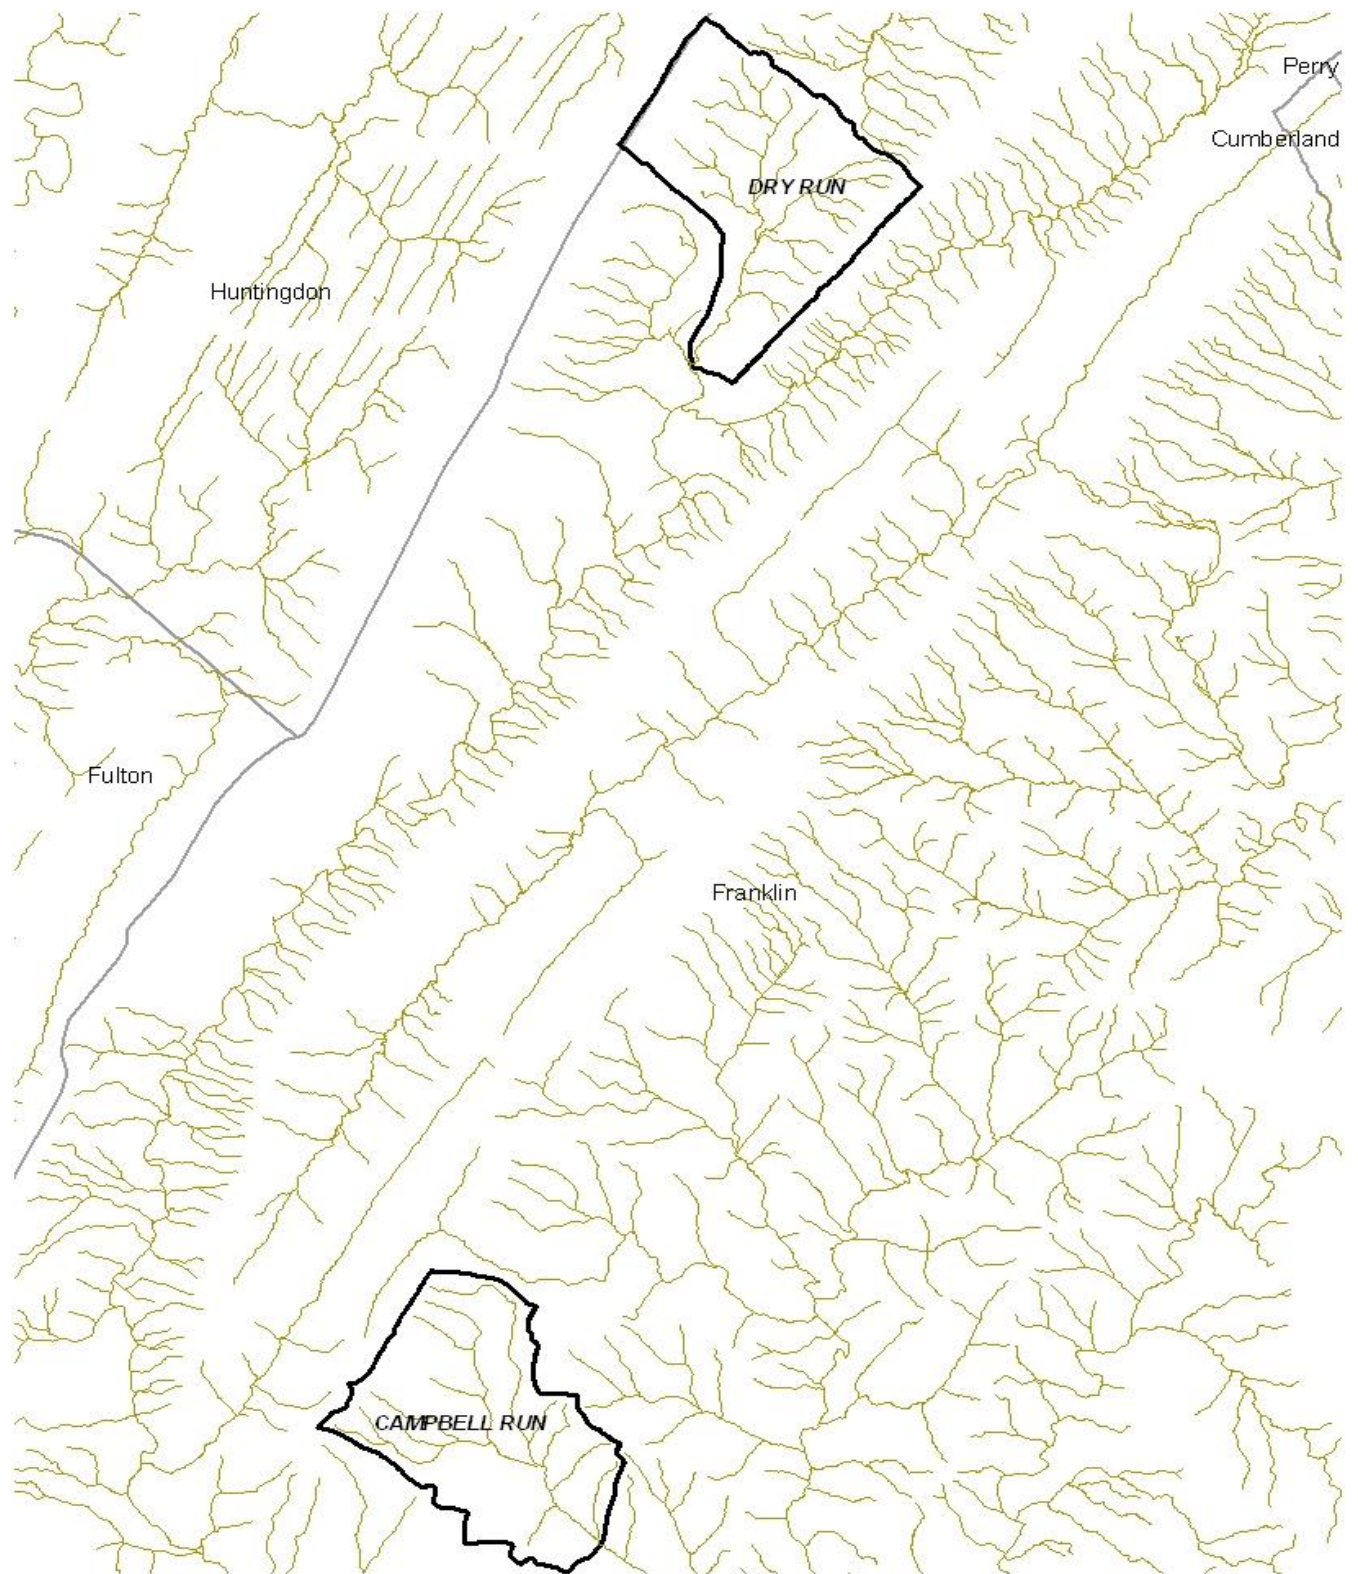


Figure A2. Dry Run Watershed & Reference Watershed (Campbell Run)

Attachment B
Equal Marginal Percent Reduction Method

Equal Marginal Percent Reduction (EMPR) (An Allocation Strategy)

The Equal Marginal Percent Reduction (EMPR) allocation method was used to distribute Adjusted Load Allocations (ALAs) between the appropriate contributing nonpoint sources. The load allocation and EMPR procedures were performed using a MS Excel spreadsheet. The 5 major steps identified in the spreadsheet are summarized below:

- Step 1:** Calculation of the TMDL based on impaired watershed size and unit area loading rate of reference watershed.
- Step 2:** Calculation of Adjusted Load Allocation based on TMDL, Margin of Safety, and existing loads not reduced.
- Step 3:** Actual EMPR Process:
- a. Each land use/source load is compared with the total ALA to determine if any contributor would exceed the ALA by itself. The evaluation is carried out as if each source is the only contributor to the pollutant load of the receiving waterbody. If the contributor exceeds the ALA, that contributor would be reduced to the ALA. If a contributor is less than the ALA, it is set at the existing load. This is the baseline portion of EMPR.
 - b. After any necessary reductions have been made in the baseline, the multiple analyses are run. The multiple analyses will sum all of the baseline loads and compare them to the ALA. If the ALA is exceeded, an equal percent reduction will be made to all contributors' baseline values. After any necessary reductions in the multiple analyses, the final reduction percentage for each contributor can be computed.
- Step 4:** Calculation of total loading rate of all sources receiving reductions.
- Step 5:** Summary of existing loads, final load allocations, and % reduction for each pollutant source.

Attachment C
AVGWLF Generated Data Tables

Rural LU						
	Area (ha)	CN	K	LS	C	P
Hay/Past	862	75	0.198	1.003	0.03	0.52
Cropland	325	82	0.222	0.675	0.42	0.52
Forest	1104	73	0.196	6.446	0.002	0.66
Wetland	5	87	0.212	0.069	0.01	0.1
Coal_Mines	18	87	0.24	0.186	0.1	0.1
	0	0	0	0	0	0
	0	0	0	0	0	0
	0	0	0	0	0	0
Bare Land						
	Area (ha)	CN	K	LS	C	P
	0	0	0	0	0	0
	0	0	0	0	0	0
Urban LU						
	Area (ha)	CN	K	LS	C	P
Lo_Int_Dev	70	83	0.22	0.207	0.08	0.2
	0	0	0	0	0	0

Month	Ket	Day Hours	Season	Eros Coef	Stream Extract	Ground Extract
Jan	0.69	9.4	0	0.12	0	0
Feb	0.74	10.4	0	0.12	0	0
Mar	0.77	11.8	0	0.12	0	0
Apr	0.79	13.2	0	0.3	0	0
May	0.95	14.3	1	0.3	0	0
Jun	1.05	14.8	1	0.3	0	0
Jul	1.1	14.6	1	0.3	0	0
Aug	1.13	13.6	1	0.3	0	0
Sep	1.15	12.2	1	0.12	0	0
Oct	1.01	10.8	0	0.12	0	0
Nov	0.93	9.7	0	0.12	0	0
Dec	0.88	9.2	0	0.12	0	0

Init Unsat Stor (cm)	10	Initial Snow (cm)	0	Recess Coefficient	0.1
Init Sat Stor (cm)	0	Sed Delivery Ratio	0.167	Seepage Coefficient	0
Unsat Avail Wat (cm)	11.8836	Tile Drain Ratio	0.5	Sediment A Factor	2.9395E-04
		Tile Drain Density	0	Sed A Adjustment Factor	1

Table C1. Data contained in TRANSPRT.DAT for Dry Run Watershed

GWLF Total Loads for file: dryrun_9-22-9397

Period of analysis: 24 years from 1975 to 1998

Source	Area (Acres)	Runoff (in)	Tons		Total Loads (Pounds)			
			Erosion	Sediment	Dis N	Total N	Dis P	Total P
Hay/Past	2130.0	2.8	732.4	122.3	3520.7	4254.5	413.0	522.1
Cropland	803.1	4.7	2916.8	487.1	2243.2	5165.8	262.3	696.8
Forest	2728.0	2.4	504.9	84.3	284.3	790.2	9.0	84.2
Wetland	12.4	7.1	0.0	0.0	3.8	3.8	0.1	0.1
Coal_Mines	44.5	7.1	2.2	0.4	0.9	3.1	0.1	0.5
Lo_Int_Dev	173.0	5.1	14.0	2.3	0.0	76.5	0.0	10.2
Farm Animals						0.0		0.0
Tile Drainage				0.0		0.0		0.0
Stream Bank				126.4		12.7		5.6
Groundwater					42931.4	42931.4	490.3	490.3
Point Sources					0.0	0.0	0.0	0.0
Septic Systems					234.9	234.9	43.2	43.2
Totals	5891.0	3.00	4170.3	822.8	49219.0	53472.8	1218.0	1852.9

[Go Back](#)
[Pathogen Loads](#)
[Export to JPEG](#)
[Print](#)
[Close](#)

Table C2. Outputs for Dry Run Watershed

Rural LU						
	Area (ha)	CN	K	LS	C	P
Hay/Past	1022	75	0.26	0.594	0.03	0.45
Cropland	193	82	0.28	0.629	0.42	0.3
Forest	868	73	0.212	6.602	0.002	0.66
Wetland	23	87	0.301	0.155	0.01	0.1
	0	0	0	0	0	0
	0	0	0	0	0	0
	0	0	0	0	0	0
	0	0	0	0	0	0
Bare Land						
	Area (ha)	CN	K	LS	C	P
	0	0	0	0	0	0
	0	0	0	0	0	0
Urban LU						
	Area (ha)	CN	K	LS	C	P
Lo_Int_Dev	189	83	0.273	0.659	0.08	0.2
	0	0	0	0	0	0

Month	Ket	Day Hours	Season	Eros Coef	Stream Extract	Ground Extract
Jan	0.75	9.4	0	0.12	0	0
Feb	0.81	10.4	0	0.12	0	0
Mar	0.84	11.8	0	0.12	0	0
Apr	0.86	13.2	0	0.3	0	0
May	1.01	14.3	1	0.3	0	0
Jun	1.09	14.8	1	0.3	0	0
Jul	1.14	14.6	1	0.3	0	0
Aug	1.17	13.6	1	0.3	0	0
Sep	1.18	12.2	1	0.12	0	0
Oct	1.06	10.8	0	0.12	0	0
Nov	0.99	9.7	0	0.12	0	0
Dec	0.95	9.2	0	0.12	0	0

Init Unsat Stor (cm)	10	Initial Snow (cm)	0	Recess Coefficient	0.1
Init Sat Stor (cm)	0	Sed Delivery Ratio	0.168	Seepage Coefficient	0
Unsat Avail Wat (cm)	18.2087	Tile Drain Ratio	0.5	Sediment A Factor	6.6007E-04
		Tile Drain Density	0	Sed A Adjustment Factor	1

Table C3. Data contained in TRANSPRT.DAT for Campbell Run Watershed

GWLF Total Loads for file: **campbellrun_9-22-10400**

Period of analysis: **24 years from 1975 to 1998**

Source	Area [Acres]	Runoff [in]	Tons		Total Loads (Pounds)			
			Erosion	Sediment	Dis N	Total N	Dis P	Total P
Hay/Past	2525.4	2.8	584.3	98.2	4174.2	4763.3	455.5	559.6
Cropland	476.9	4.7	1174.5	197.3	1332.1	2516.0	144.8	353.9
Forest	2144.9	2.4	439.8	73.9	223.5	666.8	7.1	85.4
Wetland	56.8	7.1	0.3	0.0	17.4	17.6	0.6	0.6
Lo_Int_Dev	467.0	5.1	149.2	25.1	0.0	206.5	0.0	27.5
Farm Animals						0.0		0.0
Tile Drainage				0.0		0.0		0.0
Stream Bank				214.0		21.4		9.4
Groundwater					38489.4	38489.4	406.9	406.9
Point Sources					0.0	0.0	0.0	0.0
Septic Systems					162.8	162.8	22.5	22.5
Totals	5671.1	3.10	2348.1	608.5	44399.4	46843.8	1037.3	1465.9

[Go Back](#)
[Pathogen Loads](#)
[Export to JPEG](#)
[Print](#)
[Close](#)

Table C4. Outputs for Campbell Run Watershed

Attachment D
Pennsylvania Integrated Water Quality Monitoring and Assessment
Report: Streams, Category 5 Waterbodies, Pollutants Requiring a TMDL

Stream Name

Use Designation (Assessment ID)

Source Cause Date Listed TMDL Date

Hydrologic Unit Code: 02070004-Conococheague

Dry Run

HUC: 02070004

Aquatic Life (1568) - 4.76 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59701)

HUC: 02070004

Aquatic Life (1568) - 0.77 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59702)

HUC: 02070004

Aquatic Life (1568) - 0.28 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59703)

HUC: 02070004

Aquatic Life (1568) - 0.88 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59704)

HUC: 02070004

Aquatic Life (1568) - 1.16 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59705)

HUC: 02070004

Aquatic Life (1568) - 0.67 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59706)

HUC: 02070004

Aquatic Life (1568) - 2.28 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59707)

HUC: 02070004

Aquatic Life (1568) - 0.14 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

Dry Run (Unt 59708)

HUC: 02070004

Aquatic Life (1568) - 0.88 miles

Crop Related Agric

Siltation

2002

2015

Grazing Related Agric

2002

2015

2008 Pennsylvania Integrated Water Quality Monitoring and Assessment Report - Streams, Category 5 Waterbodies, Pollutants Requiring a TMDL

Stream Name

Use Designation (Assessment ID)

Source	Cause	Date Listed TMDL Date	
<u>Dry Run (Unt 59709)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.84 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59710)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.34 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59711)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.82 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59712)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.38 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59713)</u>			
HUC: 02070004			
Aquatic Life (1568) - 1.93 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59714)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.53 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59715)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.33 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59716)</u>			
HUC: 02070004			
Aquatic Life (1568) - 1.7 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59717)</u>			
HUC: 02070004			
Aquatic Life (1568) - 1.66 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015

2008 Pennsylvania Integrated Water Quality Monitoring and Assessment Report - Streams, Category 5 Waterbodies, Pollutants Requiring a TMDL

Stream Name

Use Designation (Assessment ID)

Source	Cause	Date Listed	TMDL Date
<u>Dry Run (Unt 59719)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.97 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59721)</u>			
HUC: 02070004			
Aquatic Life (1568) - 2.22 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59722)</u>			
HUC: 02070004			
Aquatic Life (1568) - 1.89 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59723)</u>			
HUC: 02070004			
Aquatic Life (1568) - 1.28 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015
<u>Dry Run (Unt 59724)</u>			
HUC: 02070004			
Aquatic Life (1568) - 0.28 miles			
Crop Related Agric	Siltation	2002	2015
Grazing Related Agric		2002	2015

Attachment E
Excerpts Justifying Changes between the 1996, 1998, and 2002
Section 303(d) Lists and the 2004 and 2006 Integrated Water Quality
Reports

The following are excerpts from the Pennsylvania DEP Section 303(d) narratives that justify changes in listings between the 1996, 1998, and 2002 303(d) Lists and the 2004 and 2006 Integrated Water Quality Report. The Section 303(d) listing process has undergone an evolution in Pennsylvania since the development of the 1996 list.

In the 1996 Section 303(d) narrative, strategies were outlined for changes to the listing process. Suggestions included, but were not limited to, a migration to a Global Information System (GIS), improved monitoring and assessment, and greater public input.

The migration to a GIS was implemented prior to the development of the 1998 Section 303(d) list. As a result of additional sampling and the migration to the GIS some of the information appearing on the 1996 list differed from the 1998 list. Most common changes included:

1. mileage differences due to recalculation of segment length by the GIS;
2. slight changes in source(s)/cause(s) due to new EPA codes;
3. changes to source(s)/cause(s), and/or miles due to revised assessments;
4. corrections of misnamed streams or streams placed in inappropriate SWP subbasins; and
5. unnamed tributaries no longer identified as such and placed under the named watershed listing.

Prior to 1998, segment lengths were computed using a map wheel and calculator. The segment lengths listed on the 1998 Section 303(d) list were calculated automatically by the GIS (ArcInfo) using a constant projection and map units (meters) for each watershed. Segment lengths originally calculated by using a map wheel and those calculated by the GIS did not always match closely. This was the case even when physical identifiers (e.g., tributary confluence and road crossings) matching the original segment descriptions were used to define segments on digital quad maps. This occurred to some extent with all segments, but was most noticeable in segments with the greatest potential for human errors using a map wheel for calculating the original segment lengths (e.g., long stream segments or entire basins).

Migration to National Hydrography Data (NHD)

New to the 2006 report is use of the 1/24,000 National Hydrography Data (NHD) streams GIS layer. Up until 2006 the Department relied upon its own internally developed stream layer. Subsequently, the United States Geologic Survey (USGS) developed 1/24,000 NHD streams layer for the Commonwealth based upon national geodatabase standards. In 2005, DEP contracted with USGS to add missing streams and correct any errors in the NHD. A GIS contractor transferred the old DEP stream assessment information to the improved NHD and the old DEP streams layer was archived. Overall, this marked an improvement in the quality of the streams layer and made the stream assessment data compatible with national standards but it necessitated a change in the Integrated Listing format. The NHD is not attributed with the old DEP five digit stream codes so segments can no longer be listed by stream code but rather only by stream name or a fixed combination of NHD fields known as reachcode and ComID. The NHD is aggregated by Hydrologic Unit Code (HUC) watersheds so HUCs rather than the old State Water Plan (SWP) watersheds are now used to group streams together. A more basic change was the shift in data management philosophy from one of “dynamic segmentation” to “fixed segments”. The dynamic segmentation records were proving too difficult to manage from an historical tracking perspective.

The fixed segment methods will remedy that problem. The stream assessment data management has gone through many changes over the years as system requirements and software changed. It is hoped that with the shift to the NHD and OIT's (Office of Information Technology) fulltime staff to manage and maintain SLIMS the systems and formats will now remain stable over many Integrated Listing cycles.

Attachment F
Comment and Response

No comments were received during comment period.